

## Commercial Exit Signs

### Caliber Series Architectural Edge-Lit LED



#### Specifier's Reference

Project
Type
Model No.
Comments

#### codes and standards

- UL 924 listed
- UL damp location listing 32°F (0°C) to 104°F (40°C)
- NFPA 101, NEC, IBC, BOCA, and OSHA illumination standard
- NEMA Premium certified
- Meets ADA specifications for wall mounted lighting fixtures
- Certified to the California Energy Commission in accordance with California law

#### construction

- All housing components are premium die cast aluminum construction.
- A range of finishes are available (see Ordering Information below).
- A bar hanger bracket kit is standard for recessed applications.
- The Caliber edge lit exit panel is manufactured from high impact acrylic and silk-screened using computer generated artwork.
- All artwork meets UL and NFPA standards for exit signage.
- Universal self-adhesive chevrons are standard, using a UL recognized PSA.
- Panel is 6" 'EXIT' legend heights.

#### installation

- Universal mounting configurations include recessed ceiling mount, surface ceiling mount, surface end mount and surface wall mount.
- Surface mount configurations mount to a 3.5" octagonal junction box.
- Field selectable chevrons are standard.

#### electronics

- 120/277 VAC dual voltage input with surge protection is standard on all models.
- Self-powered models feature the Intelli-Charge circuit where the charging system is microprocessor driven with software embedded diagnostic routine and temperature compensation.
- Self-powered models include brownout detection, AC lockout, low voltage disconnect, AC power indicator, charge status indicator, audible user-interface controls, visual LED system fault indicator, and tactile push-to-test switch.

- Additional equipment safety features include reverse battery polarity detection and protection, and reverse utility power detection and protection.

- All self powered models include an on board IR receiver for use with the optional hand held remote (ICIR).

#### operating temperature range

- Standard damp location listed: 32°F (0°C) to 104°F (40°C).

#### self-testing electronics (optional)

- The diagnostic/charging platform with optional self-testing mode automatically runs a one-minute self-test every 30 days and a 30 minute test on the sixth and twelfth month in accordance with NFPA 101.
- A one minute or 90 minute test may be initiated via the push to test switch on the unit or by activating the appropriate test command on the optional IR test device.

#### power consumption

- AC only red: (120VAC) 3.80 W, PF = 0.96, (277VAC) 3.80 W, PF = 0.91.
- AC only green: (120VAC) 4.00 W, PF = 0.95, (277VAC) 4.00 W, PF = 0.90.
- Emergency operation red: (120VAC) 4.70 W, PF = 0.95, (277VAC) 4.81 W, PF = 0.97.
- Emergency operation green: (120VAC) 4.71 W, PF = 0.95, (277VAC) 4.67 W, PF = 0.99.

#### lamps

- Illumination of the exit stencil face is accomplished with long-lasting, high output LEDs, producing an average illumination level in excess of 25 fl (79 cd/m<sup>2</sup>) at the end of the 90 minute emergency run time.

#### battery

- Maintenance free sealed nickel cadmium battery.
- Provides a minimum of 90 minutes of emergency power.

#### warranty

- Five full year warranty on electronics and unit.

### Green Product Choice: CN6RCW1IC

Series	Legend Height	Letter/Background Color	Housing Color	# of Faces	IC	Options
CA – Caliber AC Only LED Exit	6 – 6" Exit	RC – Red/Clear <sup>5</sup> GC – Green/Clear <sup>5</sup> RW – Red/White GW – Green/White RM – Red/Mirror GM – Green/Mirror	A – Brushed Aluminum B – Black W – White N – Nickel G – Gunmetal BR – Ornamental Bronze AC – Aged Copper VG – Velvet Green GR – Granite PA – Painted Aluminum	1 – Single Face 2 – Double Face X – Less Panel <sup>4</sup>	IC – Intelli-Charge Diagnostics	2CKT1 – Two-Circuit 120/120 VAC (AC-only models) 2CKT2 – Two-Circuit 277/277 VAC (AC-only models) BF – Buzzer/Flasher (self-powered models only) BZ – Buzzer (self-powered models only) DC – 12-48 VDC Input (AC only models) EX – Special Input Transformer (specify voltage & frequency) <sup>2</sup> FA – Fire Alarm Activated Flasher FL – Flasher (self-powered models only) LBB – Unit-Less Backbox <sup>3</sup> T – Self-Testing Diagnostics (non-audible, self-powered models only) TA – Audible Self-Testing Diagnostics (self-powered models only) SW – Special Wording (consult factory) <sup>2</sup>
CN – Caliber Self-Powered LED Exit						

#### Accessories (Order Separately)

- **BBKIT** – Backbox Rough-In Kit\*\* (must order remainder of product with LBB suffix)
- **BBKITDC** – Backbox Rough-In Kit with DC Option
- **BBKIT2CKT1** – Backbox Rough-In Kit with 2CKT1 Option
- **BBKIT2CKT2** – Backbox Rough-In Kit with 2CKT2 Option
- **ICIR** – Intelli-Charge Infra-Red Remote
- **PKIT12W** – Pendant Kit, 12" White Finish\*
- **PKIT12B** – Pendant Kit, 12" Black Finish\*

\*Custom pendant lengths and colors available, consult factory.

\*\*BBKIT supplied with a clear coat finish for installation above a finished ceiling.

#### Footnotes

<sup>1</sup> For self-testing models refer to options.

<sup>2</sup> Some options may impact the UL listing. Consult factory for specifics.

<sup>3</sup> Required model number for units with back boxes installed on the job.

<sup>4</sup> Order when panels are not required at time of installation. Consult factory for edge-lit panel order number.

<sup>5</sup> Clear background only available on single face.




**options**


- 2CKT1 – Available on AC only configured models to accommodate inputs from a normally on circuit and an AC emergency circuit from a generator or emergency inverter circuit limited to 120 VAC circuits.
- 2CKT2 – Available on AC only configured models to accommodate inputs from a normally on circuit and an AC emergency circuit from a generator or emergency inverter circuit limited to 277 VAC circuits.
- BF – This option enables the exit sign to buzz and flash together when the sign is operating under battery power. The buzzer and flashing rate is an approximate 50% duty cycle.
- BZ – This option enables the exit sign to buzz when the sign is operating under battery power. The buzzer rate is an approximate 50% duty cycle.
- DC – The DC option is reserved for AC only configured models and accommodates wiring to a remote emergency battery unit. The DC input is not polarity sensitive and accepts 12 to 48 VDC from a remote source.
- EX – The special input transformer option allows for input voltage and frequencies beyond the standard 120/277 VAC, 60 Hz input.
- FA – This option provides a two-wire harness for the electrical connection to the fire control panel. Should the fire panel activate an alarm, the exit sign will flash at a rate of approximately 50% duty cycle.
- FL – This option causes the exit sign to flash when the sign is operating under battery power. The flashing rate is approximately a 50% duty cycle.
- T – The self-testing option enables a periodic self-test of the equipment where a test routine is established to perform a one-minute test every thirty days with a 30-minute test performed on the sixth and twelfth month in accordance with NFPA 101. Equipment readiness faults are indicated with a visual LED display.
- TA – The audible self-testing option enables a periodic self-test of the equipment where a test routine is established to perform a one-minute test every thirty days with a 30-minute test performed on the sixth and twelfth month in accordance with NFPA 101. Equipment readiness faults are indicated with a visual LED display and an audible alarm.

**dimensions**


**6" recessed ceiling mount**

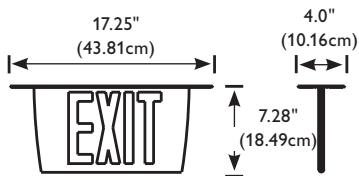


**6" surface end mount**

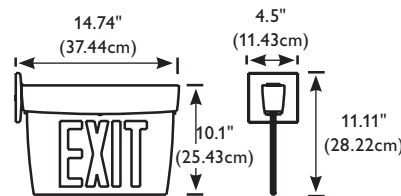

**6" surface wall mount**

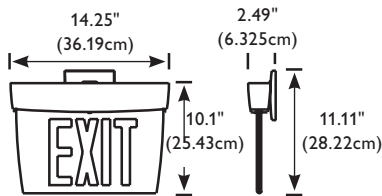

**6" surface ceiling mount**



© 2013 Koninklijke Philips Electronics N.V. All rights reserved. Specifications are subject to change without notice.

CE-10500 03/13

Philips Lighting Company  
200 Franklin Square Drive  
Somerset, NJ 08873  
Phone: 855-486-2216

[www.philips.com/luminaires](http://www.philips.com/luminaires)

Philips Lighting Company  
281 Hillmount Road  
Markham ON, Canada L6C 2S3  
Phone: 800-668-9008

[www.philips.com/luminaires](http://www.philips.com/luminaires)