



KENORA™

Architectural Troffer



SKU #	DLC Model
156658	BLT-10B-22/30/25/20/YDM/CCT(A3+B7)
156659	BLT-10B-24/46/40/35/YDM/CCT(A3+B7)

Beyond LED Technology's KENORA Architectural Panel Troffer combines sleek, modern design with high-performance lighting, making it the perfect solution for commercial, hospitality, and office spaces. Featuring a fully luminous door-frame design, the KENORA provides superior visual comfort while incorporating the latest in solid-state lighting and driver technology for maximum energy efficiency. Available in both 2x2' and 2x4' sizes, this contemporary luminaire offers adjustable wattage and adjustable CCT, allowing for customization to meet the specific needs of different environments. Designed for versatility, the KENORA delivers up to 125 lumens per watt for optimal energy savings, while its 0-10V dimming capability and 110° beam angle ensure precise light control and broad illumination. The fully luminous center panel adds a modern touch, while the optional hanging & surface mount kit provides flexible installation options. Perfect for offices, meeting rooms, and commercial lobbies, the KENORA Architectural Panel Troffer delivers both style and functionality.

Product Features

- Up to 125 lm/W
- Available in 2x2 & 2x4
- Adjustable wattage
- Adjustable CCT
- 0-10V Dimmable
- 110° Beam Angle
- White housing
- Fully luminous center panel
- Input Voltage 120-277VAC
- UL & DLC listed
- 5-year warranty

KENORA™

Architectural Troffer



SKU	ADJ. WATT	MAX LUMENS	ADJ. CCT	INPUT VOLTAGE	CRI	SIZE	LIGHT SPREAD	CONSTRUCTION	DIMMING	CERTIFICATIONS
156658	20W/25W/30W	3750	3500K/4K/5K	120-277V	>80	2x2	110°	Steel+ Aluminum+PC	0-10V	UL & DLC
156659	35W/40W/46W	5750	3500K/4K/5K	120-277V	>80	2x4	110°	Steel+ Aluminum+PC	0-10V	UL & DLC

SKU: 156658

Specifications

Parameter	Description	Value
General Performance	Model #	BLT-10B-22/30/25/20/YDM/CCT(A3+B7)
	Adjustable Wattage	20W / 25W / 30W
	Max Lumen	3750
	Lumen Efficacy	Up to 125LM/W
	Color Temperature	3500K/4000K/5000K
	CRI (Ra)	>80
	Light Spread	110°
	Diffuser Type	Frosted Polystyrene
	Flickering	30%
Electrical	Input Voltage	120-277Vac
	Frequency	50/60Hz
	Dimming	0-10V
	Power Factor	>0.9
	Operating Temperature	-20°C - 50°C
Physical	Operating Humidity	Damp Location
	Storage Temperature	-20°C - 50°C
	Storage Humidity	Damp Location
	LED Brand	Bridgelux
	LED Type	SMT
	Construction	Steel sheet and extruded aluminum
Qualification	Housing Color	White
	IP Rating	IP20
	Warranty	5 Years warranty

ARCHITECTURAL TROFFER



KENORA™

Architectural Troffer

SKU: 156659

Specifications


Parameter	Description	Value
General Performance	Model #	BLT-10B-24/46/40/35/YDM/CCT(A3+B7)
	Adjustable Wattage	35W / 40W / 46W
	Max Lumen	5750
	Lumen Efficacy	Up to 125LM/W
	Color Temperature	3500K/4000K/5000K
	CRI (Ra)	>80
	Light Spread	110°
	Diffuser Type	Frosted Polystyrene
	Flickering	30%
Electrical	Input Voltage	120-277Vac
	Frequency	50/60Hz
	Dimming	0-10V
	Power Factor	>0.9
	Operating Temperature	-20°C - 50°C
Physical	Operating Humidity	Damp Location
	Storage Temperature	-20°C - 50°C
	Storage Humidity	Damp Location
	LED Brand	Bridgelux
	LED Type	SMT
	Construction	Steel sheet and extruded aluminum
Qualification	Housing Color	White
	IP Rating	IP20
	Warranty	5 Years warranty

KENORA™


Architectural Troffer



Correlated Color Temperature (CCT)

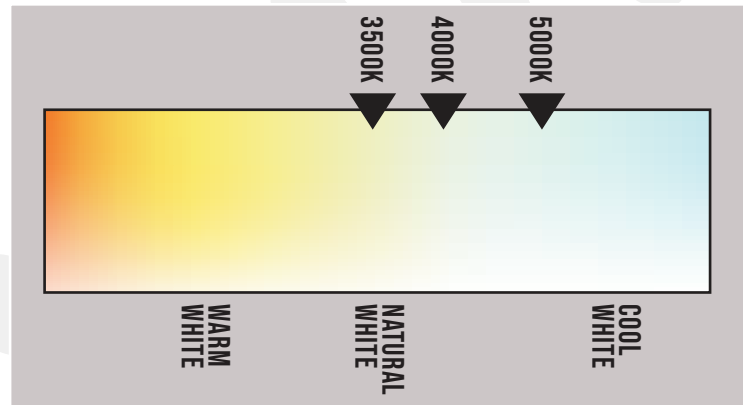

Dimensions

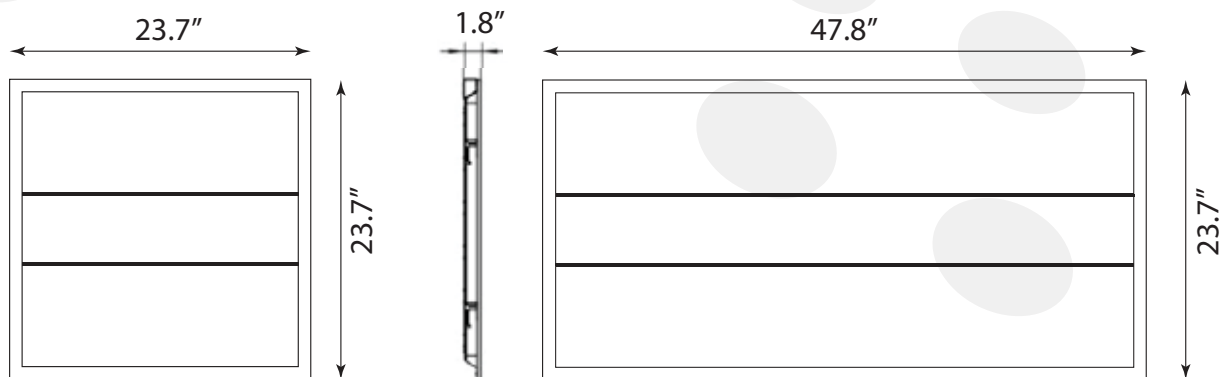

Back-Lit Panel







KENORA™

Architectural Troffer

SKU: 156658

Polar Candela Distribution

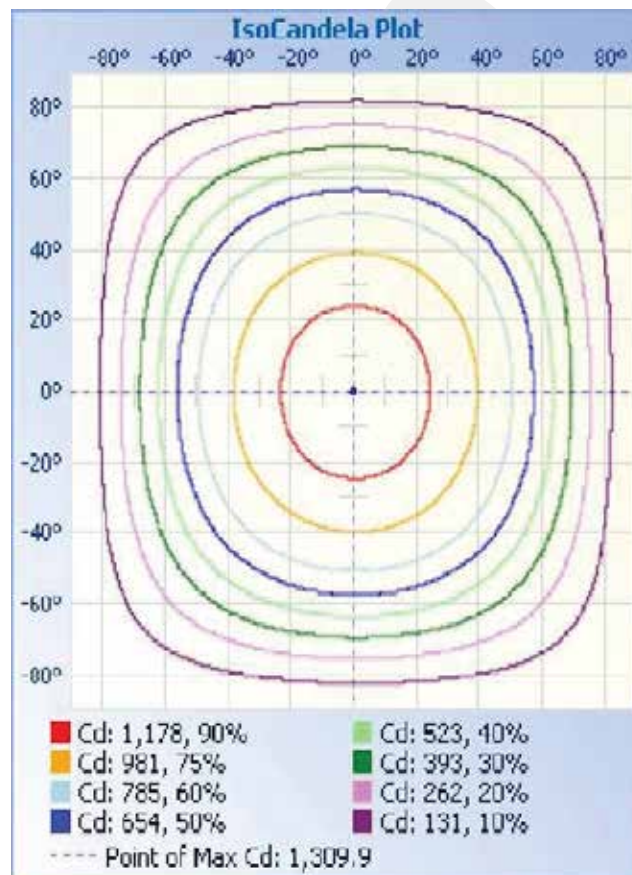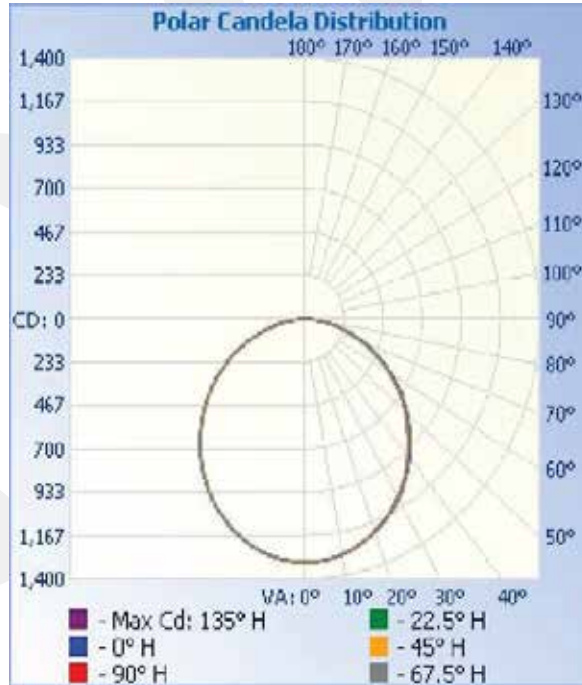

ARCHITECTURAL TROFFER



KENORA™

Architectural Troffer



SKU: 156659

Polar Candela Distribution Iso

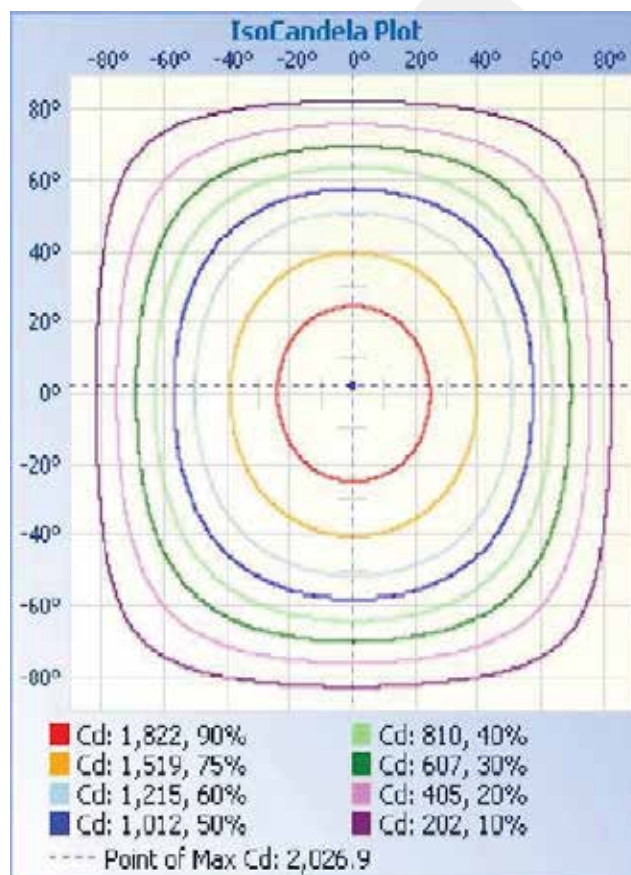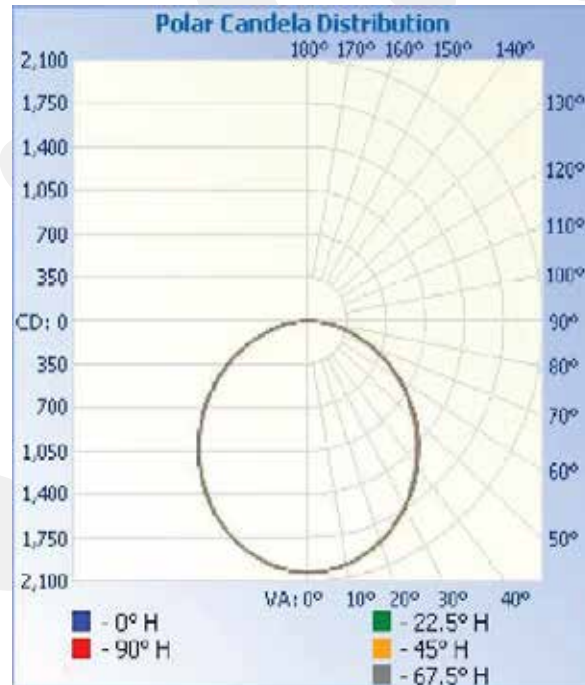

ARCHITECTURAL TROFFER



KENORA™

Architectural Troffer

Installation

⚠ WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

⚠ WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

⚠ CAUTION


- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handling fixture.

NOTICE: Green ground screw provided in proper location. Do not relocate.

NOTICE: Minimum 90° supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp location, Type IC

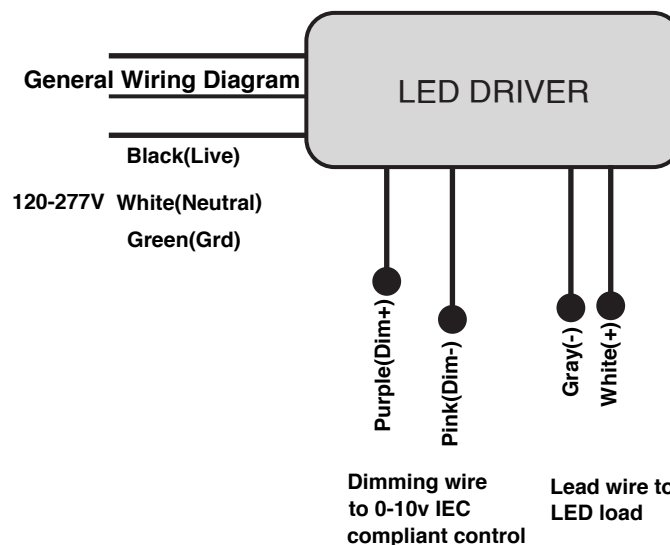

KENORA™

Architectural Troffer




Installation

INSTRUCTIONS:

Always turn off the power supply from main circuit breaker first!


• Recessed Mounting

Figure 1

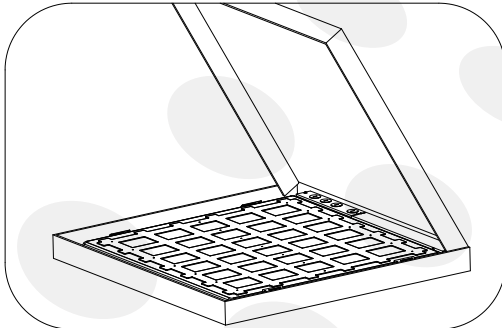


Carefully unpack unit and properly inspect for defects before installing. Wear work gloves to prevent dirt and oil from being transferred to the luminaire. If cleaning is needed, use gloves and a dry cottoncloth. It is not recommended to use hazardous chemicals.

Figure 2

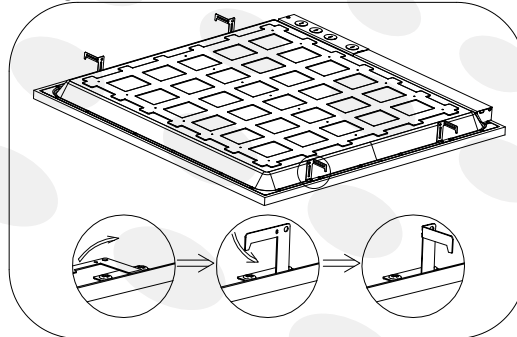


Lift up four mounting clips on the sides of the luminaire. You can do it by hand (Do wear work gloves) or use pliers

Figure 3

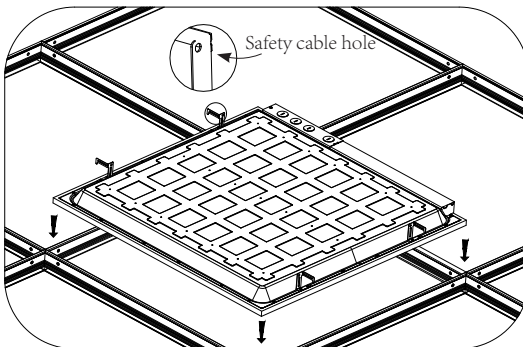


Insert luminaire into T-bar ceiling grid. Secure safety cable to connection hole as needed to meet local seismic requirements. Safety cable and method of attachment to the building provided by contractor according to local building codes.

Figure 4

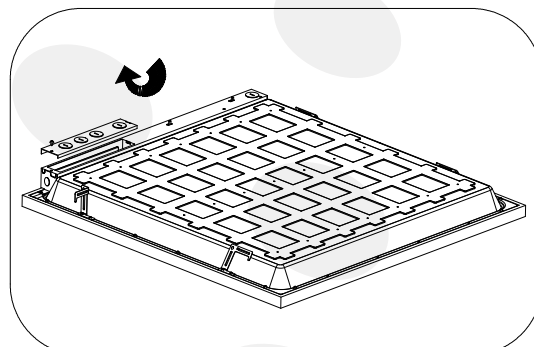


Remove electrical enclosure cover. Carefully remove knockout for AC line input wires and 0-10V control line. Install listed electrical fittings in the knockout holes for wire protection if needed.

Figure 5

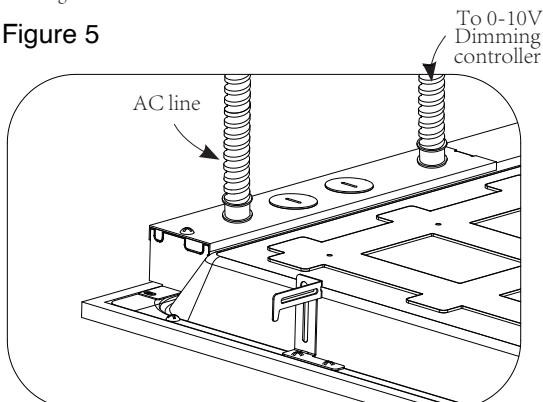

Plug in AC line (L and N, and GND) to the LED Driver using 18-14AWG Wire. When connecting 0-10V dimming controller, wires must run through a separate knockout hole equipped with an appropriate electrical fitting.

Figure 6

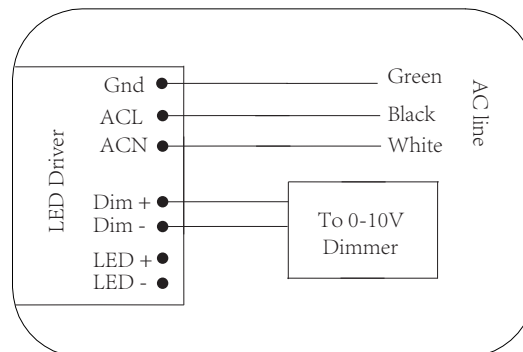

Follow wire connection instructions. When using the 0-10V dimming controller Run wires from controller through a different knockout than the AC input wire. Don't forget to return the electrical enclosure cover and tighten the screws.



KENORA™

Architectural Troffer

Installation

Cable Suspended Mounting

Figure 1


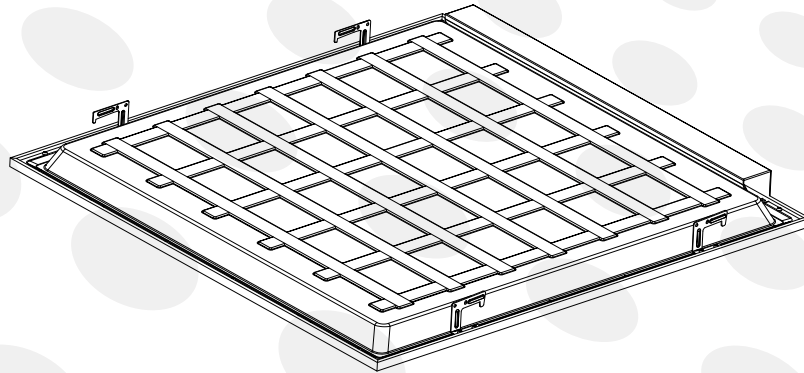


Figure 2

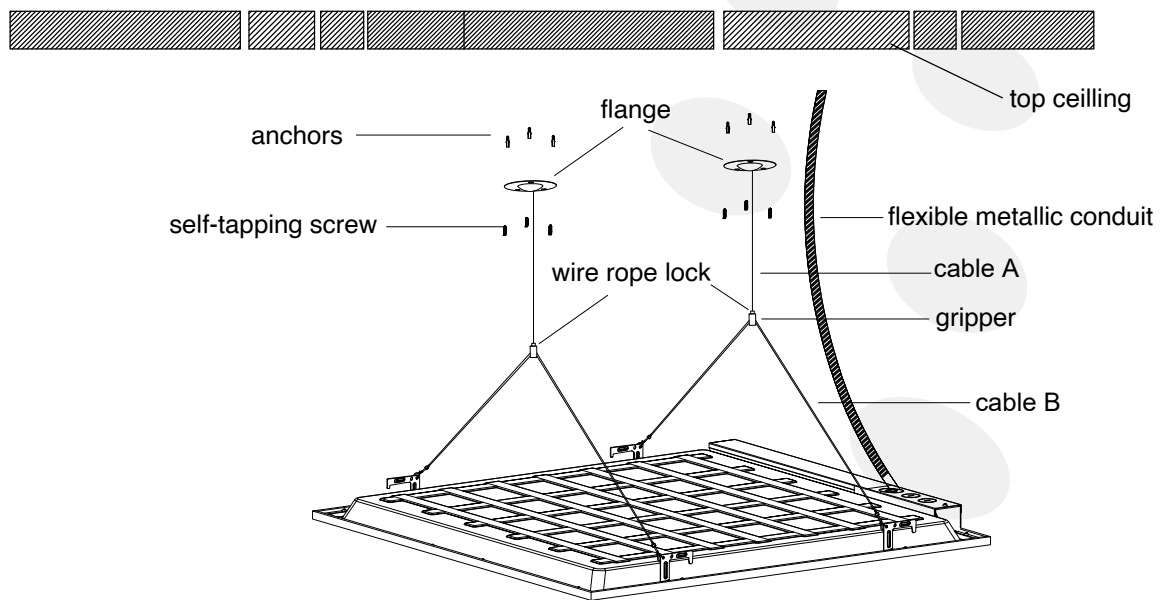

Installation Steps:

- Step 1: Pull the sleeve on the end of cable A through the provided flange and make sure the end cap positioned in the flange. Fix the flanges onto the ceiling with the self-tapping screws.
- Step 2: Insert the end of cable A into the wire rope gripper attached on the cable B, then adjust the cable A to be desired height by pressing the wire rope lock and adjust the cable B to the desired angle.
- Step 3: Hook the luminaire up to the swivel lobster clasp attached to the two ends of cable B and make a final adjustments.
- Step 4: Connect LED driver to AC mains power.


KENORA™

Architectural Troffer



Installation

Field-Adjustable Wattage & CCT

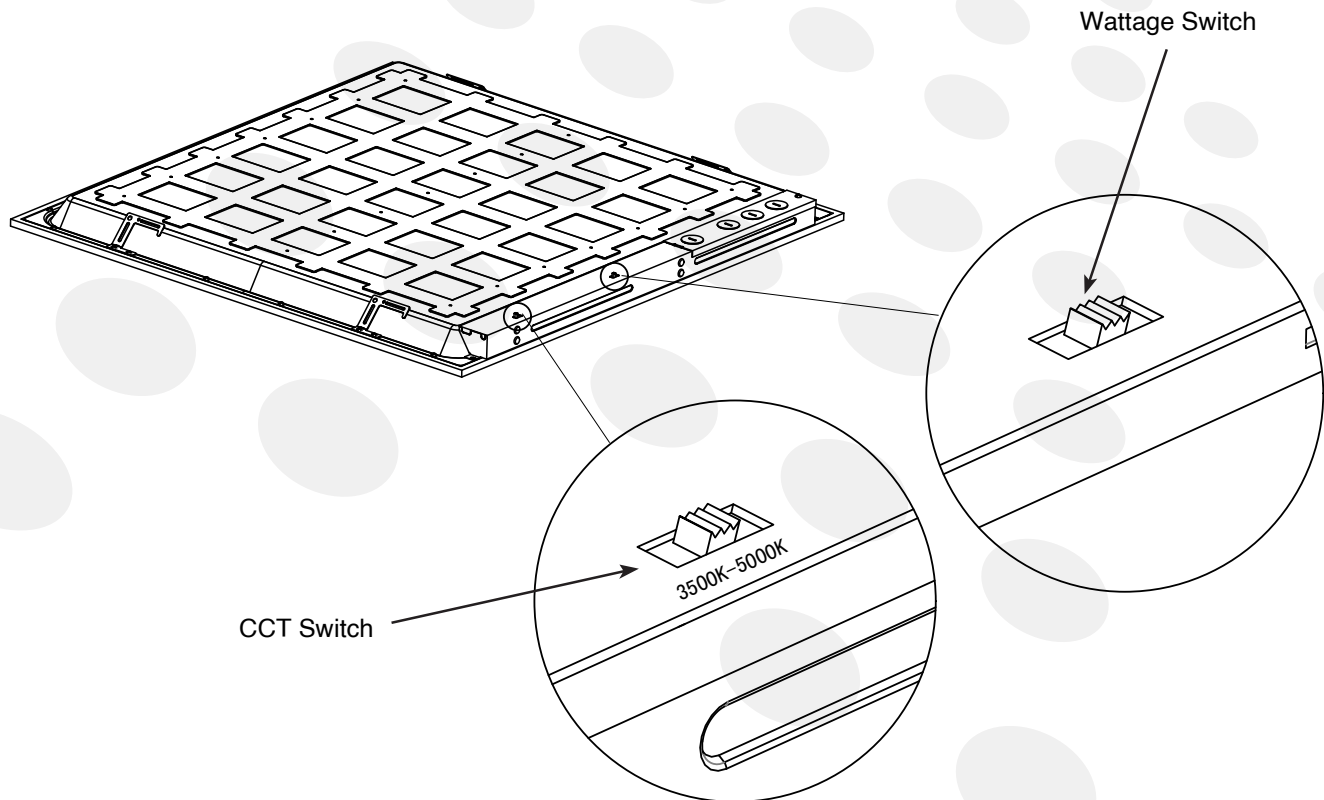

The end users may adjust the color temperature and lumen output respectively by the two DIP switch buttons integrated into the driver. Each DIP switch is accommodated with 3 options (left, middle and right), corresponding to 3 color temperatures and 3 powers respectively, which can perform the desired color temperature and lumen output combination.

1. DIP switches are located onto the drive box.
2. Select a wattage and color temperature by sliding switch left or right respectively to the desired value.



KENORA™

Architectural Troffer

Packaging

SKU #.	Box Dimension	Size	Qty.	Net Weight	Gross Weight
156658	25.47" x 7.28" x 25.78"	2 x2FT	4 Pcs/Box	20.28LBS	22.49LBS
156659	49.48" x 7.28" x 25.78"	2 x4FT	4 Pcs/Box	36.16LBS	39.02LBS

Application Image



KENORA™

Architectural Troffer



Application Image



ARCHITECTURAL TROFFER

Warranty

This product is covered under a 5-year warranty. For complete warranty details, [Click Here.](#)