


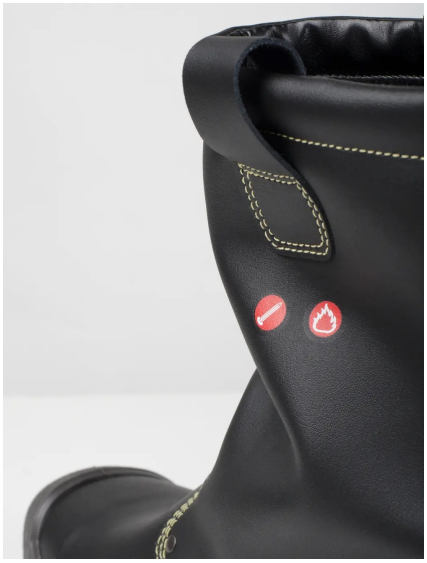

jalas® GRAN PREMIO 1868W KING

ASTM F2413-18 M/I/C/SD 35/PR EN ISO 20345:2011 S3, SRC, CI, HRO, HI, WG EN ISO 20349-2:2017 S3, SRC, CI, HRO, HI, WG

Learn more

HIGH BOOT FOR HOT WORK

Comfortable high boot with highest level of protection, for hot work with features such as wide last and heat-resistant upper and outsole. Perfect for welders. Specially treated leather with heat resistance para-aramid thread in the seams provides a max operating heat limit of 400°C/752°F for 30 minutes. Nail protection insert in steel, toecap in aluminium and double impact protection zones in PORON® XRD® help prevent injuries.

CHARACTERISTICS

- Highest level of protection
- Excellent grip
- Perfect fit
- Extra comfortable
- Excellent shock absorption

FUNCTIONS

- ProNose toe reinforcement
- Thinsulate™ heat insulation
- Wide fit
- KEVLAR® thread in the seams which resists 427° C short-term heat exposure (max operating limit) and 204° C longer-term heat exposure (constant operating limit)
- Heat-resistant upper
- Heat-resistant outsole
- Oil-resistant outsole
- Anti-static properties
- Padded boot shaft
- Ventilating insole
- Pull loops
- Water repellent
- Double shock absorption zones

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.

PREVENTS RISK OF
Toe injuries, Nail penetration, Antistatic

PRIMARY ENVIRONMENTS OF USE
Outdoors, Indoors, All-year use, Warm surfaces, Environments with risk for outsole penetration, Harsh environments

PRIMARY AREAS OF USE
Hot work, Mining, Sheet-metal work, Welding

PRIMARY INDUSTRIES OF USE
Basic metals manufacturing

SPECIFICATION
TYPE Safety footwear, Boots
CATEGORY Cat. II
NAIL PROTECTION MATERIAL Steel
FITTING Wide
COLLECTION Gran Premio
UPPER MATERIAL PU-coated leather
PRONOSE MATERIAL PU
TOECAP MATERIAL Aluminium
LINING MATERIAL Polyester, Thinsulate™
INSOLE JALAS 8103 FX2 Pro-X
INNERSOLE MATERIAL Textile, Soft EVA, Polyester-based conductive thread, Double shock absorption zones in PORON® XRD®
MIDSOLE MATERIAL PU midsole
OUTSOLE MATERIAL Nitrile rubber outsole
COLOUR Black
NET WEIGHT, (SIZE 42) 1.49 kg

COMPLIANCE
CE Cat. II

EAC TP TC 019:2011

ASTM F2413-18
M/I/C/SD 35/PR

EN ISO 20345:2011
S3, SRC, CI, HRO, HI, WG

EN ISO 20349-2:2017
S3, SRC, CI, HRO, HI, WG

FEATURES
- Anti-static properties
- Ergothan Shock Absorption System
- ESD
- Heat-resistant upper
- Aluminium toecap
- Oil-resistant outsole
- ProNose toe reinforcement
- Nail protection in steel
- Wide fit
- Heat-resistant outsole
- Water repellent

SIZE				ARTICLE NUMBER	EAN
EU	UK	US M	US W		
35	2	3.5	4	1868W-35	6408487522925
36	3	4	5	1868W-36	6408487522963
37	4	5	6	1868W-37	6408487523007
38	5	5.5	6.5	1868W-38	6408487523045
39	6	6.5	7.5	1868W-39	6408487523083
40	6.5	7.5	8.5	1868W-40	6408487523120
41	7	8	9	1868W-41	6408487523168
42	8	9	10	1868W-42	6408487523205
43	9	9.5	11	1868W-43	6408487523243
44	10	10.5	11.5	1868W-44	6408487523281
45	10.5	11	12.5	1868W-45	6408487523328
46	11	12	13	1868W-46	6408487523366
47	12	13	14	1868W-47	6408487523403
48	13	13.5	14.5	1868W-48	6408487523441
49	14	14.5	15.5	1868W-49	6408487523489
50	15	15.5	16.5	1868W-50	6408487523526

ejendals
Limavägen 28, SE-793 32 Leksand, Sweden
Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com

All values for the specified product are indicated without tolerances and may vary to actual value for individual products. We reserve the right to modify or update the information in this document without prior notice.