



1'x4'



2'x2'



2'x4'

## 1' x 4', 2' x 2' & 2' x 4' Backlit Panels


### Applications:

- ----
- ----
- ----

### Product Information:

- Flicker-free integrated driver, 0-10V dimmable
- Backlit design provides diffuse, shadowless light
- No UV, no RF, non-yellowing PMMA lens
- Powder-coated white frame




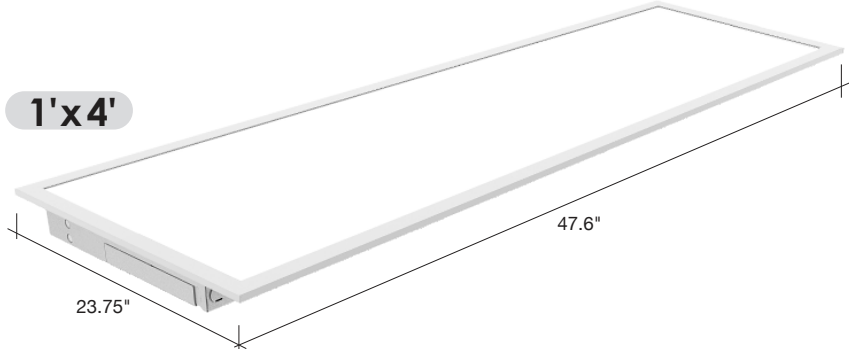

1'x4'

23.75"


47.6"

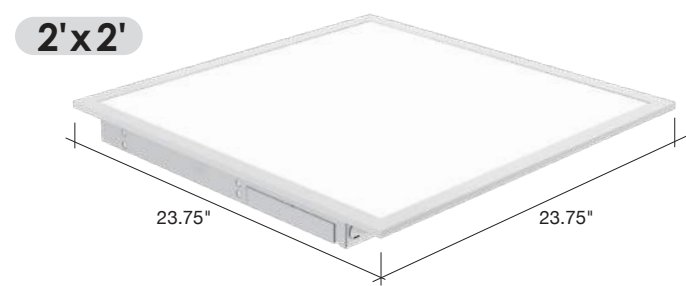

2'x2'

23.75"

23.75"

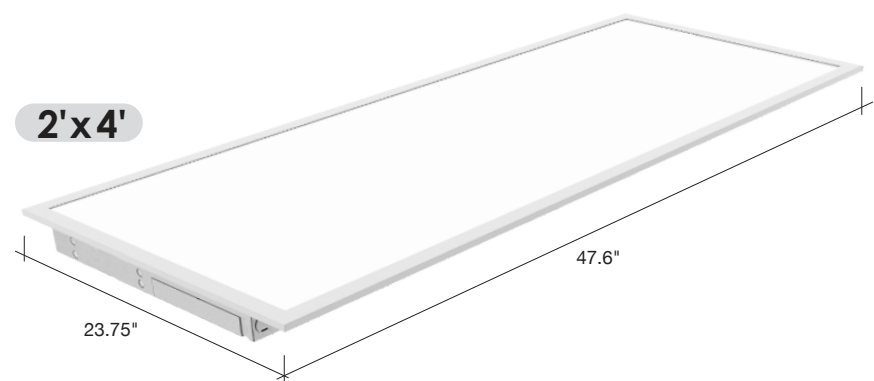

2'x4'

23.75"

47.6"



3"



Selectable Wattage



Selectable CCT



Knockouts



End Knockout




Aluminum Trim



Mounting Clips

- 40 Watt
- 6550 Lumens
- Dimmable
- Integrated LED
- IP20 Rated
- 120-277V

**RETAIL READY STAND OUT PACKAGING**

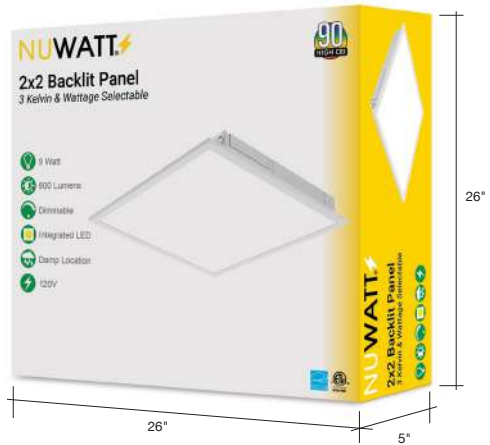

26"

26"

5"

Packaging subject to size change based on product size





### 1" X 4" BACKLIT PANEL

NW-BL-1X4-20.30.40W-3CT

|                   |                                        |
|-------------------|----------------------------------------|
| <b>LUMENS</b>     | 20W- 2,600<br>30W- 3,900<br>40W- 5,200 |
| <b>WATTAGE</b>    | 20W/30/40W                             |
| <b>VOLTAGE</b>    | 120/277V                               |
| <b>TRIM</b>       | WH- White                              |
| <b>COLOR TEMP</b> | 35/40/50K                              |
| <b>BEAM ANGLE</b> | 120°                                   |
| <b>LIFE HOURS</b> | 50,000                                 |
| <b>CRI</b>        | 80                                     |
| <b>DIMMABLE</b>   | 0-10V Commercial Dimmer                |

### 2" X 2" BACKLIT PANEL

NW-BL-2X2-20.30.40W-3CT

|                   |                                        |
|-------------------|----------------------------------------|
| <b>LUMENS</b>     | 20W- 2,600<br>30W- 3,900<br>40W- 5,200 |
| <b>WATTAGE</b>    | 20W/30/40W                             |
| <b>VOLTAGE</b>    | 120/277V                               |
| <b>TRIM</b>       | WH- White                              |
| <b>COLOR TEMP</b> | 35/40/50K                              |
| <b>BEAM ANGLE</b> | 120°                                   |
| <b>LIFE HOURS</b> | 50,000                                 |
| <b>CRI</b>        | 80                                     |
| <b>DIMMABLE</b>   | 0-10V Commercial Dimmer                |

### 2" X 4" BACKLIT PANEL

NW-BL-2X4-30.40.50W-3CT

|                   |                                        |
|-------------------|----------------------------------------|
| <b>LUMENS</b>     | 35W- 3,900<br>40W- 5,200<br>50W- 6,500 |
| <b>WATTAGE</b>    | 30W/40/50W                             |
| <b>VOLTAGE</b>    | 120/277V                               |
| <b>TRIM</b>       | WH- White                              |
| <b>COLOR TEMP</b> | 35/40/50K                              |
| <b>BEAM ANGLE</b> | 120°                                   |
| <b>LIFE HOURS</b> | 50,000                                 |
| <b>CRI</b>        | 80                                     |
| <b>DIMMABLE</b>   | 0-10V Commercial Dimmer                |