


KAS-C

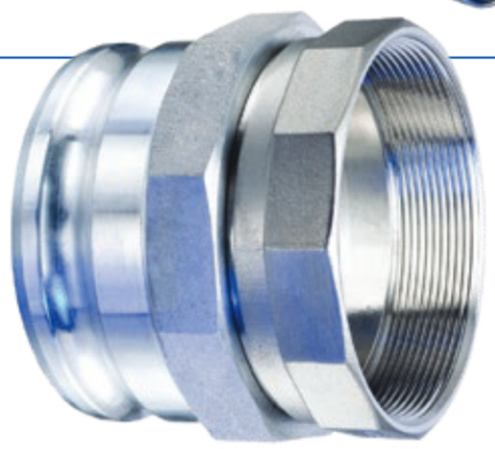

KAS-E

KAS-C Series
(Aluminum Part C x NPT Swivel)
Female Coupler X Female NPT Swivel

KAS-E Series
(Aluminum Part E x NPT Swivel)
Male Coupler X Female NPT Swivel

VIEW ONLINE

SCAN FOR INFO
or visit
KOA.link/KAS

GENERAL APPLICATIONS
Kuriyama Camlock Couplings are intended for use in many industrial applications. To learn more, please refer to pages 296-297 in this catalog.

FEATURES AND ADVANTAGES
- High quality design to withstand rigorous applications found in industrial markets.
- Specially designed swivel coupling supplied with a Buna-N O-Ring minimizes the torque and twisting that occurs when a hose is in service.
- Supplied with forged brass handles which results in less wear on connecting parts.

MATERIAL SPECIFICATIONS
- ASTM aluminum alloy.
- Complies with Mil-Spec A-A-59326 for interchangeability.
- Buna-N gasket included.

Part Number	Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
KAS-C401	4	150	B26 Grade 713	5.20	1
KAS-C501	5	75	B26 Grade 713	6.53	1
KAS-C601	6	50	B26 Grade 713	10.49	1

Part Number	Size (in)	PSI Rating at 70°F	ASTM Specification	Weight Each (lbs)	Standard Carton
KAS-E401	4	150	B26 Grade 713	4.67	1
KAS-E501	5	75	B26 Grade 713	5.42	1
KAS-E601	6	50	B26 Grade 713	6.97	1

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.