
Duplex Circuit Breakers

Breaker Type	Ampere Rating	Catalog Number	Catalog Number
QT **1-Pole** **10K AIC** **120V AC**	15–15	**Q1515**	**Q1515NC**①
	15–20	**Q1520**	**Q1520NC**①
	20–20	**Q2020**	**Q2020NC**①
	20–30	**Q2030**	—
	30–15■	**Q3015**	—
	30–20	**Q3020**	—
	30–30	**Q3030**	**Q3030NC**①
	SHIPPING: 12 per carton, (Wt. 4.8 lbs.)		




QT Duplex

These space saver duplex breakers combine two independent 1/2" breaker poles in a common unit. This unit plugs into one load center stab and requires one panel space. HACR rated.

Triplex Circuit Breakers

Breaker Type	Ampere Rating: Single Pole	Ampere Rating: Common-Trip 2-Pole	Catalog Number
QT **2-Pole** **10K AIC** **120/240V AC** **Inner Poles** **Common Trip**	15	15	**Q21515CT**
	15	20	**Q21520CT**
	15	25	**Q21525CT**■
	15	30	**Q21530CT**
	15	35	**Q21535CT**■
	15	40	**Q21540CT**
	15	45	**Q21545CT**■
	15	50	**Q21550CT**
	20	20	**Q22020CT**
	20	25	**Q22025CT**■
	20	30	**Q22030CT**
	20	35	**Q22035CT**■
	20	40	**Q22040CT**
	20	45	**Q22045CT**■
	20	50	**Q22050CT**
	30	30	**Q23030CT**
	SHIPPING: 6 per carton, (Wt. 4.9 lbs.)		

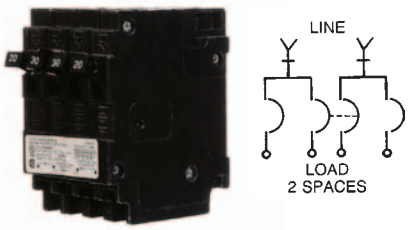


QT Triplex

These space saver triplex breakers provide a 2-pole common trip breaker for 120/240V AC circuits and two single poles for 120V AC circuits. Triplex require two panel spaces. HACR rated.

Quadplex Circuit Breakers

Breaker Type	Ampere Rating: Common-Trip 2-Pole Outside	Ampere Rating: Common-Trip 2-Pole Inside	Catalog Number
QT **2-Pole** **10K AIC** **120/240V AC** **Inner and** **Outter 2 Poles** **Common Trip**	15	15	**Q21515CT2**
	15	30	**Q21530CT2**
	20	20	**Q22020CT2**
	20	50	**Q22050CT2**
	30	20	**Q23020CT2**
	30	25	**Q23025CT2**
	30	30	**Q23030CT2**
	30	50	**Q23050CT2**
	40	20	**Q24020CT2**
	40	30	**Q24030CT2**
	40	40	**Q24040CT2**
	SHIPPING: 6 per carton, (Wt. 4.8 lbs.)		

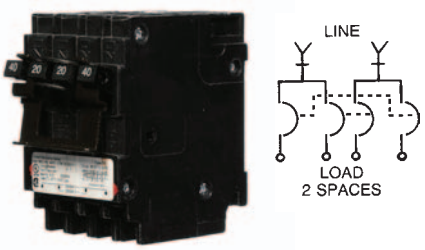

QT Quadplex

These space saver quadplex breakers provide two sets of common trip, two-pole breakers for 120/240V AC circuits, and require two panel spaces. HACR rated.

For external accessories, please refer to page 1-48.

For inches / millimeters conversion, see Application Data section.

■ Built to order. Allow 2–3 weeks for delivery.

① Non-CTL. For replacement use only in panels manufactured before 1968