


TYPE LS LSN

Features

- Body is manufactured from copper alloy
- Eye-bolts are made from an aluminum bronze alloy
- Available in two mounting surface thickness ranges

Benefits

- Provides maximum conductivity
- Offers maximum strength
- Mountable to flat studs or spades on equipment as well as grounding conductor to steel substation structures

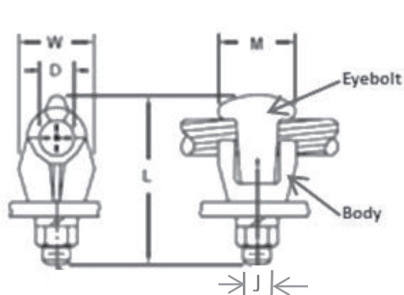

C

Catalog Number	Wire Range	Dimensions - in. (mm)					Hex
		D	L	M	W	J	
LSN-2/0N*	2/0str-8sol	0.438 (11.1)	2.375 (60.3)	1.375 (34.9)	1.000 (25.4)	1/2	3/4
LSN-025N*	250kcmil-6sol	0.625 (15.9)	2.563 (65.1)	1.250 (31.8)	1.063 (27.0)	1/2	3/4
LSN-035N*	350kcmil-2sol	0.813 (20.6)	3.063 (77.8)	1.250 (31.8)	1.313 (33.3)	1/2	3/4
LS-C1E+	1str-10sol	0.344 (8.73)	2.375 (60.3)	1.063 (27.0)	0.875 (22.2)	3/8	9/16
LSN-025NE+	250kcmil-6sol	0.625 (15.88)	3.063 (77.8)	1.250 (31.8)	1.063 (27.0)	1/2	3/4
LSN-035NE+	350kcmil-2sol	0.813 (20.64)	3.313 (84.1)	1.250 (31.8)	1.313 (33.3)	1/2	3/4
LSN-100NE+	1000kcmil-2/0sol	1.250 (31.75)	4.500 (114.3)	1.719 (43.7)	1.688 (42.9)	1/2	3/4

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

"N" in prefix qualifies terminal for mounting on NEMA pads

"N" in suffix qualifies eye-bolt opening to NEMA

*Up to a 1/4" mounting surface

+1/4" to 3/4" mounting surface


TYPE
LS
LSN

Features

- Body is manufactured from copper alloy
- Eye-bolts are made from an aluminum bronze alloy
- Available in two mounting surface thickness ranges

Benefits

- Provides maximum conductivity
- Offers maximum strength
- Mountable to flat studs or spades on equipment as well as grounding conductor to steel substation structures

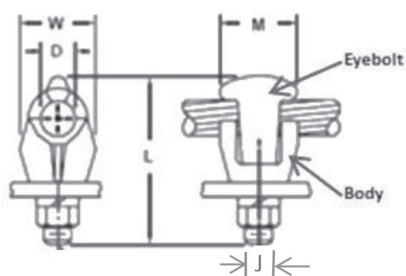

Catalog Number	Wire Range	Dimensions - in. (mm)					Hex Size
		D	L	M	W	J	
LSN-2/0N*	2/0str-8sol	0.438 (11.1)	2.375 (60.3)	1.375 (34.9)	1.000 (25.4)	1/2	3/4
LSN-025N*	250kcmil-6sol	0.625 (15.9)	2.563 (65.1)	1.250 (31.8)	1.063 (27.0)	1/2	3/4
LSN-035N*	350kcmil-2sol	0.813 (20.6)	3.063 (77.8)	1.250 (31.8)	1.313 (33.3)	1/2	3/4
LS-C1E+	1str-10sol	0.344 (8.73)	2.375 (60.3)	1.063 (27.0)	0.875 (22.2)	3/8	9/16
LSN-025NE+	250kcmil-6sol	0.625 (15.88)	3.063 (77.8)	1.250 (31.8)	1.063 (27.0)	1/2	3/4
LSN-035NE+	350kcmil-2sol	0.813 (20.64)	3.313 (84.1)	1.250 (31.8)	1.313 (33.3)	1/2	3/4
LSN-100NE+	1000kcmil-2/0sol	1.250 (31.75)	4.500 (114.3)	1.719 (43.7)	1.688 (42.9)	1/2	3/4

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

"N" in prefix qualifies terminal for mounting on NEMA pads

"N" in suffix qualifies eye-bolt opening to NEMA

*Up to a 1/4" mounting surface

+1/4" to 3/4" mounting surface