

VHT-XX | Lobe knobs for position indicators

Technopolymer

INCH

RoHS

PA

+212 °F
+32 °F

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- RH

MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

STANDARD EXECUTIONS

Black-oxide steel boss, standard reamed hole, fitting to shaft by means of a supplied grub screw with hexagon socket and cup end UNI 5929-85.

- **VHT-GXX**: for gravity indicators.

- **VHT-PXX**: for positive drive indicators.

Rear flange with internal crown gear wheel in acetal resin based (POM) technopolymer. Black-oxide steel screw and anchor pin.

FEATURES AND APPLICATIONS

The lobed shape with no cavities prevents unhealthy residues from depositing. Particularly suitable for applications on machines and equipment whose parts must be frequently cleaned by using water jets or steam.

INDICATOR CHOICE (TO BE ORDERED SEPARATELY)


To choose the indicator see the table for possible assembly with indicators. See also "Assembly instructions" for gravity indicators type G or positive drive indicators type P.

ACCESSORIES ON REQUEST

Cover CP-XX for use without the indicator.



ELESA Original design

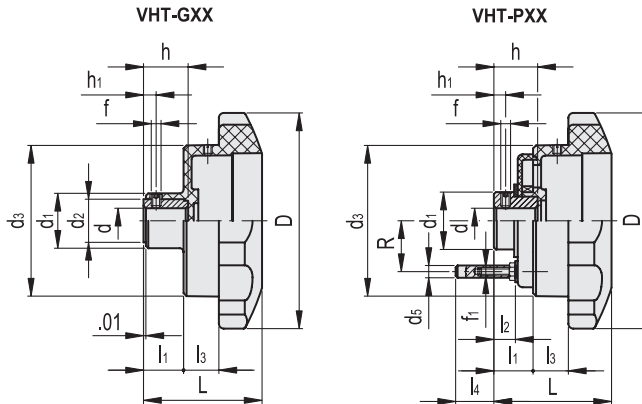

INCH

VHT-GXX

Code	Description	D	L	d	h	d1	d2	d3	f	h1	l1	l3	⚖	Indicators combinations
CE930255	VHT.85-GXX1 A-5/16	3.35	2.01	0.312	0.67	0.94	0.71	2.28	M5	0.24	0.61	0.71	0.24	GA01 - GA11
CE930351	VHT.110-GXX2 A-3/8	4.33	2.28	0.375	0.87	1.1	0.87	3.03	M5	0.24	0.79	0.71	0.4	GA02 - GA12 - GW12
CE930355	VHT.110-GXX2 A-1/2	4.33	2.28	0.500	0.87	1.1	0.87	3.03	M5	0.24	0.79	0.71	0.39	GA02 - GA12 - GW12

INCH

VHT-PXX

Code	Description	D	L	d	h	d1	d3	d5	f	f1	h1	l1	l2	l3	l4	R	⚖	Indicators combinations
CE930252	VHT.85-PXX1 A-5/16	3.35	2.17	0.312	0.81	0.71	2.28	0.24	M5	M4	0.2	0.73	0.41	0.71	0.57	0.75	0.29	PA01 - PA11
CE930352	VHT.110-PXX2 A-3/8	4.33	2.28	0.375	0.87	1.18	3.03	0.24	M5	M4	0.24	0.79	0.47	0.71	0.52	1.12	0.64	PA02 - PA12 - PW12

Position indicators