


## All Purpose Pipe Dope

---

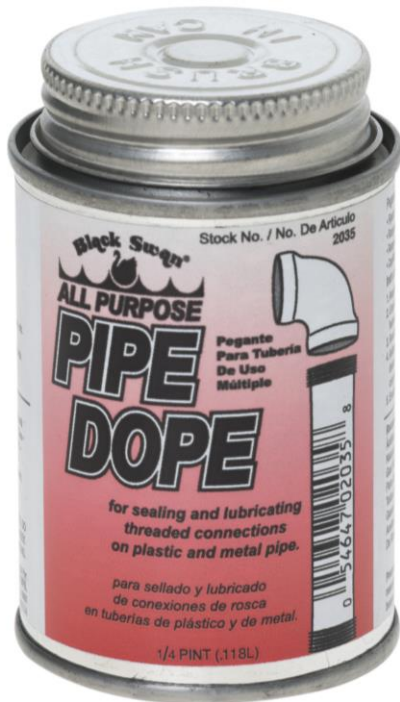

---

### DESCRIPTION

**Black Swan's All Purpose Pipe Dope** is a yellow, soft-set, non-toxic pipe joint compound. Provides leak-proof resistance to high pressure, temperature expansion, contraction and extreme vibration. Excellent for food and potable water systems. Contains no lead. NSF Certified.

---

### PHYSICAL PROPERTIES

Temperature range use: Gases and Liquids from -50° F (-45° C) to +400° F (+204° C)  
Pressure range use: Gases up to 3,000 PSI    Liquids up to 6,000 PSI  
Brushable to: -50° F (-45° C)  
Sets up to: Soft-set, non-hardening  
Contents: Non-toxic inert oils and carbonates. Contains no lead or silicone.

---

## APPLICATIONS

**Black Swan's All Purpose Pipe Dope** is recommended for use on ABS, PVC, CPVC, FlowGuard Gold® CPVC, BlazeMaster® CPVC, fiberglass, nylon, polypropylene, celcon, cycolac, polybutylene, delrin, polyethylene, zytel and all metals.

All Purpose Pipe Dope is recommended for lines carrying:

Acids, Diluted	Freons (All)	Propane
Air, Compressed Gaseous	Gasoline	Mineral Oils
Alkalis, Diluted	Glycol	Natural Gas
Ammonia	Heating	Nitrogen, Gaseous
Aliphatic Solvents	Helium, Gaseous	Petroleum Solvents
Brine	Hydraulic Oils	Refrigeration Gases
Butane	Hydrogen	Soap, Liquid
Carbon Dioxide	Inert Gases, Gaseous	Steamlines
Castor Oils	Jet Fuel (JP 3, 4, & 5)	Sugar, Liquid
Chlorinated Water	Kerosene	Vegetable Oil
Coal Tar Naptha	Lacquer	Water (Hot or Cold)
Cutting Oils	Liquified Petroleum Gases	
Diesel Fuel Oil	Manufactured Gases	

---

## DIRECTIONS

1. Make sure threads are made with a good die.
  2. Clean surface to which the compound is to be applied of dirt, oil, moisture, etc.
  3. Stir before using. Do not dilute.
  4. Apply compound to male threads with brush or applicator. Brush well into threads to ensure leak-free joints. Cover threads completely.
  5. Assemble joints in usual manner.
-

## CAUTION

Keep out of reach of children and pets. Do not allow to be taken internally. If swallowed seek immediate attention. Do not induce vomiting.

---

### UPC NUMBER AND CARTON INFORMATION

STOCK NO.	SIZE	UPC NUMBER	CARTON CUBIC FEET
02034*	1 fl. oz. tube	0 54647 02034 1	.056
02035^	1/4 pt.	0 54647 02035 8	.222
02040^	1/2 pt.	0 54647 02040 2	.363
02045^	pt.	0 54647 02045 7	.376
02050^	qt.	0 54647 02050 1	.711
02051	gal.	0 54647 02051 8	.776
02052	5 gal.	0 54647 02052 5	1.375
*Hang-tab tubes in display tray ^Brush in can			