




PyroGuard FR®

PyroGuard FR® is designed to be worn over primary FR apparel to extend its life and to protect it from dirt, grease, non-toxic liquids, sparks, and flames.


All PyroGuard FR® garments pass the ASTM D6413 vertical flame resistance test. Fabric is breathable and chars to prevent molten drips and stop flames in their tracks. Recommended applications include refinery turnarounds, oil & gas, manufacturing, industrial settings, and more.

Available Garments




**Coverall with
elastic wrists
and ankle**

#9012
25 per case



**Coverall with
attached hood,
elastic wrists
and ankles**

#9015
25 per case




**Coverall with
attached hood
and boots,
elastic wrists**

#9019
25 per case

Testing

TEST	TEST METHOD	RESULTS
Grab / Tensile - Machine Direction	ASTM D5034-2001	34 lbs.
Grab / Tensile- Cross Direction	ASTM D5034-2001	26 lbs.
Vertical Flammability - Machine Direction	ASTM D6413	Pass
Vertical Flammability - Cross Direction	ASTM D6413	Pass

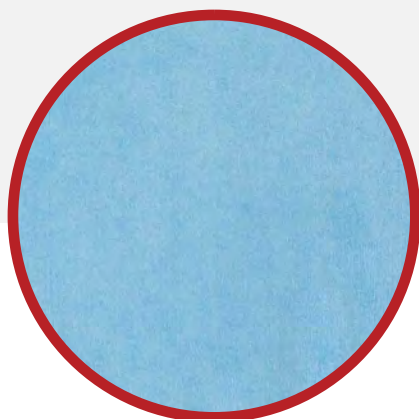

Breathable Fabric



Tunnelized Elastic



Storm Flap



Fire Retardant

Phosphate-based fire retardant deprives flames of their fuel source so they can't spread.



Keep Contaminants Out

A storm flap over the zipper helps prevent contaminants from entering clothing through exposed seams.



Breathable

Fabric has a high moisture vapor transmission rate (MVTR) allowing wearers to feel cooler.



Vertical Flame Protection

All clothing passes ASTM D6413 Vertical Flame Testing.



Move with Ease

An elastic back stretches with the wearer for more comfort and better tear resistance.



NFPA Compliant

Clothing meets the NFPA 2113 requirement for section 5.1.9.

