



c **UL** [®] **US** **RoHS** **ISO9001**



Input Voltage (V)			480/347
Max Input Circuit (A)			1.00/1.38
Max Output Circuit (A)			1.87
Max. Load(VA)			450
Output Voltage (V)			240
Full Load	EFF. (%)		93/94
	THD (%)		3.4/3.8
	Power Factor		0.991/0.991
UL Class H 180 Temp. Code			A
Dimension (inches/mm)	Basic dimensions	A*	2.95±0.04/75±1
		B(Max)	4.25/108
		W	2.64±0.04/67±1
		H	2.20±0.04/56±1
	Installation dimensions	M1	2.27/57.6
		M2	3.69±0.04/93.6±2
		M3	0.96/24.4
		M4	3.90±0.04/99±2
		L	4.13±0.04/105±2
Max Net Weight (lbs)			4.60
Max Net Weight + LW (lbs)			4.69
Lead Length (inches)			8±0.5

A* not covered the thickness of the two holders

*Lead Type: (AVLV2, AVLV8), Type 3135, No. 18 AWG (or Equivalent), rated 200°C, 600 V. Strip 10mm Tin Plated.
347V lead wire is pre-insulated.

Product Standards: UL 5085-1, UL 5085-2
UL CCN: XPTQ2, XPTQ8

Model No.	MTM04506224C-LW
Product Type	Step-down Transformer
Rating (VA)	450
Vin Vout	480/347VAC 240VAC
Frequency	60 Hz
Status	Production

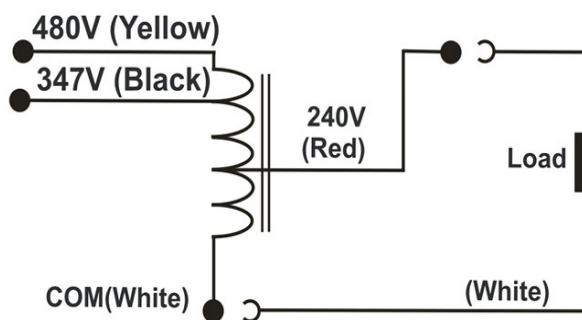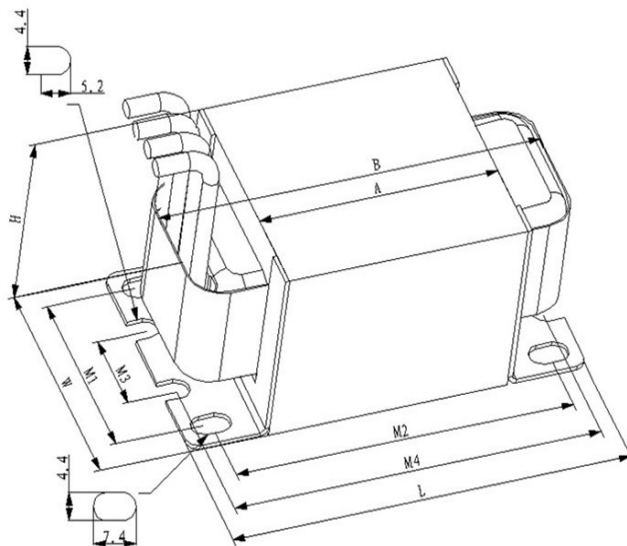

Document No.:	PS_MTM_VA0450_62-24_C_M03
Date:	2017-02-08 (yyyy-mm-dd)