


# FREEMAN

## MODEL: PCS16

### OPERATE THE TOOL

1. Press metal sheets(A) and pull pusher button(B) to pull out the inner magazine.
2. Put the fasteners into the magazine.
3. Press the metal sheets(A) and push back the inner magazine to fix the fasteners.
4. Put the object need to be wired into the nose(C).
5. Hold both tool handles(D) tightly to clinch the fastener.

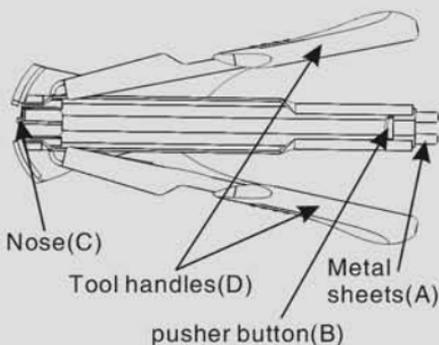

### NOTE:

The tool can be used by both left and right hand.

### GENERAL SAFETY RULES

- **Keep the work area clean and well lighted.** Cluttered benches and dark areas increase the risks of accidents.
- **Stay alert, watch what you are doing and use common sense when operating a tool.** Do not use tool while tired or under the influence of drugs, alcohol, or medication. A moment of inattention while operating the tool may cause serious injury.
- **Use only fasteners that are recommended for your models.** Do not use the wrong fasteners or load the fasteners wrong.

- **Maintain tools with care. Keep tool clean.** A properly maintained tool, reduces the risk of binding and is easier to control.
- **Store tools out of the reach of children and other untrained people.** Tools are dangerous in the hands of untrained users.
- **Check operation of the tool before use.**
- **Do not force tool.** Use the correct tool for your application. The correct tool will do the job better and safer at the rate for which it is designed.
- **Do not use the tool as a hammer.**
- **Never place a hand or any part of body in fastener discharge area of tool.**

### ▲ WARNING:

The warnings and precautions discussed above cannot cover all possible conditions and situations that may occur. It must be understood by the user that common sense and caution are factors which cannot be built into this product, but must be supplied by the user.

### SAVE THIS CARD

Keep this card for the safety warnings and precautions, operating, maintenance. Keep this card and the receipt in a safe and dry place for future reference.

### RECOMMENED FASTENERS

For Best Performance, Always use Freeman Brand 16 GA. C-Rings.