

Specification


Nominal Voltage	6 volts		
Nominal Capacity	77° F (25° C)		
20-hr. (0.16A)	3.20 Ah		
10-hr. (0.30A)	2.98 Ah		
5-hr. (0.54A)	2.72 Ah		
1-hr. (1.92A)	1.92 Ah		
Approximate Weight	1.28 lbs (0.58 kgs)		
Internal Resistance (approx.)	30 mΩ		
Shelf Life (% of normal capacity at 68° F (20° C))			
3 Months	6 Months	12 Months	
91%	83%	64%	
Temperature Dependency of Capacity (20 hour rate)			
104° F	77° F	32° F	5° F
102%	100%	85%	65%
AGM Operational Temperature			
Charge	32°F to 104°F (0°C to 40°C)		
Discharge	5°F to 113°F (-15°C to 45°C)		
AGM Storage Temperature	5°F to 104°F (-15°C to 40°C)		



Due to continuous improvements to our products, product may vary slightly from depiction.


Charge Method (Constant Voltage)	
Cycle Use (Repeating Use)	
Initial Current	.96 A or smaller
Control Voltage	7.3 - 7.4 V
Float Use	
Control Voltage	6.8 - 6.9 V

Physical Dimensions: in (mm)




L: 2.61in (66mm)
W: 1.30in (33mm)
H: 3.82in (97mm)
TH: 4.03in (102mm)
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


Terminals

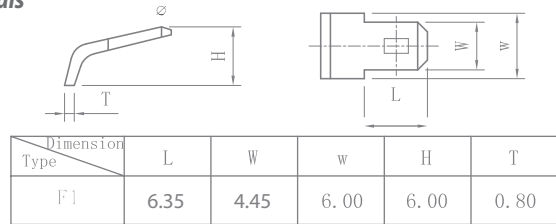

Discharge Time vs. Discharge Current

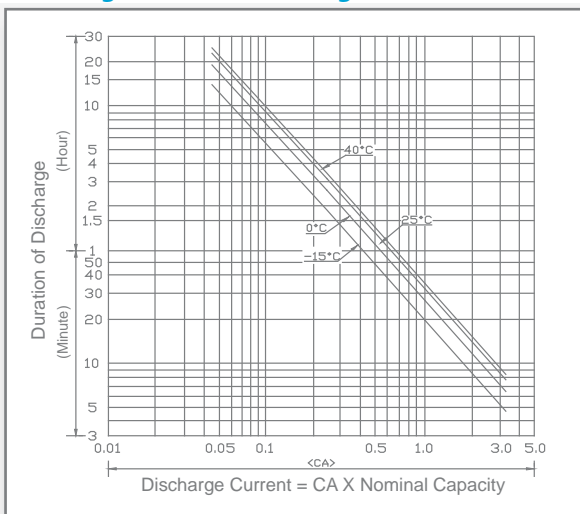


Discharge Characteristics

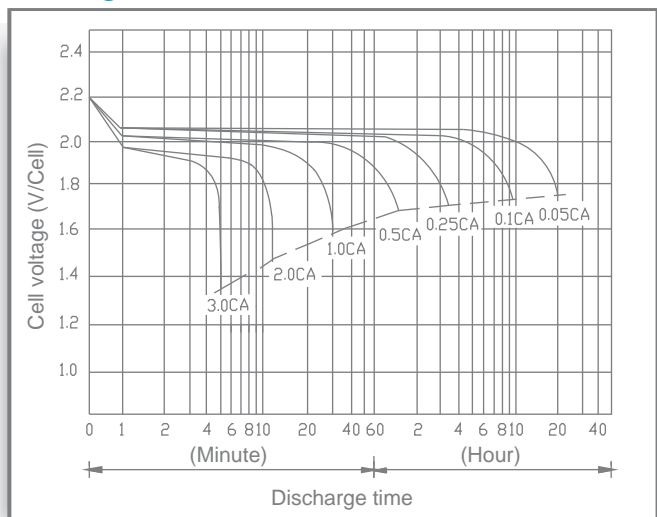


ISO 9001

All specifications are subject to change without notice.


Shelf Life & Storage

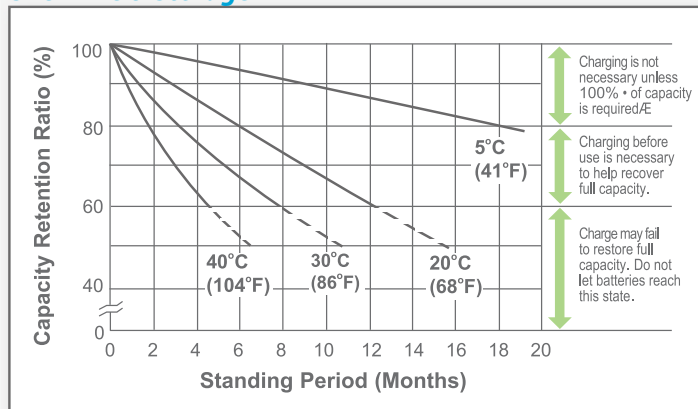


Cycle Life vs Depth of Discharge

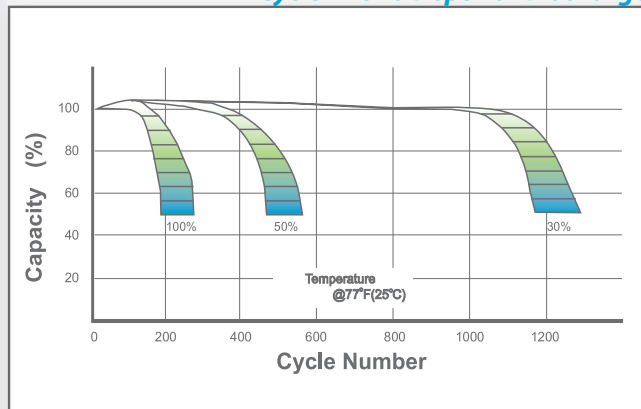

Open Circuit Voltage vs Residual Capacity

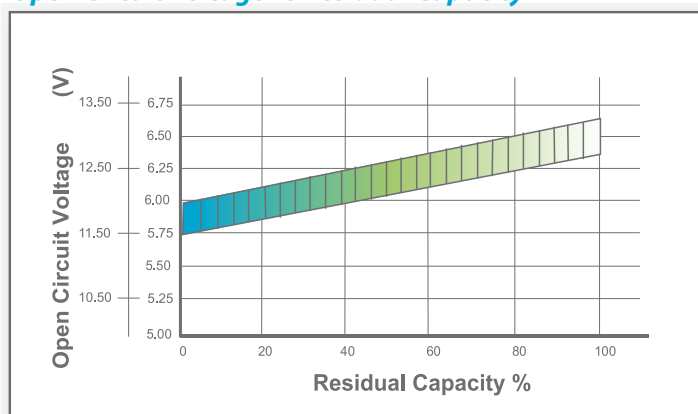

Effect of Temperature on Capacity

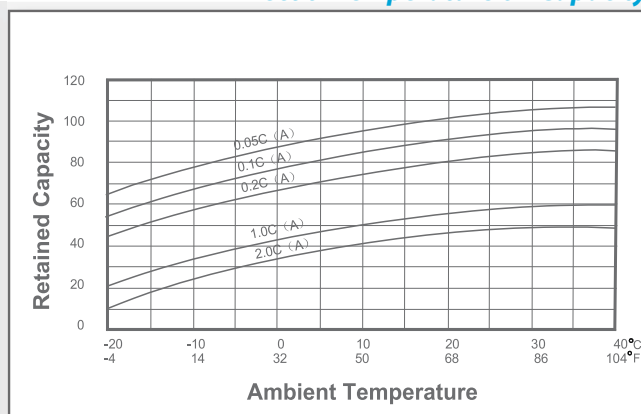

Charge Current & Final Discharge Voltage

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	Discharge Current(A)	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range							
Cycle Use	25 °C (77 °F)	2.45	2.43~2.47	0.30C	1.75	0.2C > (A)	1.70	1.60	1.30	(A) > 1.0C
Standby	25 °C (77 °F)	2.28	2.27~2.30		1.75	0.2C < (A)	1.70	1.60	1.30	(A) < 1.0C