

1734100-7 ✓ ACTIVE

CHAMP | CHAMP .050 Series I


TE Internal #: 1734100-7

PCB Mount Header, Vertical, Board-to-Board, 68 Position, 1.27 mm
[.05 in] Centerline, Fully Shrouded, Gold Flash, CHAMP .050 Series I

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

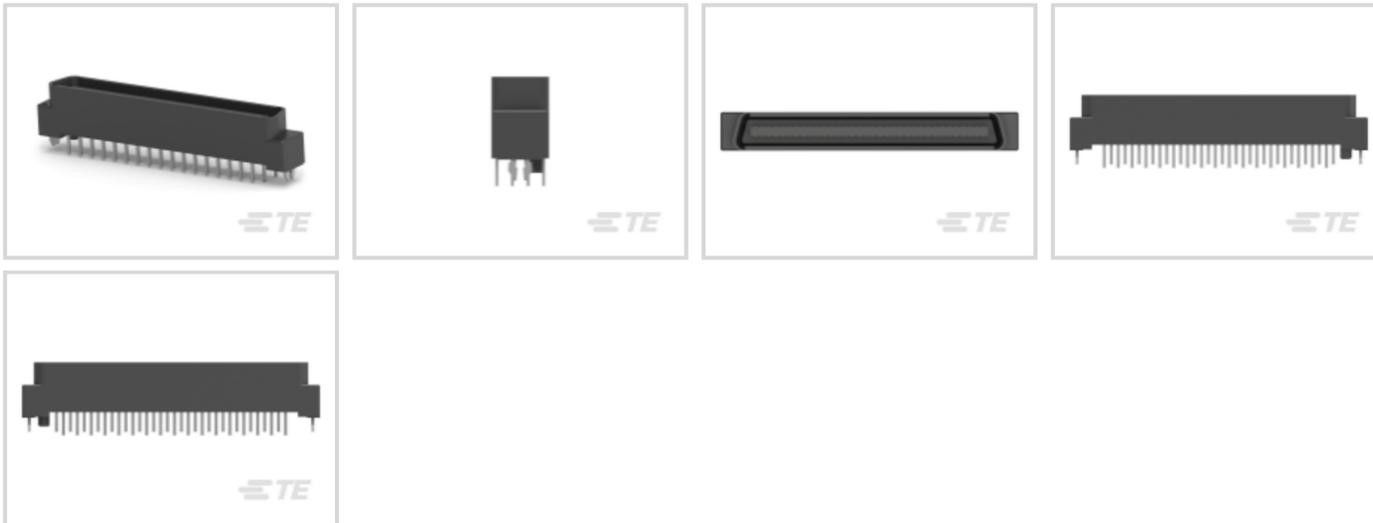

PCB Connector Assembly Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **68**

Centerline (Pitch): **1.27 mm [.05 in]**

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| PCB Connector Assembly Type | PCB Mount Header |
| Connector System | Board-to-Board |
| Header Type | Fully Shrouded |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

| | |
|-----------------------|----------|
| Stackable | No |
| PCB Mount Orientation | Vertical |
| Number of Positions | 68 |

Electrical Characteristics

| | |
|---------------------------------------|---------|
| Dielectric Withstanding Voltage (Max) | 750 VAC |
| Insulation Resistance | 4 MΩ |
| Operating Voltage | 250 VAC |

Body Features



| | |
|--|------------------------|
| PCB Retention Feature Material | Brass |
| PCB Retention Feature Plating Material | Tin-Copper over Nickel |
| Connector Profile | Standard |
| Primary Product Color | Black |

Contact Features

| | |
|---|---|
| Contact Layout | Matrix |
| PCB Contact Termination Area Plating Material Thickness | 3.81 μm [149.9997 μin] |
| Mating Tab Width | .75 mm[.03 in] |
| Mating Tab Thickness | .3 mm[.012 in] |
| PCB Contact Termination Area Plating Material Finish | Matte |
| Contact Shape & Form | Square |
| Contact Mating Area Plating Material Finish | Matte |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Base Material | Phosphor Bronze |
| Contact Mating Area Plating Material | Gold Flash |
| | 30 μin |
| Contact Type | Pin |
| Contact Current Rating (Max) | 1 A |

Termination Features

| | |
|---|-----------------------|
| Rectangular Termination Post & Tail Thickness | .32 mm[.013 in] |
| Rectangular Termination Post & Tail Width | .5 mm[.02 in] |
| Termination Post & Tail Length | 2.54 mm[.1 in] |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

| | |
|--------------------------|--------------------------|
| PCB Mount Alignment Type | Locating Posts |
| PCB Mount Retention Type | Boardlock, Retention Leg |
| Mating Alignment | With |
| Mating Alignment Type | Guide Post |
| PCB Mount Retention | With |
| PCB Mount Alignment | With |
| Connector Mounting Type | Board Mount |

Housing Features

| | |
|--------------------|-----------------|
| Centerline (Pitch) | 1.27 mm[.05 in] |
|--------------------|-----------------|



| | |
|------------------|-------|
| Housing Material | Matte |
|------------------|-------|

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

| | |
|--------------------------|--------|
| Assembly Process Feature | None |
| Circuit Application | Signal |

Industry Standards

| | |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

| | |
|--------------------|---------|
| Packaging Quantity | 54 |
| Packaging Type | Package |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Wave solder capable to 265°C |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | CHAMP .050 Series I

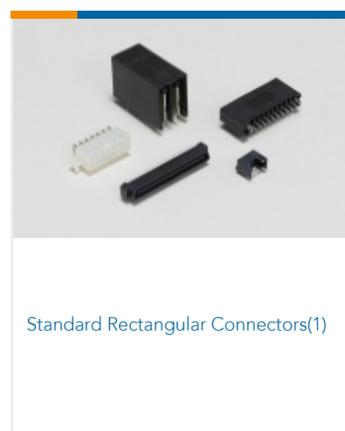

Documents

Product Drawings

[Champ050 series,68pos,Au over PdNi](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1734100-7_E.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1734100-7_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1734100-7_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

[CHAMP .050 High Density Connector](#)

English

1734100-7

PCB Mount Header, Vertical, Board-to-Board, 68 Position, 1.27 mm [.05 in] Centerline,
Fully Shrouded, Gold Flash, CHAMP .050 Series I



Application Specification

English