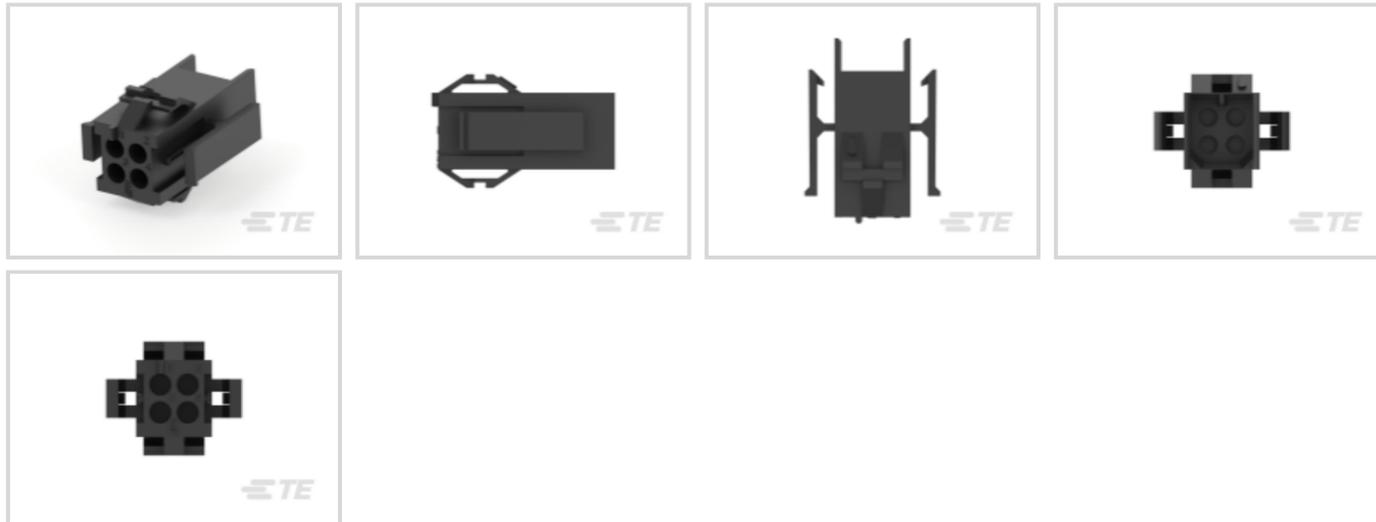# 1-640509-0 ✔ ACTIVE

AMP | **AMP CAP**

TE Internal #: 1-640509-0

Rectangular Power Connectors, Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 4 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, AMP CAP

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Panel, Wire-to-Wire**

Number of Positions: **4**

Centerline (Pitch):   **4.2 mm [.165 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Panel, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	4
Number of Rows	2

Electrical Characteristics

Operating Voltage	250 VDC

Contact Features

Contact Current Rating (Max)	9 A

1-640509-0

Rectangular Power Connectors, Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 4 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, AMP CAP

Contact Retention Within Housing	With
Contact Type	Pin

Termination Features

Termination Method to Wire & Cable	Crimp

Mechanical Attachment

Panel Mount Feature	Without
Connector Mounting Type	Panel Mount
Mating Retention	With
Mating Retention Type	Positive Lock

Housing Features

Centerline (Pitch)	4.2 mm[.165 in]
Housing Color	Black
Housing Material	PA 66

Dimensions

Wire Size	.12 – .8 mm²
Row-to-Row Spacing	4.19 mm[.165 in]
Width	12.95 mm[.675 in]
Accepts Wire Insulation Diameter Range	2.92 mm[.115 in]
Height	7.37 mm[.29 in]
Length	26.92 mm[1.06 in]

Usage Conditions

Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]

Operation/Application

Circuit Application	Power & Signal

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard Number	E28476
Agency/Standard	CSA, UL
UL Rating	Recognized
CSA File Number	LR7189

1-640509-0

Rectangular Power Connectors, Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 4
Position, 4.2 mm [.165 in] Centerline, Wire & Cable, AMP CAP

Packaging Features

Packaging Method	Box
Packaging Quantity	1500

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach
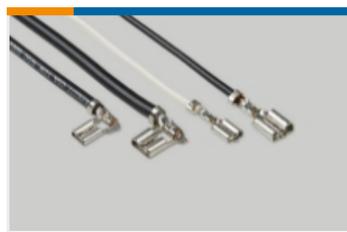
Compatible Parts

TE Part # 1-640519-0
04P MR II PLUG HSG

Also in the Series | AMP CAP

Rectangular Power Connectors, Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 4 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, AMP CAP

PCB Terminals(2)

Quick Disconnects(1)

Rectangular Power Connectors(9)

Documents

Product Drawings

04P MR II CAP HSG V0

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-640509-0_AG.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-640509-0_AG.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-640509-0_AG.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_1-640509-0_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_1-640509-0_F.3d_igs.zip

English

Customer View Model

ENG_CVM_1-640509-0_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

1-640509-0

Rectangular Power Connectors, Housing, Receptacle, Wire-to-Wire / Wire-to-Panel, 4
Position, 4.2 mm [.165 in] Centerline, Wire & Cable, AMP CAP

English

Product Environmental Compliance

MD_1-640509-0_06252013102_dmtec

English

MD_1-640509-0_06252013102_dmtec

English

Instruction Sheets

Instruction Sheet (U.S.)

English

AMP* MINIATURE RECTANGULAR II (MRII) CONNECTORS

English

Agency Approvals

Agency Approval Document

English