




Relays, Contactors & Switches > Relays > Mil-Aero Relays > Mid-Range Relays

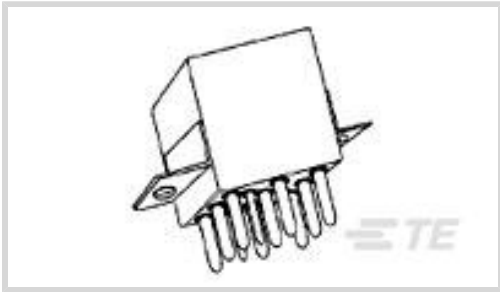

Mid-Range Relay Contact Arrangement: **3 Form C, 3PDT, 3 C/O**

Coil Suppression Diode: **With**

Auxiliary Contacts: **Without**

Terminal Plating: **Tin-Lead**

Mid-Range Relay Contact Current Rating: **25 A**

Features

Product Type Features

Enclosure Type	Hermetically Sealed
Terminal Configuration	Solder Pins
Product Type	Relay
Relay Type	Military/Aerospace Mid-Range

Electrical Characteristics

Vibration	30G's, 33 – 3000Hz
Shock	200G's, 6ms
Coil Suppression Diode	With
Mid-Range Relay Coil Voltage Rating	28 VDC
Mid-Range Relay Coil Resistance	290 Ω
Back EMF Suppression	With
Coil Magnetic System	Polarized, Monostable
Actuating System	DC

Contact Features

Mid-Range Relay Contact Arrangement	3 Form C, 3PDT, 3 C/O
Auxiliary Contacts	Without
Terminal Plating	Tin-Lead
Mid-Range Relay Contact Current Rating	25 A



Contact Base Material	Silver Cadmium Oxide
-----------------------	----------------------

Mechanical Attachment

Mid-Range Relay Mounting Type	No Brackets
-------------------------------	-------------

Usage Conditions

Operating Temperature Range	-70 – 125 °C
-----------------------------	--------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not lead free process capable

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


FCA-325-BZ4

Mid-Range Relays, 3 Form C, 3PDT, 3 C/O, Coil Suppression Diode, Tin-Lead
Terminal Plating, 25 A, 28 VDC Coil Voltage, CII FCA-325 Series






TE Part # 2-1617748-5
FCA-125-19=M6106/19-019



TE Part # 2-1617748-0
FCA-125-14=M6106/19-014




TE Part # 6-1617748-1
FCA-125-AY4




TE Part # 1-1617748-6
FCA-125-10=M6106/19-010


TE Part # 5-1617791-1
FCA-125-3702L=M83536/37-002L




TE Part # 7-1617748-5
FCA-125-CX4

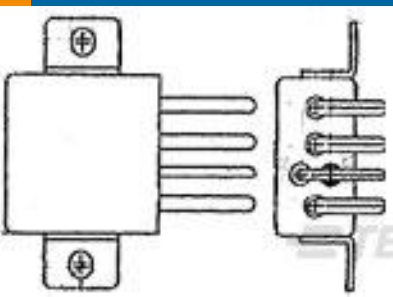


TE Part # 1617790-5
FCA-125-HX4=RELAY

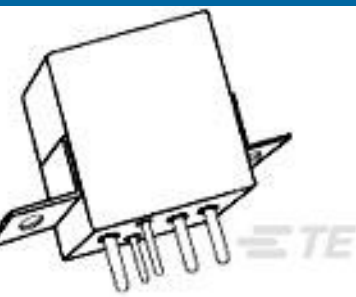


TE Part # 4-1617748-6
FCA-125-5=M6106/19-005



TE Part # 5-1617791-2
FCA-125-3703L=M83536/37-003L

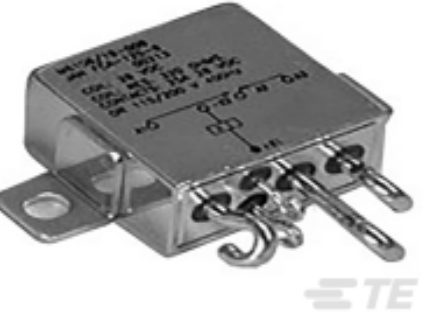

TE Part # 4-1617791-6
FCA-125-3605L=M83536/36-005L



TE Part # 5-1617748-4
FCA-125-7=M6106/19-007



TE Part # 9-1617798-1
FCA-125-BZ2=25 AMP SPDT RELAY



TE Part # 6-1617748-8
FCA-125-BZ1



TE Part # 8-1617748-3
FCA-125-CY9

Also in the Series | CII FCA-325 Series



Mid-Range Relays(26)

Documents



Product Drawings

FCA-325-BZ4

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-1617753-0_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-1617753-0_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-1617753-0_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

5-1773450-5_sec5_FCA-325

English