

776524-2 ✓ ACTIVE

AMP | AMPSEAL 16

TE Internal #: 776524-2

Housing for Female Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Gray, Cable Mount (Free-Hanging),

AMPSEAL 16

[View on TE.com >](#)



Connectors > Automotive Connectors > Connector Housings > AMPSEAL 16 Housings



Connector & Housing Type: **Housing for Female Terminals**

Mating Pin Diameter: **1.5 mm [.059 in]**

Connector System: **Wire-to-Wire**

Number of Positions: **4**

Centerline (Pitch): **5.3 mm [.209 in]**

[All AMPSEAL 16 Housings \(226\)](#)

Features

Product Type Features

| | |
|--------------------------|------------------------------|
| Connector Shape | Rectangular |
| Connector & Housing Type | Housing for Female Terminals |
| Connector System | Wire-to-Wire |
| Sealable | Yes |
| Hybrid Connector | No |
| Primary Locking Feature | Integrated in Housing |

Configuration Features

| | |
|---------------------|---|
| Number of Positions | 4 |
| Number of Rows | 2 |

Electrical Characteristics

| | |
|------------------------------|--|
| Operating Voltage | 250 VDC |
| Nominal Voltage Architecture | 12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V, 240 V |

Body Features

| | |
|------------------|--------|
| Cable Exit Angle | 180° |
| Body Material | PBT GF |



| | |
|-----------------------|------|
| Primary Product Color | Gray |
|-----------------------|------|

| | |
|----------------|---|
| Connector Code | 2 |
|----------------|---|

Contact Features

| | |
|--------------|---------|
| Contact Size | Size 16 |
|--------------|---------|

| | |
|--------------|--------|
| Contact Type | Socket |
|--------------|--------|

| | |
|---------------------|-----------------|
| Mating Pin Diameter | 1.5 mm[.059 in] |
|---------------------|-----------------|

| | |
|------------------------------|------|
| Contact Current Rating (Max) | 13 A |
|------------------------------|------|

Mechanical Attachment

| | |
|------------------|---------|
| Mounting Feature | Without |
|------------------|---------|

| | |
|-----------------------------|-----|
| Terminal Position Assurance | Yes |
|-----------------------------|-----|

| | |
|---------------|------------------|
| Strain Relief | Add By Accessory |
|---------------|------------------|

| | |
|-----------------------|-------|
| Mating Alignment Type | Keyed |
|-----------------------|-------|

| | |
|------------------|------|
| Mating Alignment | With |
|------------------|------|

| | |
|-------------------------|----------------------------|
| Connector Mounting Type | Cable Mount (Free-Hanging) |
|-------------------------|----------------------------|

Housing Features

| | |
|--------------------|-----------------|
| Centerline (Pitch) | 5.3 mm[.209 in] |
|--------------------|-----------------|

Dimensions

| | |
|---------------|-------------------|
| Product Width | 36.7 mm[1.445 in] |
|---------------|-------------------|

| | |
|----------------|-------------------|
| Product Length | 25.33 mm[.997 in] |
|----------------|-------------------|

| | |
|----------------|-------------------|
| Product Height | 26.8 mm[1.055 in] |
|----------------|-------------------|

| | |
|--------------------|-----------------|
| Row-to-Row Spacing | 4.5 mm[.177 in] |
|--------------------|-----------------|

Usage Conditions

| | |
|-----------------------------|---|
| Operating Temperature (Max) | 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F] |
|-----------------------------|---|

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -40 – 125 °C[-40 – 257 °F] |
|-----------------------------|----------------------------|

Industry Standards

| | |
|----------------------|------|
| Degree of Protection | IP67 |
|----------------------|------|

| | |
|------------------------|---------|
| UL Flammability Rating | UL 94HB |
|------------------------|---------|

Packaging Features

| | |
|--------------------|----|
| Packaging Quantity | 22 |
|--------------------|----|

| | |
|------------------|---------|
| Packaging Method | Package |
|------------------|---------|

Other

| | |
|--------------------------------------|-----|
| Serviceable | Yes |
| Connector Position Assurance Capable | Yes |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer







This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts





Also in the Series | AMPSEAL 16

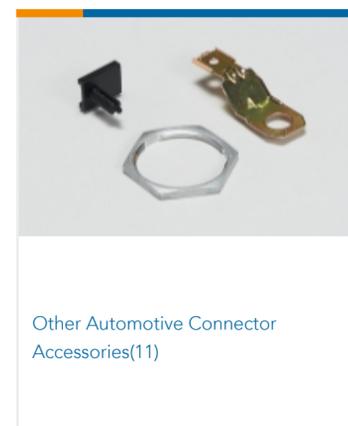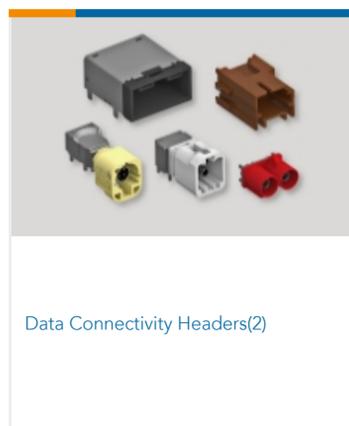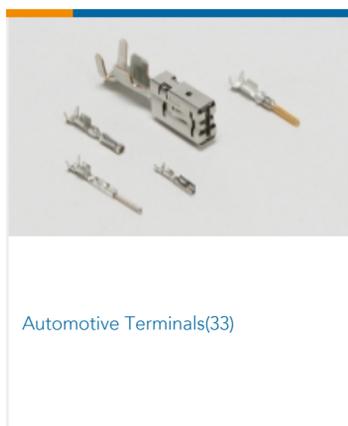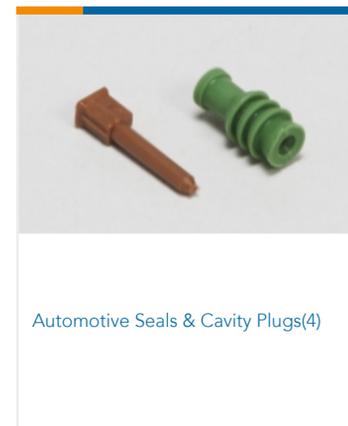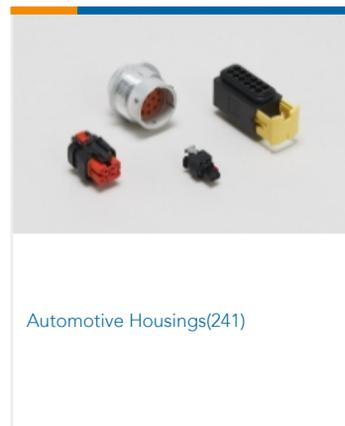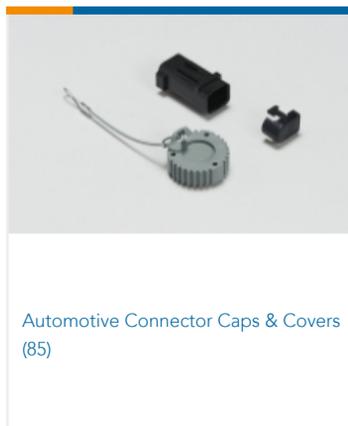

Documents

Product Drawings

AS 16, 4P PLUG ASSY, RD, KEY 2

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_776524-2_E_c-776524-2-e.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_776524-2_E_c-776524-2-e.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_776524-2_E_c-776524-2-e.3d_stp.zip](#)

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English