

GRIPPS®

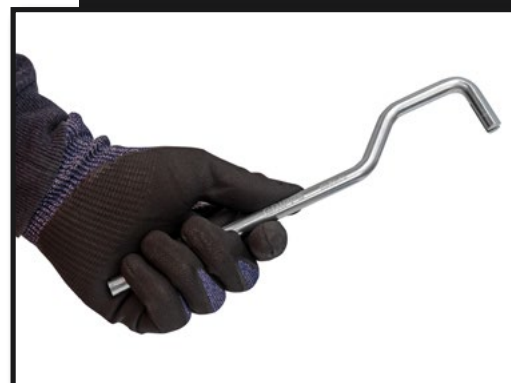
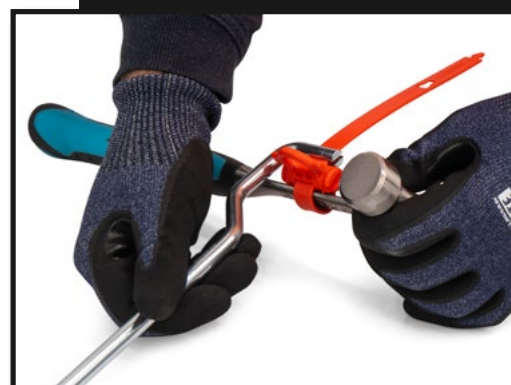
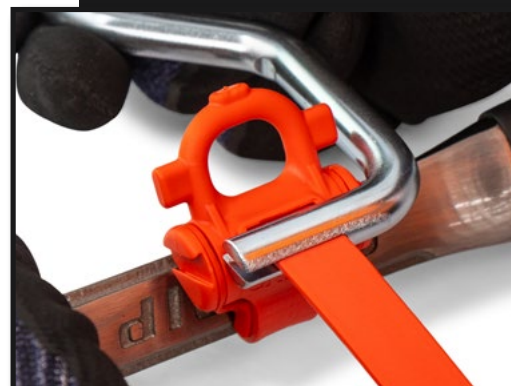
H09020 GRIPPTIE TOOL

GRIPPS® GrippTie Tool is a custom-engineered accessory designed to streamline the application and tightening of GrippTies.

A substitute for generic pliers, it delivers controlled torque, comfortable ergonomics, and repeatable results reducing install time. Constructed from zinc-plated steel for durability and corrosion resistance, it withstands harsh site conditions. The GrippTie Tool enables users to efficiently and reliably secure GrippTies to tools or equipment.

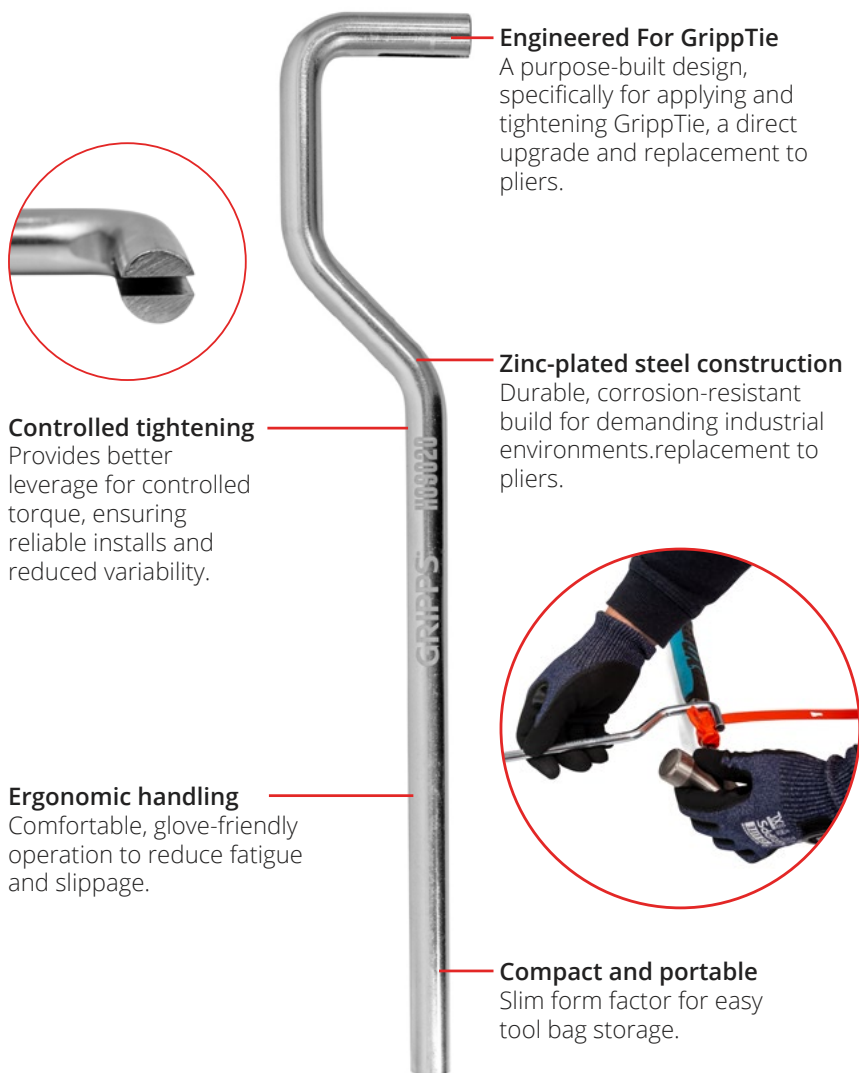


ENGINEERED FOR DROP PREVENTION



gripps.com

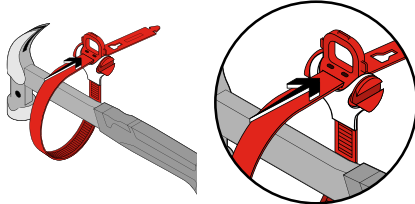
KEY FEATURES

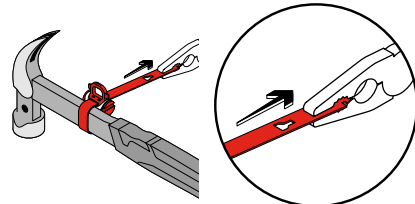


SPECIFICATIONS

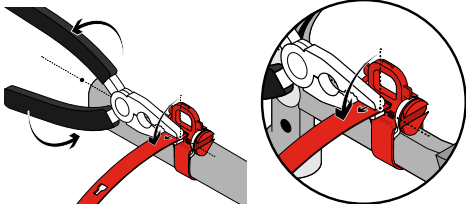
SKU	WEIGHT	LENGTH	WIDTH	HEIGHT
H09020	0.18 kg 0.4 lb	255 mm 10 in	45 mm 1.77 in	10 mm 0.39 in

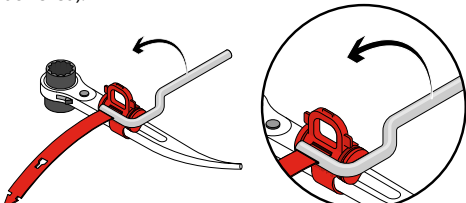
1 The GrippTie is suitable for tools:
1) Up to 2kg (4.4lb) and with a 1.3m (51") tether length. 2) For tools with a diameter between 10mm (0.4") and 40mm (1.6"). Ensure the tool is clean and dry before applying the GrippTie.

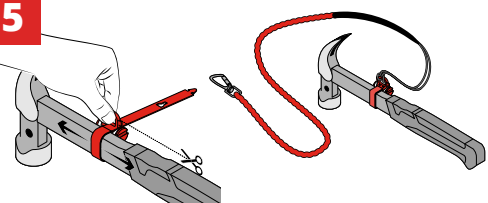
2 
Wrap the GrippTie around the tool, the logo and text should be visible on the outside. Feed the strap through and pull the tag end until the GrippTie is firmly in contact with the tool, this will require a pair of pliers.

3 
Pull the tag end with a pair of pliers until the GrippTie is firmly in contact with the tool.

4 Use one of the following methods to secure the GrippTie to your tool:

Pliers:

Position the pliers sideways and grip the GrippTie strap as close as possible to your tool. With one hand stabilising the tool and GrippTie, pull firmly on the strap while leveraging the pliers to secure the GrippTie tightly to your tool (generally an additional 1-2 notches can be achieved).

GrippTie Tool:

Position the slot of the GrippTie Tool over the GrippTie strap, as close as possible to your tool. With one hand stabilising the tool and GrippTie, rotate the GrippTie Tool toward yourself to secure the GrippTie tightly to your tool (generally an additional 1-2 notches can be achieved).

5 
Check that the GrippTie is sufficiently tightened. Pull by hand in each direction. It should not move. Then snip off the tag end. Take care not to make any sharp edges. Connect a suitable GRIPPS® tether to the D-Ring of the GrippTie and secure the tether to an appropriate anchor point.
*For use with GRIPPS® tethers up to 51in / 1.3m.