
Overview
Steel City® metallic boxes and covers

Steel City® is the industry-leading product line of metallic switch and outlet boxes used in electrical construction. Since 1904, Steel City® products have symbolized the highest quality standards in manufacturing and innovative design, with one of the most complete offerings available.

Steel City® products are known for their simple improvements, such as being the first box offering to standardize combination slotted/ phillips screws on all boxes. Steel City® is also recognized as a leader in design innovation, as in our new metal stud bracket.

Steel City® continues to listen to contractors and responds to their ever-changing needs. Contact a Steel City® distributor nearest you to select the right product for your requirements.

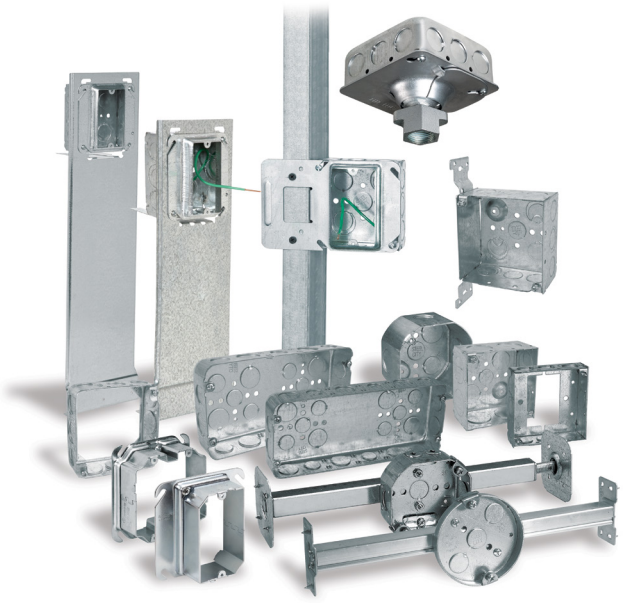

01 **Notched ears on switch boxes**
Steel City® switch boxes feature a longer ear and a special notch. This provides clearance for the screws that are used to attach wall plates to GFCI or rocker-type light switches.

02 **MS Bracket boxes**
Mounts without the use of screws. Mounts to the open or closed side of the stud. Works on stud depths up to 4".

03 **Eccentric knockouts on square boxes**
Provide better contact with conduit fitting and locknut to the box, improve grounding path, stronger than 3/4" knockout. Available in all four standard-size square boxes. Improved 3/4" knockout position on square boxes.Less labor required to install 3/4" conduit to box. Square boxes also come with concentric Knockouts.


04 **Raised ground screw bump in 4" square, 4$^{11}/_{16}$" and utility boxes**
Quicker surface mounting by eliminating the need to remove the portion of the screw that threads through the back of the box. Allows for improved repositioning of grounding conductor. Ground bump standard in 2$^{1}/_{8}$" boxes. Ground bump standard in 1$^{1}/_{2}$" boxes.

05 **Pre-installed screws are packaged in raised position**
Eliminates extra step of having to back out the screw during cover installation.

Advantages of Steel City® boxes and covers



01

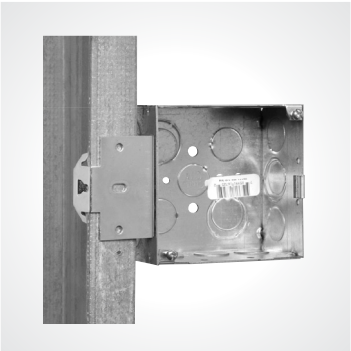


02



03



04

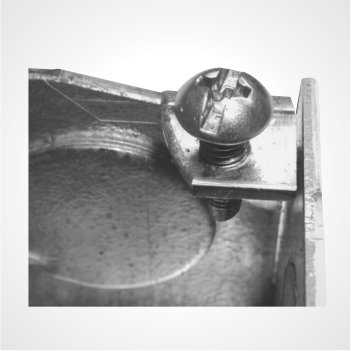


05


Steel City® switch and outlet boxes are protected from rust and corrosion by zinc-galvanizing. All clamps and other component parts are electrogalvanized separately, before assembly in the box, to ensure corrosion protection of every surface. Steel City® galvanized finish meets the requirements of Underwriters Laboratories, Inc. and Federal Specifications.

Square boxes and accessories

4 11/16" Square boxes




72171 MS 1/2 & 3/4
MS bracket for 1⅝", 2½", 3⅝", 4" metal studs




72151-1/2 & 3/4-E




72171-1/2 & 3/4-E




72171 1



72171 3/4 1



72171 1 1/4




72171CV 1/2 & 3/4

4 11/16" Square boxes




Cat. No.	Depth (in.)	Capacity (cu. in.)	Each side Conduit (in.)	Each end Conduit (in.)	Bottom Conduit (in.)	Std. Ctn.
With conduit KOs						
72151-1/2 & 3/4-E*	1 1/2	29.5	3-1/2, 3/4-33/64	2-1/2, 3/4-33/64	2-1/2, 3/4-E, 4-1/2	20
72171-1/2 & 3/4-E*	2 1/8	42.0	3-1/2 & 3/4-E	3-1/2 & 3/4-E	2-1/2, 3/4-E, 3-1/2	20
72171 1	2 1/8	42.0	*2-1	2-1	3-1/2, 2-3/4	20
72171 3/4 1*	2 1/8	42.0	1-3/4, 1-1	1-3/4, 1-1	3-1/2, 3-3/4, 2-1	20
72171 1 1/4*	2 1/8	42.0	2-1 1/4	1-1 1/4	3-1/2, 2-3/4	20
72171CV 1/2 3/4*	2 1/8	42.0	2-1/2, 1 3/4	2-1/2, 1 3/4	3-1/2, 2-3/4	25
72151 MS 1/2 3/4*	2 1/8	42.0	3-1/2, 3/4-33/64	3-1/2, 3/4-33/64	2-1/2, 3/4-33/64, 3-1/2	20
72151 MS 1/2 3/4	2 1/8	42.0	3-1/2, 3/4-33/64	2-1/2, 3/4-33/64	2-1/2, 2-3/4-33/64, 4-1/2	25
72171 MS 1/2 3/4*	2 1/8	42.0	3-1/2, 3/4-33/64	3-1/2, 3/4-33/64	2-1/2, 3/4-33/64, 3-1/2	25
72151MSX	2 1/8	42.0	3-1/2, 3/4-33/64	2-1/2, 3/4-33/64	2-1/2, 2-3/4-33/64, 4-1/2	25
72151MSXP	2 1/8	42.0	3-1/2, 3/4-33/64	2-1/2, 3/4-33/64	2-1/2, 2-3/4-33/64, 4-1/2	25
72151MSP	2 1/8	42.0	3-1/2, 3/4-33/64	3-1/2, 3/4-33/64	3-1/2, 2-1/2, 3/4-33/64	25
72171MSX	2 1/8	42.0	3-1/2, 3/4-33/64	3-1/2, 3/4-33/64	3-1/2, 2-1/2, 3/4-33/64	25
72171MSXP	2 1/8	42.0	3-1/2, 3/4-33/64	3-1/2, 3/4-33/64	3-1/2, 2-1/2, 3/4-33/64	25

Per UL 514-A, suitable for use without a bonding jumper in circuits above or below 250 volts.

4 11/16" Square boxes

	Cat. No.	Depth (in.)	Capacity (cu. in.)	Description	Construction Type	Std. Ctn.
	5-SDW-FB-1	2 1/8	42.0	Two 1" KOs in each of three sides, flat bracket on other side and three 1/2" KOs in a line in bottom with two 3/4" KOs at opposite ends in bottom.	Welded	25

4 11/16" Square box extension rings

			Cat. No.	Depth (in.)	Capacity (cu. in.)	Knockouts (in.) Each side Conduit	Knockouts (in.) Each end Conduit	Std. Ctn.
			With conduit KOs					
			73151 1/2 3/4*	1 1/2	29.5	2-1/2, 1 1/4	2-1/2, 1 1/4	20
			73171 1/2 3/4*	2 1/8	42.0	2-1/2, 1 1/4	2-1/2, 1 1/4	20
			73171 1	2 1/8	42.0	2-1	2-1	20

73151 1/2 & 3/4 **73171 1/2 & 3/4** **73171 1**