ABB BALDOR RELIANCE

Customer information packet

L3507M

.75HP, 1725RPM, 1PH, 60HZ, 56, 3428LC, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 5:19:50 PM

Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.750 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	115.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	8.200 A @ 115.0 V
	5.400 A @ 208.0 V
	4.100 A @ 230.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.1 a

Part Detail

Revision	AB
Type	AC
Mech. spec.	34G426
Base	
Status	PRD/A
Elec. spec.	34WGW982
Layout	34LYG426
Eff. date	10-25-2024
CD Diagram	CD0320
Poles	04
Leads	6#18,1#16 #4TH
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3428LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.47 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Manual Thermal Overload
Winding Thermal 1 Location	SB

Winding Thermal 2	None

Nameplate

NP1257L											
CAT.NO.	L3507M										
SPEC.	34G426W982										
HP	.75										
VOLTS	115/230										
AMP	8.2/4.1										
RPM	1725										
FRAME	56		**HZ**	60		**PH**	1				
SER.F.	1.25	**CODE**	L	**DES**	N	**CL**	B				
NEMA-NOM-EFF	74	**PF**	80								
RATING	40C AMB-CONT										
CC											
DE	6203	**ODE**	6203								
ENCL	TEFC	**SN**									
	SFA 9.8/4.9										

Accessories

Part number	Description	Multiplier
34-171	C FACE KIT	A8

AC Induction Motor Performance Data
Record # 7171
Typical performance - not guaranteed values

Winding: 34WGW982-R001	**Type:** 3428LC	**Enclosure:** TEFC

Nameplate Data				**230 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			.75	**Full Load Torque**	2.27 LB-FT
Volts			115/230	**Start Configuration**	direct on line
Full Load Amps			8.2/4.1	**Breakdown Torque**	5.5 LB-FT
R.P.M.			1725	**Pull-up Torque**	4.25 LB-FT
Hz	60	**Phase**	1	**Locked-rotor Torque**	8.62 LB-FT
NEMA Design Code	N	**KVA Code**	L	**Starting Current**	32.2 A
Service Factor (S.F.)			1.25	**No-load Current**	2.87 A
NEMA Nom. Eff.	74	**Power Factor**	80	**Line-line Res. @ 25ºC**	3.08 Ω A Ph 1.75 Ω B Ph
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	62°C
S.F. Amps			9.8/4.9	**Temp. Rise @ S.F. Load**	80°C

Load Characteristics 230 V, 60 Hz, 0.75 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	40	59	70	78	83	86	83
Efficiency	50.3	67	71.8	73.6	72.9	71	72.9
Speed	1785	1770	1757	1740	1721	1698	1721
Line amperes	2.92	3.16	3.64	4.2	4.97	5.84	4.97


ABB Motors and Mechanical Inc.

WINDING # 34WGW982

0.75 HP 1 PH 60 HZ 1725 RPM 230 V 3428LC


Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=5.5 PU=4.25 LR=8.62 LRA=32.2

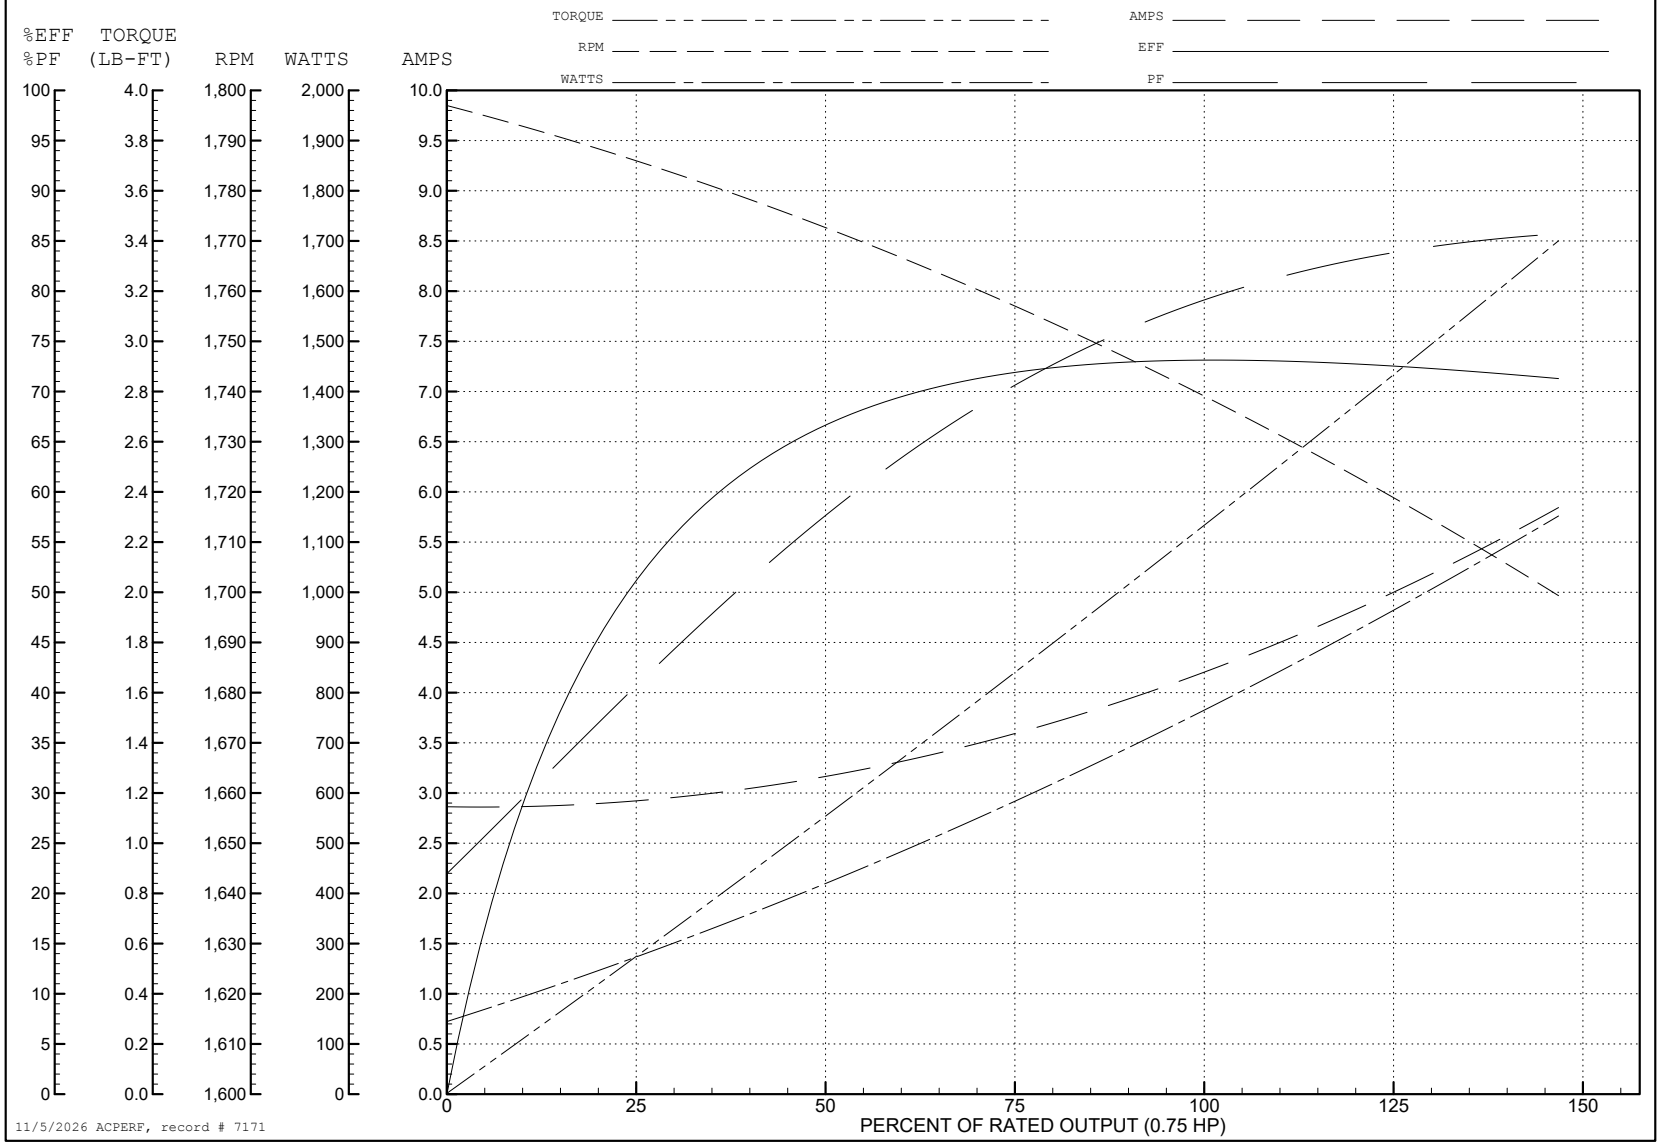

11/5/2026 ACPERF, record # 7171

34LYG426

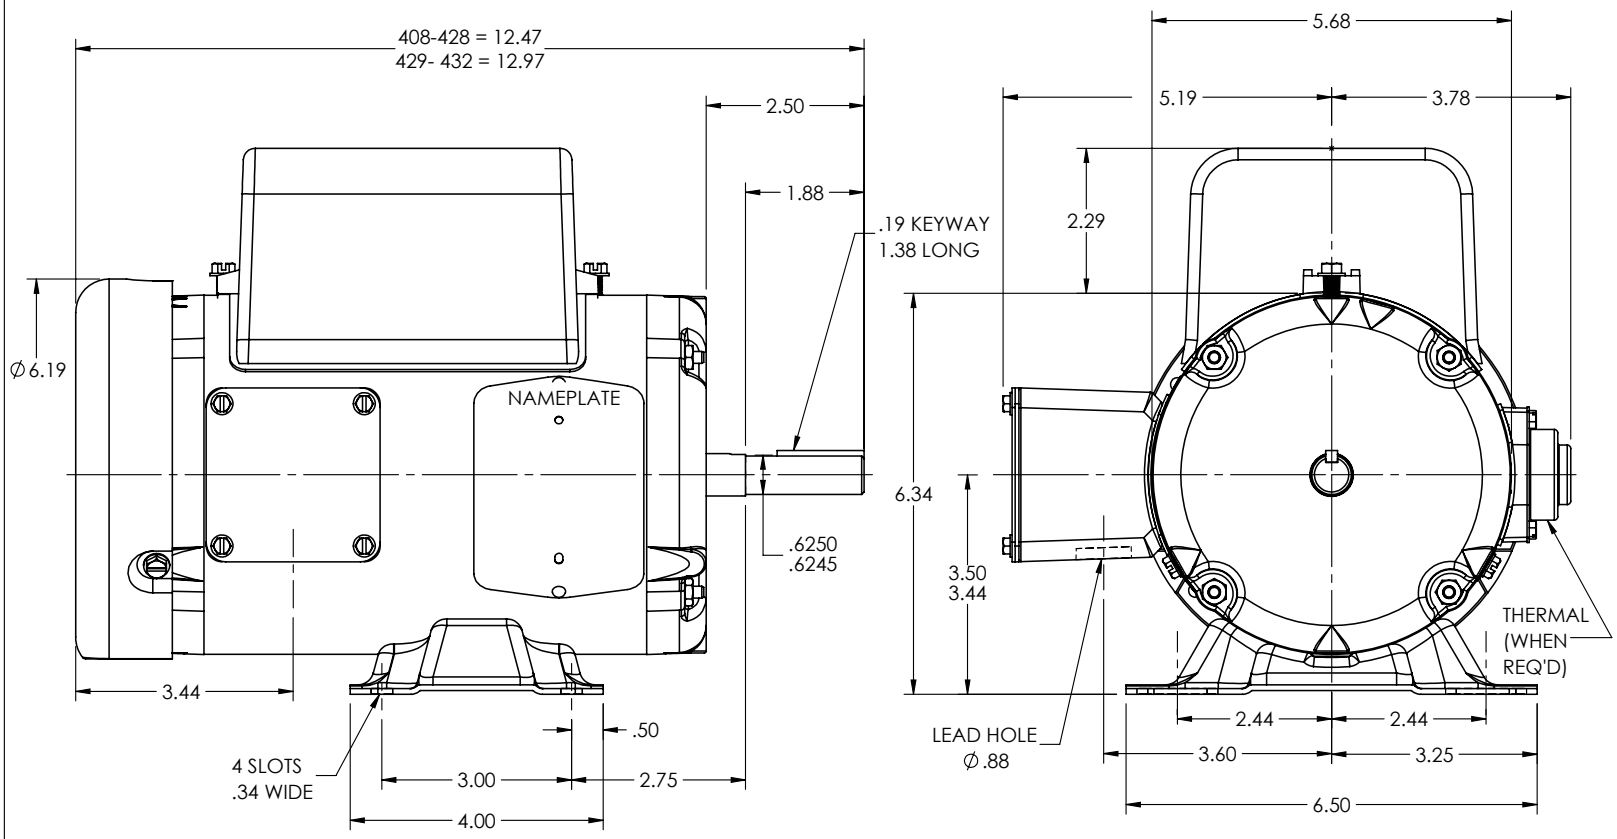

34LYG426


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: LOAD TO SOLIDWORKS			
REV: C	VERSION: 02	REVISED: 04:08:09 08/09/2022	TDR: 000001194274
34LYG426	MODEL NO. 34LYG426		REF: -
	BY: ENFRAJ0		

BALDOR - RELIANCE®

SPL HORZ 34LC NEMA 56 TEFC

CD0320

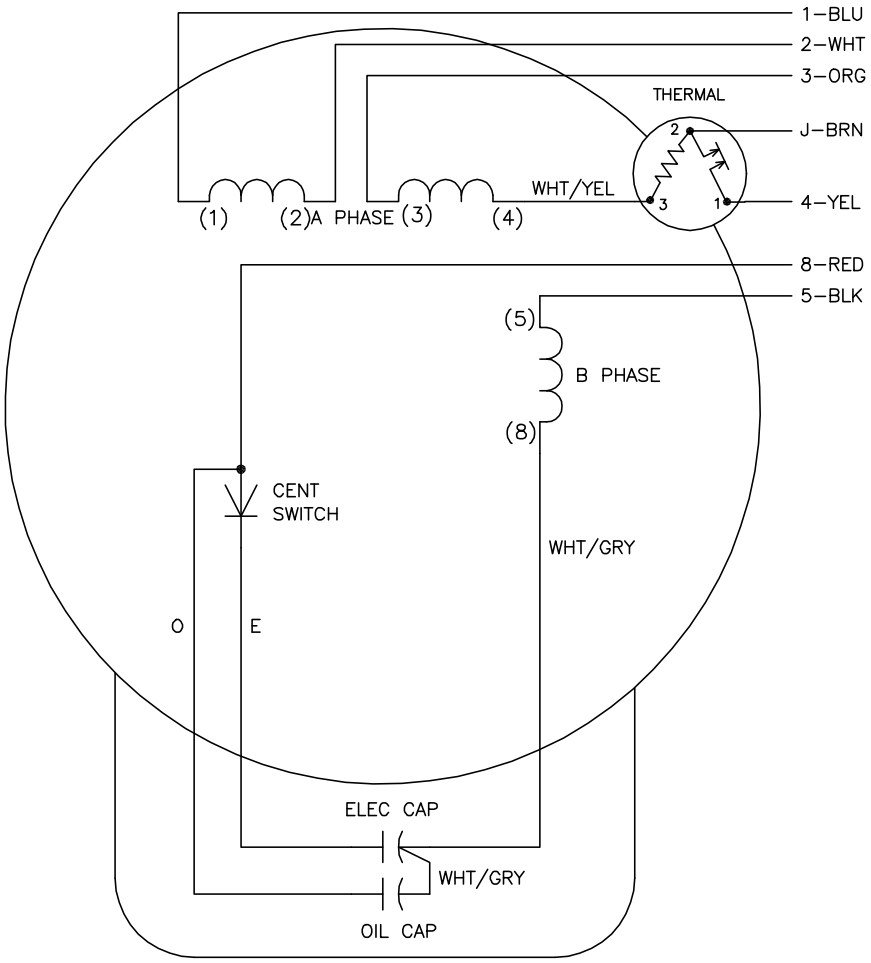

	LINE A	LINE B	JOIN	JOIN
HIGH STD	1,8	4	2,3,5	J
HIGH OPP	1,5	4	2,3,8	J
LOW STD	1,3,8	4	–	2,J,5
LOW OPP	1,3,5	4	–	2,J,8

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0320

REV. DESC: ADD INTERNAL CONNECTION TO HELP MANUFACTURING		
REV. LTR: G	VERSION: 01	TDR: 000000941594
FILE: \AAA\00007\422	REVISED: 02:21:00 08/28/2015	BY: ENALEMO
MTL: –		

BALDOR

TYPE LC, DV, REV, THERMAL, B PH AMPS THRU HTR HVC, 7 LEAD

SH 1 of 1