ABB BALDOR RELIANCE

Customer information packet

M3153T

.75HP, 1140RPM, 3PH, 60HZ, 143T, 3428M, OPEN
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 12:53:11 PM

Specifications

Enclosure	OPEN
Frame	143T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.750 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.500 A @ 460.0 V
	3.000 A @ 230.0 V
	3.300 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	77.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.5 a

Part Detail

Revision	U
Type	AC
Mech. spec.	34-3482
Base	
Status	PRD/A
Elec. spec.	34WGW012
Layout	34LY3482
Eff. date	11-06-2024
CD Diagram	CD0005
Poles	06
Leads	9#18
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3428M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	12.32 IN
Power Factor	59
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1140 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M3153T								
SPEC.	34-3482W12								
HP	.75								
VOLTS	230/460								
AMP	3/1.5								
RPM	1140								
FRAME	143T	**HZ**	60			**PH**	3		
SER.F.	1.15	**CODE**	K	**DES**	B	**CLASS**	B		
NEMA-NOM-EFF	77	**PF**	59						
RATING	40C AMB-CONT								
CC									
DE	6205	**ODE**	6203						
ENCL	OPEN	**SN**							

Accessories

Part number	Description	Multiplier
34-3903A	C FACE KIT	A8

AC Induction Motor Performance Data
Record # 57255
Typical performance - not guaranteed values

Winding: 34WGW012-R038	**Type:** 3428M	**Enclosure:** OPEN

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			.75	**Full Load Torque**	3.4 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			3-1.5	**Breakdown Torque**	11.8 LB-FT
R.P.M.			1140	**Pull-up Torque**	9.3 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	9.7 LB-FT
NEMA Design Code	B	**KVA Code**	K	**Starting Current**	7.4 A
Service Factor (S.F.)			1.15	**No-load Current**	1.1 A
NEMA Nom. Eff.	77	**Power Factor**	59	**Line-line Res. @ 25ºC**	21.9 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	
				Locked-rotor Power Factor	55.5

Load Characteristics 460 V, 60 Hz, 0.75 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	26	40	51	59	65	68	63
Efficiency	60	72	76	77	75	73	76
Speed	1185	1170	1155	1135	1115	1095	1125
Line amperes	1.1	1.2	1.4	1.5	1.7	2	1.6


ABB Motors and Mechanical Inc.

WINDING # 34WGW012


0.75 HP 3 PH 60 HZ 1140 RPM 460 V 3428M


Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=11.8 PU=9.3 LR=9.7 LRA=7.4

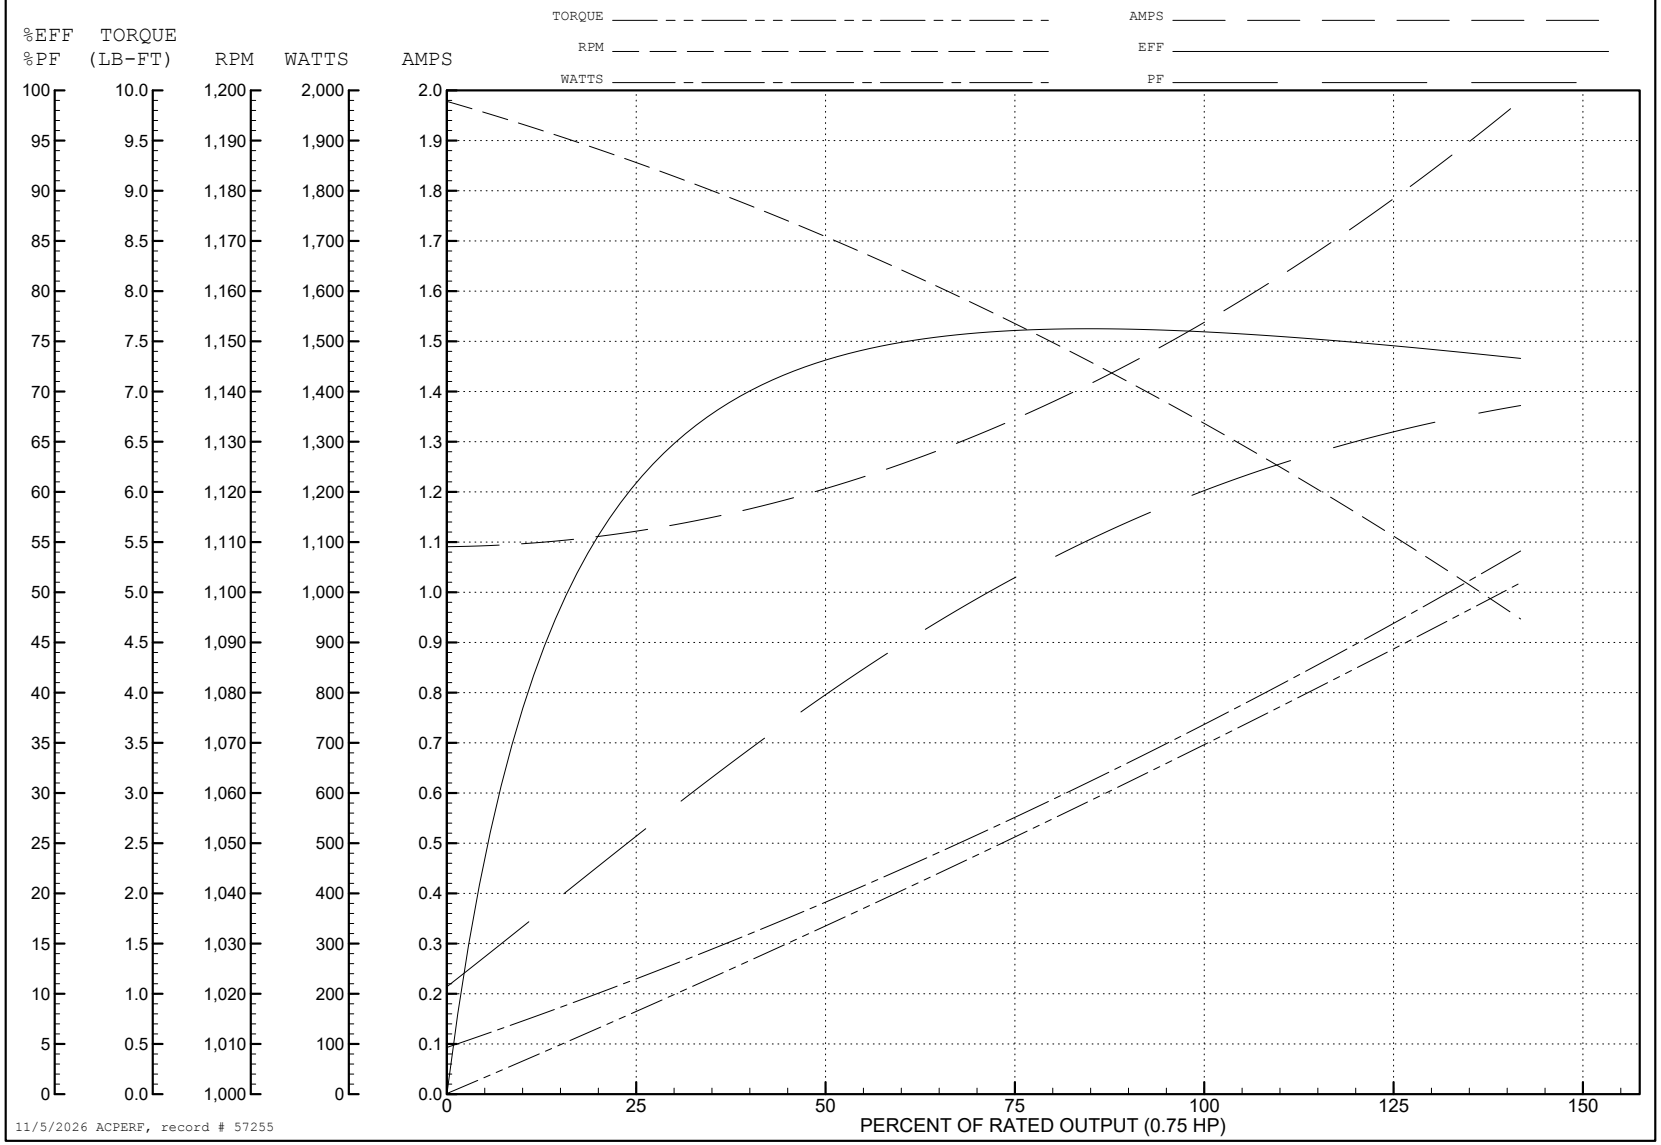

34LY3482

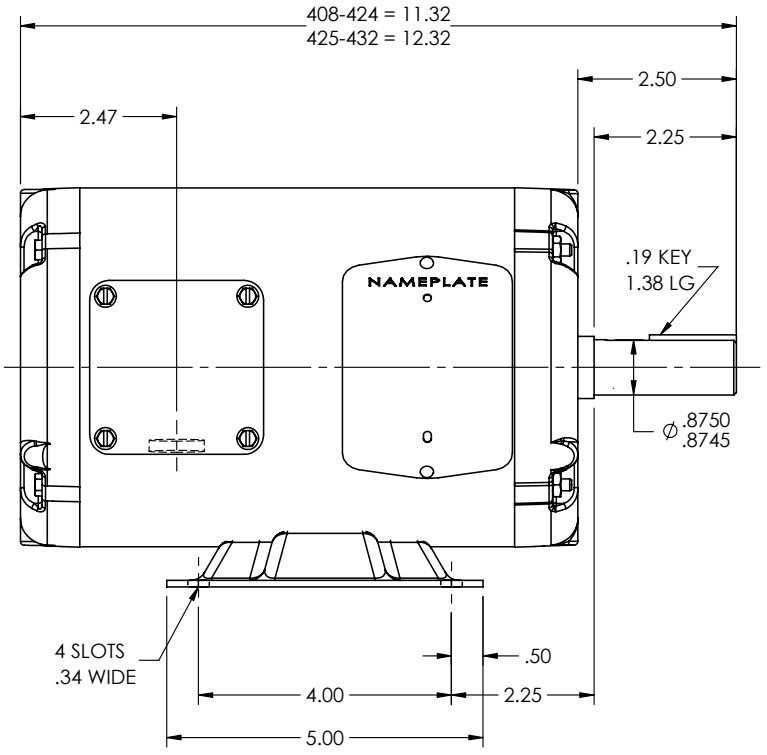

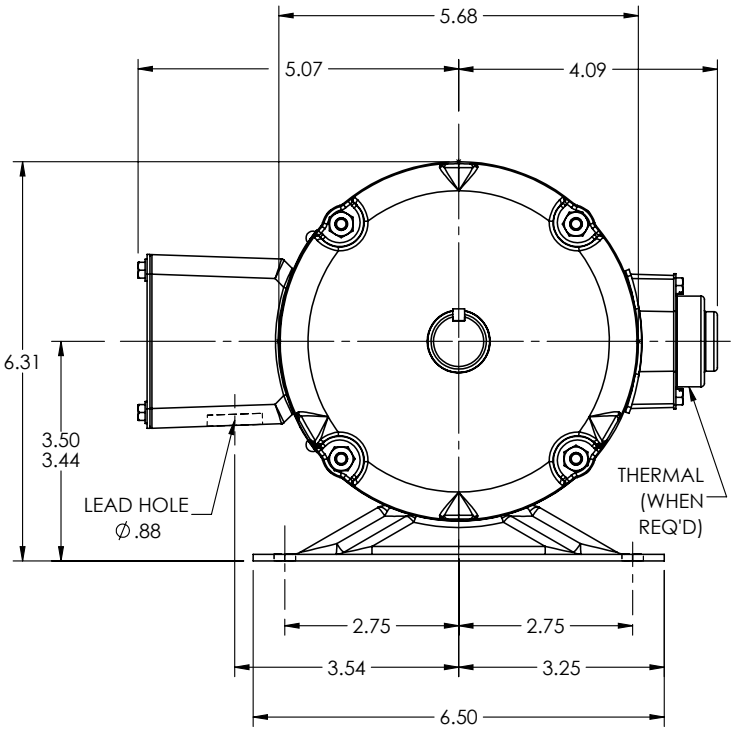

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION


REV. DESC: LOAD TO SOLIDWORKS			
REV: H	VERSION: 03	REVISED: 09:40:49 12/13/2022	TDR: 000001194274
34LY3482	MODEL NO. 34LY3482		REF: -
	BY: ENFRAJ0		


BALDOR - RELIANCE®

STD HORZ MODEL 34M NEMA 143T OPEN

34LY3482

CD0005

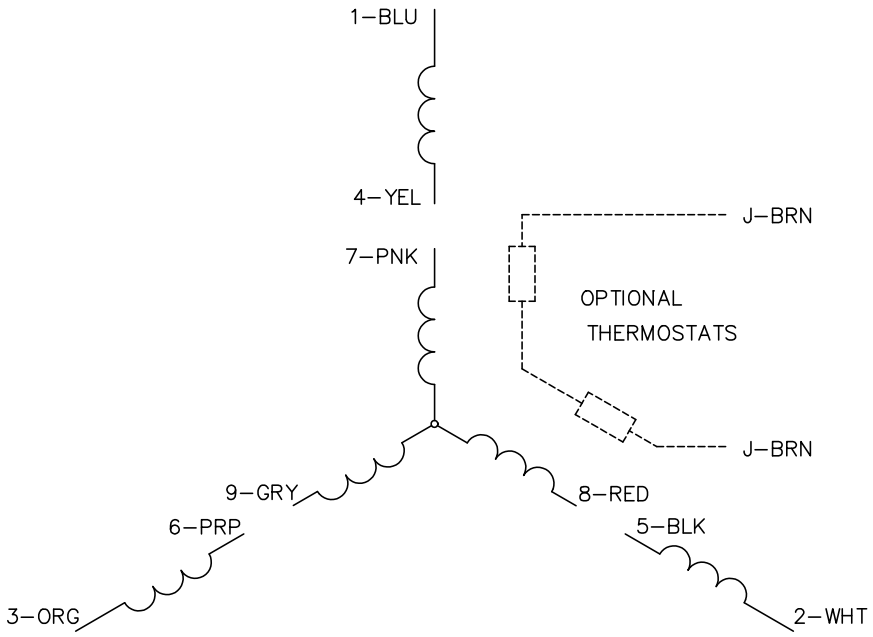

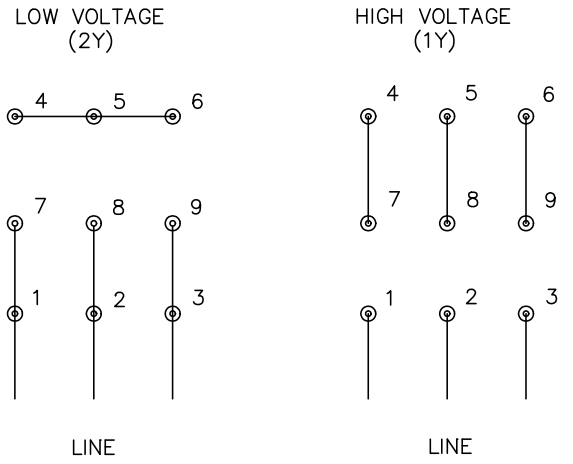

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS