ABB BALDOR RELIANCE

Customer information packet

EJPM4114T

50HP, 3540RPM, 3PH, 60HZ, 326JP, 1252M, TEFC, F
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 10:46:34 AM

Specifications

Enclosure	TEFC
Frame	326JP
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	50.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
Agency Approvals	CSA
	CSA EEV
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	124.000 A @ 208.0 V
	56.000 A @ 460.0 V
	112.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	V
Type	AC
Mech. spec.	12H62
Base	
Status	PRD/A
Elec. spec.	12WGY277
Layout	12LYH062
Eff. date	04-15-2026
CD Diagram	CD0180
Poles	02
Leads	9#8
Proprietary	False
Created date	04-28-2010

Heater Indicator	No Heater
High Voltage Full Load Amps	56.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1252M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	33.41 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.750 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3540 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	NONE (OLD)
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None

Nameplate

NP3443LUA											
CAT.NO.	EJPM4114T			**CUST. P/N**						**ENCL**	TEFC
SPEC.	12H062Y277G1	**CC**	010A	**FRAME**	326JP		**SER.NO.**				
HP	50		**CLASS**	F	**HZ**	60					
R.P.M.	3540		**PH.**	3	**DES.**	A					
VOLTS	230/460			**CODE**	H		**ODE BRG**	6311	**DE BRG**	6312	
AMPS	112/56										
RATING	40C AMB-CONT			**NEMA NOM. EFF.**	93			**GREASE**	POLYREX EM		
P.F.	89	**SER.F.**	1.15	**CT6-60H(10:1)VT3-60H(20:1**							
USABLE AT	50HZ 50HP 190/380V 136/68A			SF1.0							
VOLTS	**AMPS**		**MAX. SPACE HEATER TEMP.**								

AC Induction Motor Performance Data
Record # 30950
Typical performance - not guaranteed values

Winding: 12WGY277-R001	**Type:** 1252M	**Enclosure:** TEFC

Nameplate Data			
Rated Output (HP)			50
Volts			230/460
Full Load Amps			112/56
R.P.M.			3540
Hz	60	**Phase**	3
NEMA Design Code	A	**KVA Code**	H
Service Factor (S.F.)			1.15
NEMA Nom. Eff.	93	**Power Factor**	89
Rating - Duty			40C AMB-CONT
S.F. Amps			

460 V, 60 Hz: High Voltage Connection	
Full Load Torque	74.1 LB-FT
Start Configuration	direct on line
Breakdown Torque	310 LB-FT
Pull-up Torque	105 LB-FT
Locked-rotor Torque	144 LB-FT
Starting Current	431 A
No-load Current	18.9 A
Line-line Res. @ 25ºC	0.104 Ω
Temp. Rise @ Rated Load	79°C
Temp. Rise @ S.F. Load	95°C
Locked-rotor Power Factor	21
Rotor inertia	4.07 LB-FT2

Load Characteristics 460 V, 60 Hz, 50 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	56	78	85	89	90	90	90
Efficiency	90.1	93.5	94.3	94.1	93.5	93	93.7
Speed	3585	3574	3563	3552	3541	3530	3545
Line amperes	23.2	32.3	43.6	56.3	69.6	83.1	64.3


ABB Motors and Mechanical Inc.


WINDING # 12WGY277

50 HP 3 PH 60 HZ 3540 RPM 460 V 1252M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=310 PU=105 LR=144 LRA=431

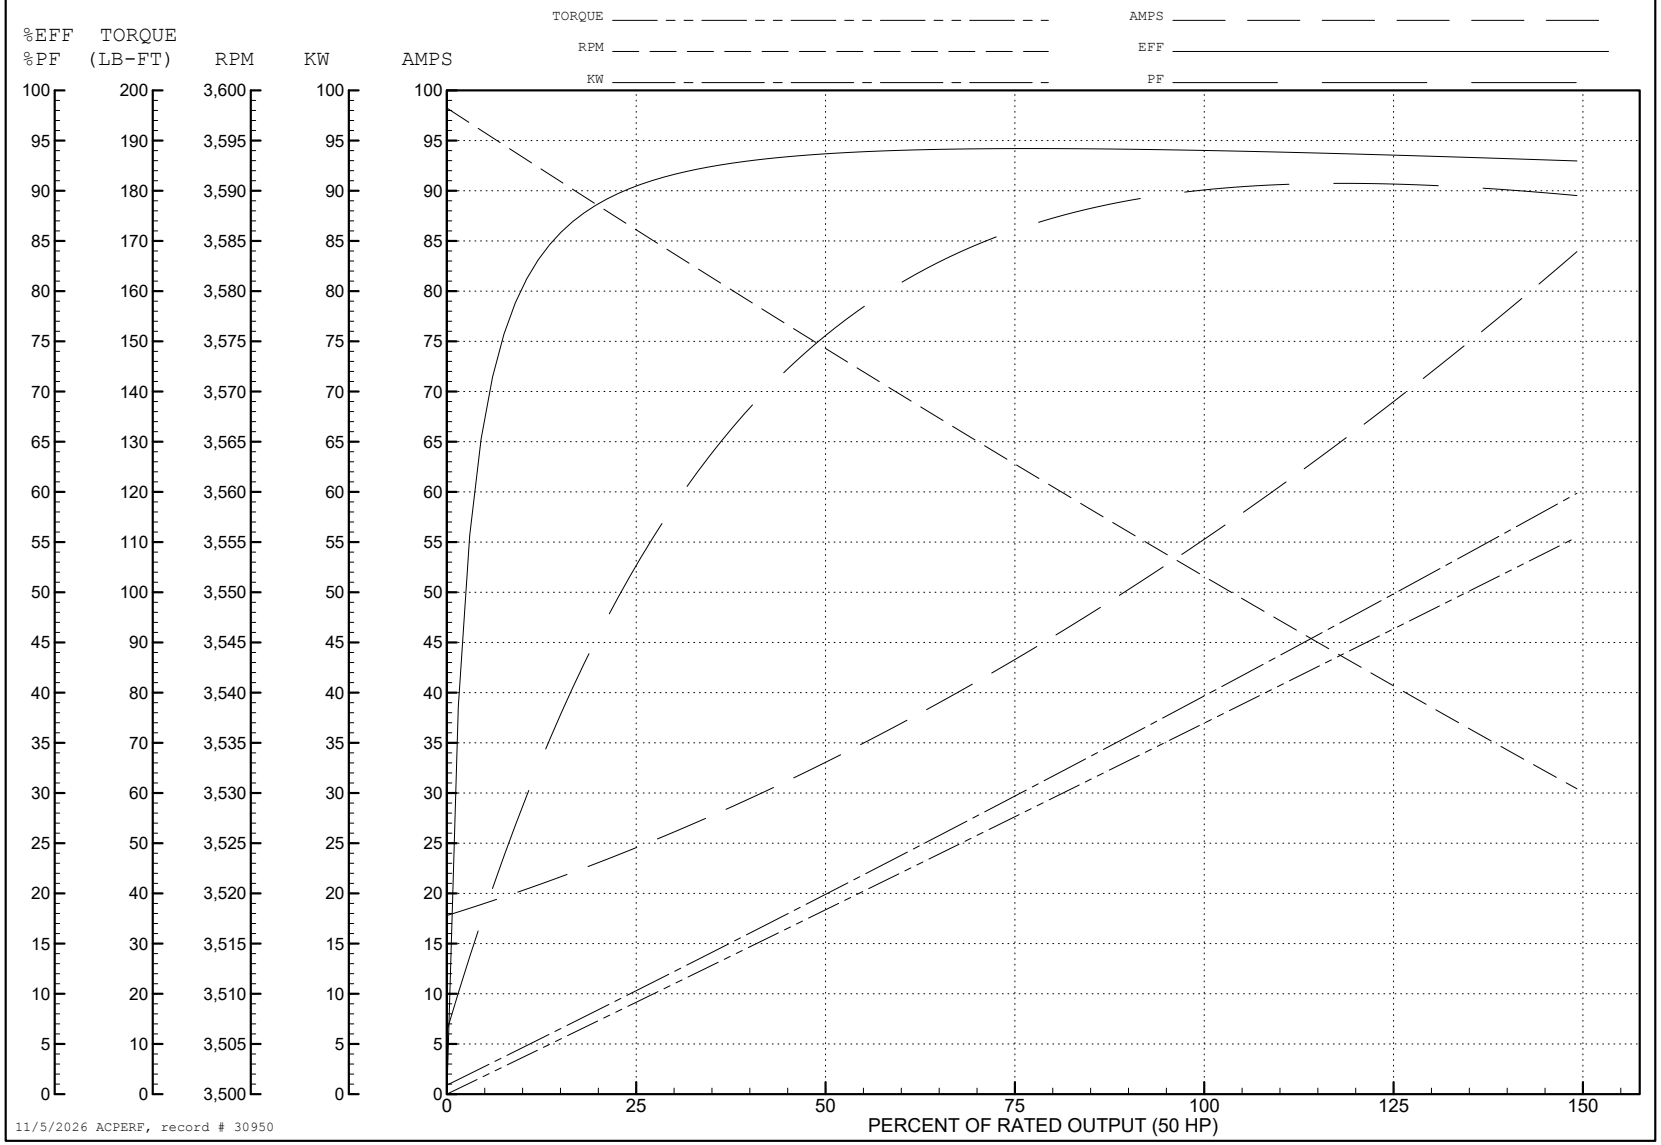


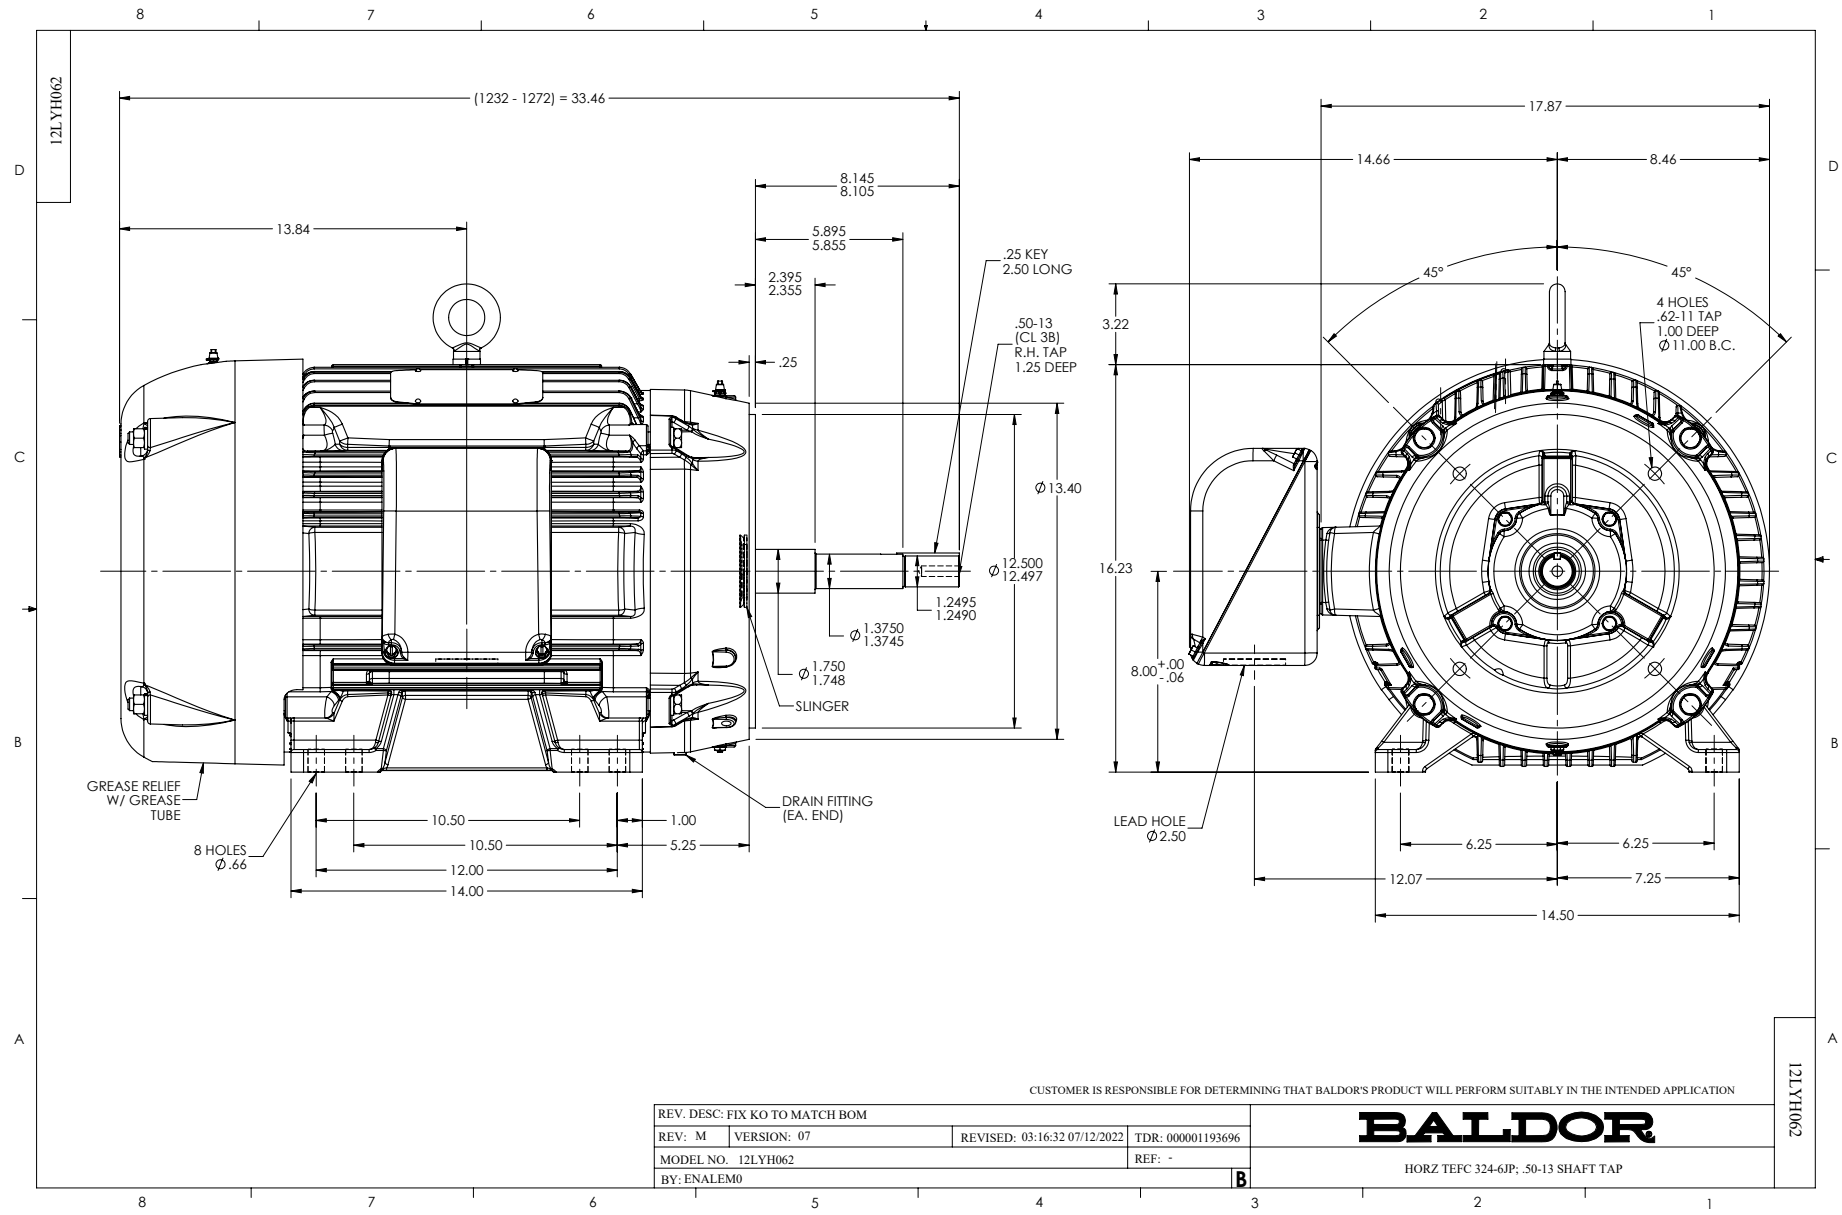
12LYH062
(1232 - 1272) = 33.46
13.84
8.145
8.105
5.895
5.855
2.395
2.355
.25
.25 KEY
2.50 LONG
.50-13
(CL 3B)
R.H. TAP
1.25 DEEP
Ø13.40
Ø12.500
12.497
1.2495
1.2490
Ø1.3750
1.3745
Ø1.750
1.748
SLINGER
DRAIN FITTING
(EA. END)
GREASE RELIEF
W/ GREASE
TUBE
8 HOLES
Ø.66
10.50
1.00
10.50
5.25
12.00
14.00
17.87
14.66
8.46
45°
45°
4 HOLES
.62-11 TAP
1.00 DEEP
Ø11.00 B.C.
3.22
16.23
8.00 +.00 -.06
LEAD HOLE
Ø2.50
6.25
6.25
12.07
7.25
14.50
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: FIX KO TO MATCH BOM
REV: M
VERSION: 07
REVISED: 03:16:32 07/12/2022
TDR: 000001193696
MODEL NO. 12LYH062
REF: -
BY: ENALEM0
B
BALDOR
HORZ TEFC 324-6JP; .50-13 SHAFT TAP
12LYH062

CD0180

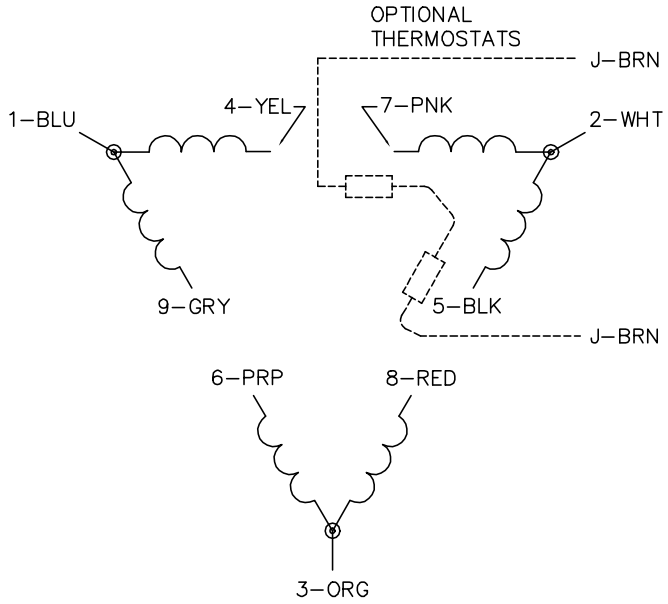

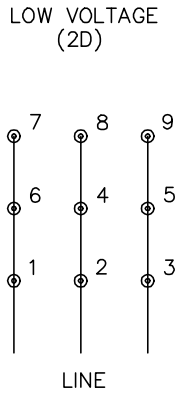

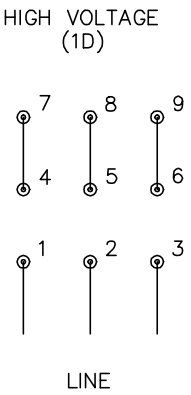

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10:25:29 02/19/2019	BY: ENBRIR0
MTL: –		

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1