

Product family features

- Can be used in conjunction with the following dimmer(s), switch(es), sensor(s), and accessories: Caséta Wireless, Diva, Luméa, Maestro, Pico wireless, Skylark, Skylark Contour, Sunnata, Vive Maestro Wireless controls, and Vive accessories
- All Lutron wallplates are screwless, seamless, and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in Designer style opening
- Blank inserts available for Gloss (DV-BI-) and Satin Colors (SC-BI-)
- Customize your designer wallplate with engraving; visit lutron.com/engraving to get started


Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing
- May require derating (i.e., reduction of dimmer capacity due to fin removal)


Available finishes

Use **BOLD** color code in model number (Example: SC-1-**PL**)


Gloss

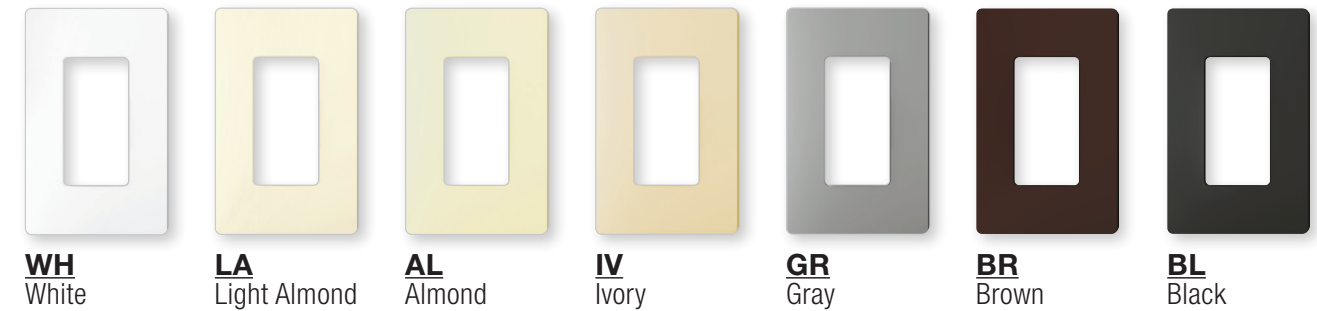

Satin Colors

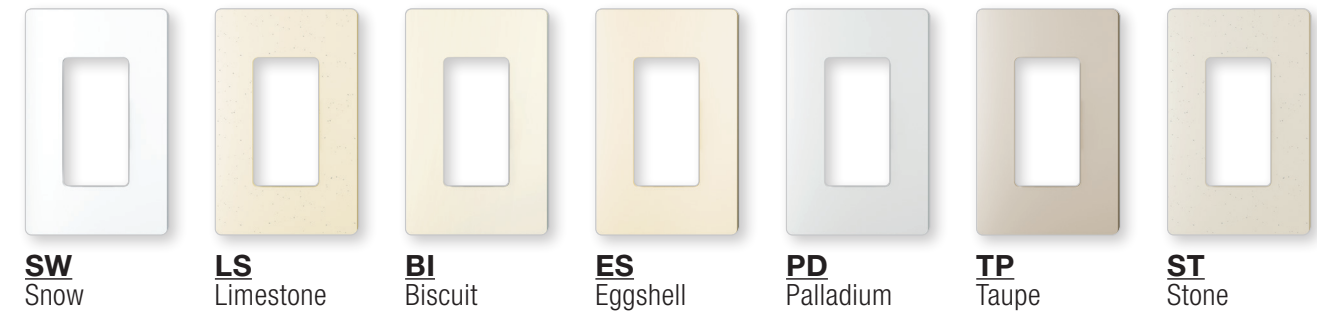


Metal*

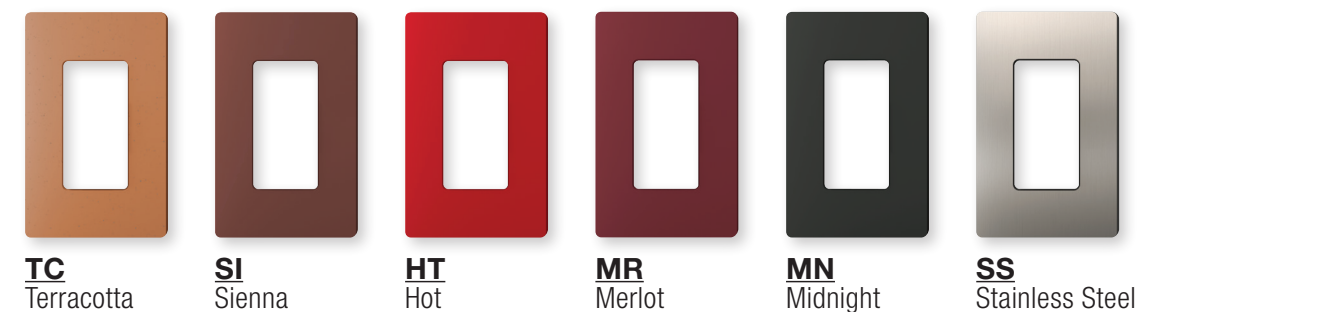

* Stainless Steel metal wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

GFCI Receptacles



- Self-testing technology allows GFCI to automatically check proper operation every 30 seconds
- LEDs indicate status of GFCI protection function
- Press reset button to reset GFCI after circuit interruption

Tamper-resistant, self-testing GFCI receptacles

15A 125V, GFCI	CAR-15-GFST- XX ¹
	SCR-15-GFST- XX ²
20A 125V, GFCI	SCR-20-GFST- XX ²

Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plug for dimming table and floor lamp
- Tamper-resistant shutter mechanism

Dual dimming, tamper-resistant receptacles

15A 120/125V	CAR-15-DDTR- XX ¹
	SCR-15-DDTR- XX ²
20A 120/125V	CAR-20-DDTR- XX ¹
	SCR-20-DDTR- XX ²

Receptacles for half dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plug for dimming table and floor lamp
- Bottom half is a general use receptacle and will fit standard duplex plugs
- Tamper-resistant shutter mechanism

Half dimming, tamper-resistant receptacles

15A 120/125V	CAR-15-HDTR- XX ¹
	SCR-15-HDTR- XX ²
20A 120/125V	CAR-20-HDTR- XX ¹
	SCR-20-HDTR- XX ²

Replacement plug for dimming



- This plug required for use with Lutron receptacles for dimming use—plug will also work in standard receptacle
- Easily replaces the existing plugs on lamps

Replacement dimming plugs

120/125V	RP-FDU-10- XX ¹
----------	-----------------------------------

UL/CSA/NOM regulatory approvals.

Important notes

- Receptacles and plugs for dimming use are UL Listed for use with all Lutron wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- For more information on dimming lamps consult Lutron Application Note #109, Guide to Dimming Portable Lamps via Receptacles, at lutron.com/applicationnotes.

XX¹: Gloss color codes
XX²: Satin color codes
Wallplates not included. Order separately.

XX¹: Available in White (WH) and Brown (BR)