ABB BALDOR RELIANCE

Customer information packet

CEM3614T

2HP, 1175RPM, 3PH, 60HZ, 184TC, 3644M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 4:48:19 PM

Specifications

Enclosure	TEFC
Frame	184TC
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
Agency Approvals	CURUSEEV
	NEMA PREMIUM
	NEMA PREMIUM (OLD LOGO)
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	7.000 A @ 208.0 V
	7.000 A @ 230.0 V
	3.500 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	N
Type	AC
Mech. spec.	36A002
Base	
Status	PRD/A
Elec. spec.	36WGS917
Layout	36LYA002
Eff. date	05-21-2025
CD Diagram	CD0005
Poles	06
Leads	9#16
Proprietary	False
Created date	06-04-2012

Heater Indicator	No Heater
High Voltage Full Load Amps	3.5 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	M
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3644M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	18.05 IN
Power Factor	60
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1175 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None

Nameplate

NP3441LUA									
CAT.NO.	CEM3614T								
SPEC	36A002S917G1								
HP	2								
VOLTS	230/460								
AMPS	7/3.5								
RPM	1175								
FRAME	184TC	**HZ**	60			**PH**	3		
SF	1.15	**CODE**	M	**DES**	A	**CLASS**	F		
NEMA NOM. EFF	88.5	**PF**	60						
RATING	40C AMB-CONT								
CC	010A								
ENCL	TEFC	**SER**							
DE	6206	**ODE**	6205						
VPWM INVERTER READY									
CT6-60H(10:1)VT3-60H(20:1									
	50Hz 2HP 190/380V 7.8/3.9A								SF1.0

AC Induction Motor Performance Data
Record # 53367
Typical performance - not guaranteed values

Winding: 36WGS917-R019	**Type:** 3644M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			2	**Full Load Torque**	8.91 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			7/3.5	**Breakdown Torque**	40.2 LB-FT
R.P.M.			1175	**Pull-up Torque**	21.6 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	28.2 LB-FT
NEMA Design Code	A	**KVA Code**	M	**Starting Current**	27.5 A
Service Factor (S.F.)			1.15	**No-load Current**	2.45 A
NEMA Nom. Eff.	88.5	**Power Factor**	60	**Line-line Res. @ 25ºC**	4.02 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	34°C
S.F. Amps				**Temp. Rise @ S.F. Load**	39°C
				Locked-rotor Power Factor	28.7
				Rotor inertia	0.413 LB-FT2

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	24	40	52	60	66	70	64
Efficiency	76.4	85.3	87.9	88.8	88.9	88.2	88.8
Speed	1197	1191	1186	1179	1173	1166	1175
Line amperes	2.53	2.76	3.09	3.49	3.97	4.52	3.78


ABB Motors and Mechanical Inc.


WINDING # 36WGS917

2 HP 3 PH 60 HZ 1175 RPM 460 V 3644M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=40.2 PU=21.6 LR=28.2 LRA=27.5

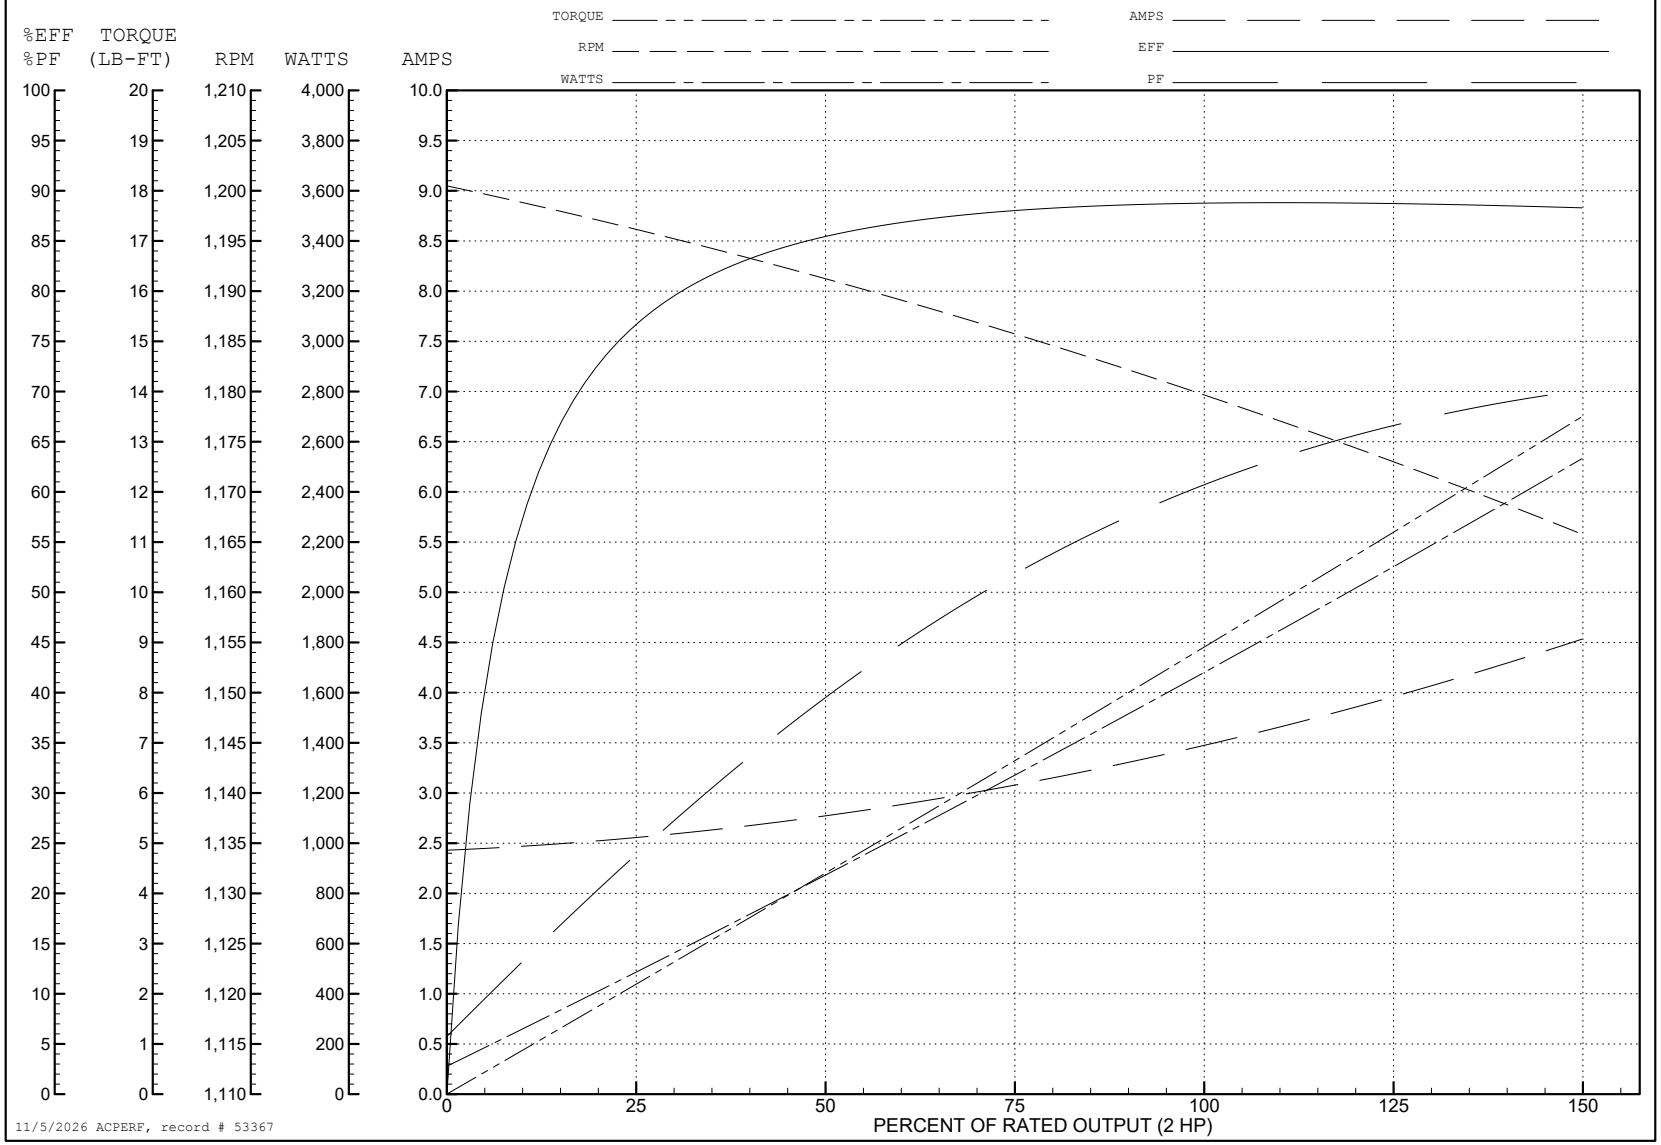

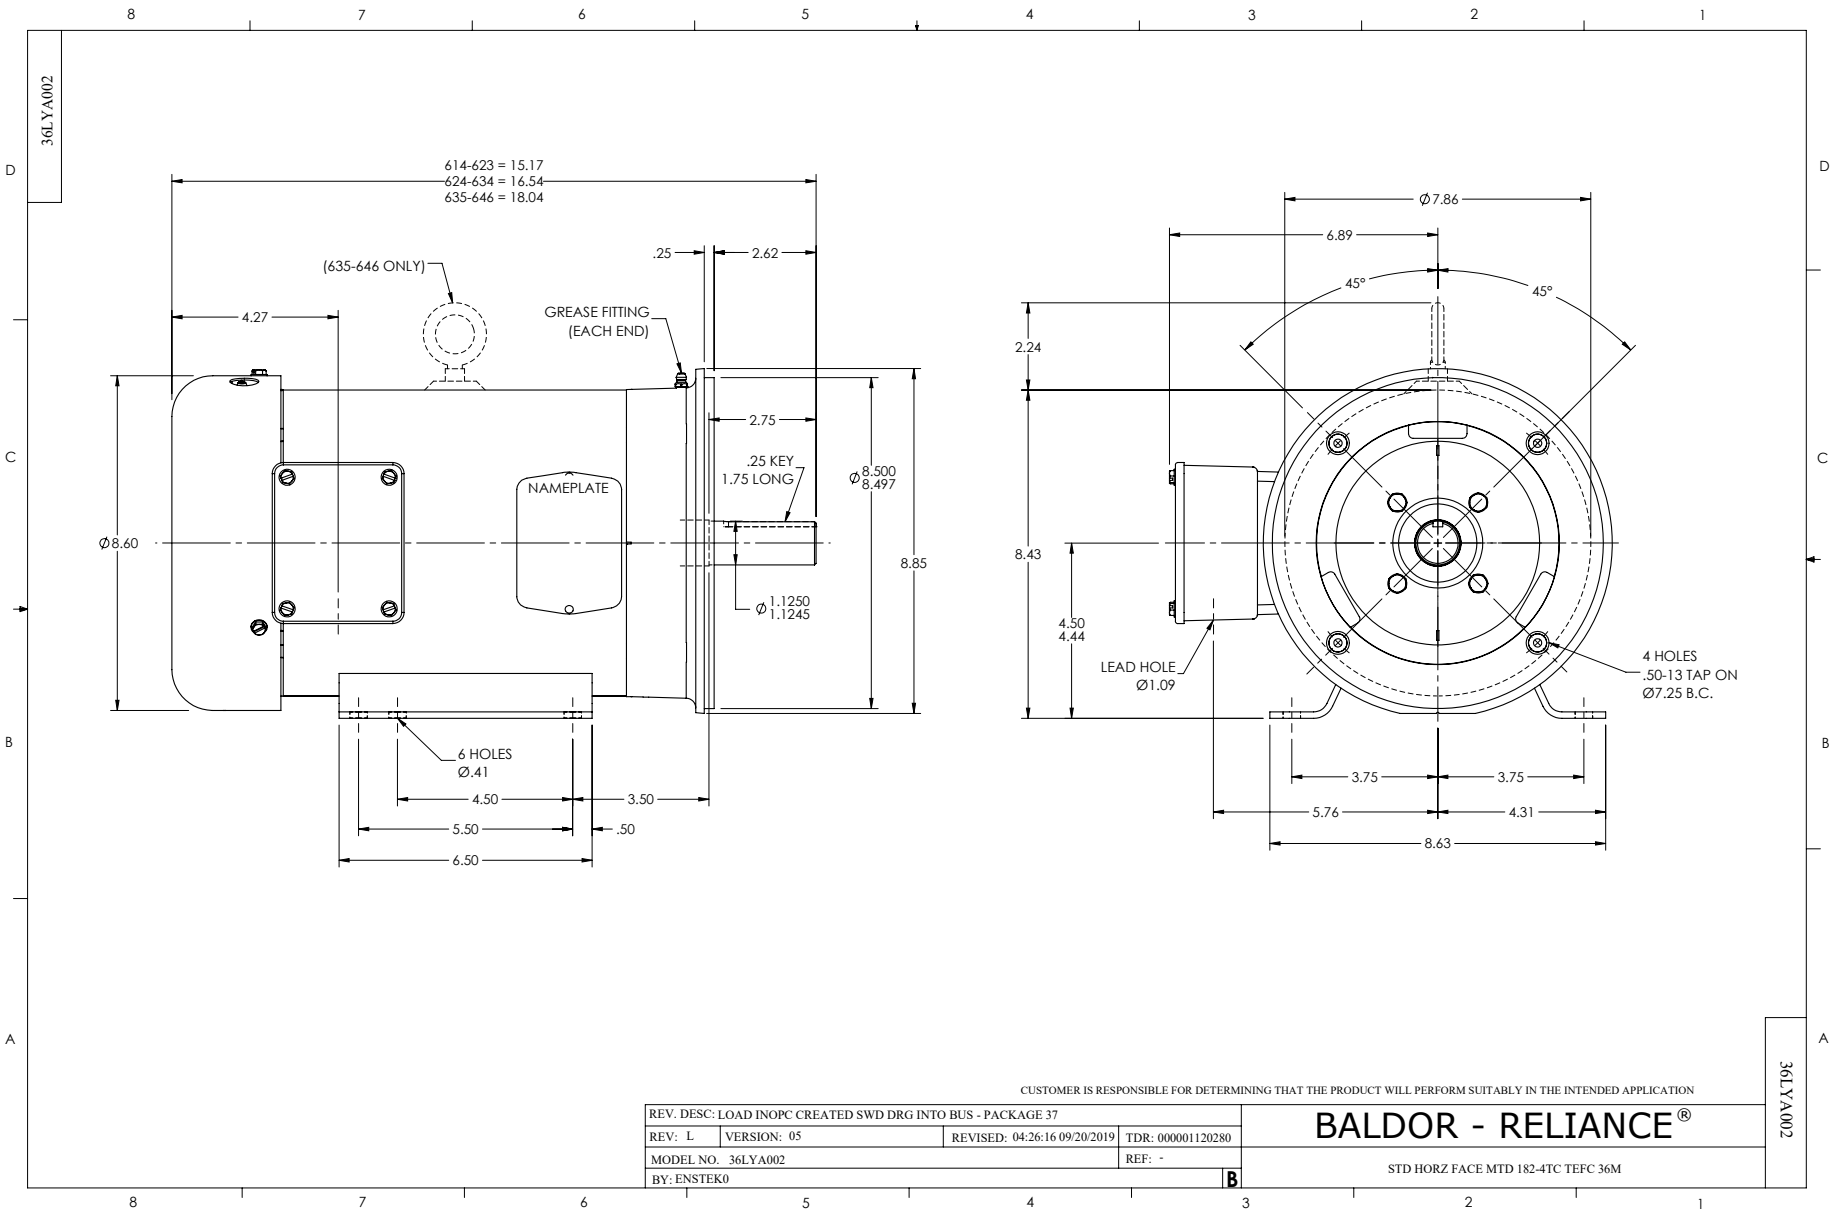
36LYA002
614-623 = 15.17
624-634 = 16.54
635-646 = 18.04
(635-646 ONLY)
.25
2.62
4.27
GREASE FITTING
(EACH END)
2.75
.25 KEY
1.75 LONG
NAMEPLATE
Ø8.500
8.497
Ø8.60
8.85
Ø1.1250
1.1245
6 HOLES
Ø.41
4.50
3.50
5.50
.50
6.50
Ø7.86
6.89
45°
45°
2.24
8.43
4.50
4.44
LEAD HOLE
Ø1.09
4 HOLES
.50-13 TAP ON
Ø7.25 B.C.
3.75
3.75
5.76
4.31
8.63
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: LOAD INOPC CREATED SWD DRG INTO BUS - PACKAGE 37
REV: L
VERSION: 05
REVISED: 04:26:16 09/20/2019
TDR: 000001120280
MODEL NO. 36LYA002
REF: -
BY: ENSTEK0
B
BALDOR - RELIANCE®
STD HORZ FACE MTD 182-4TC TEFC 36M
36LYA002

CD0005

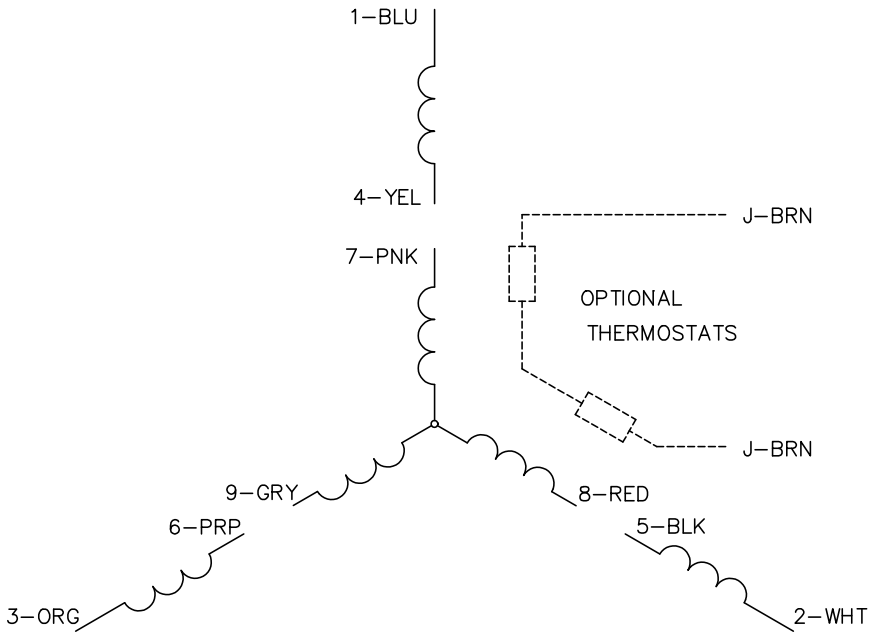

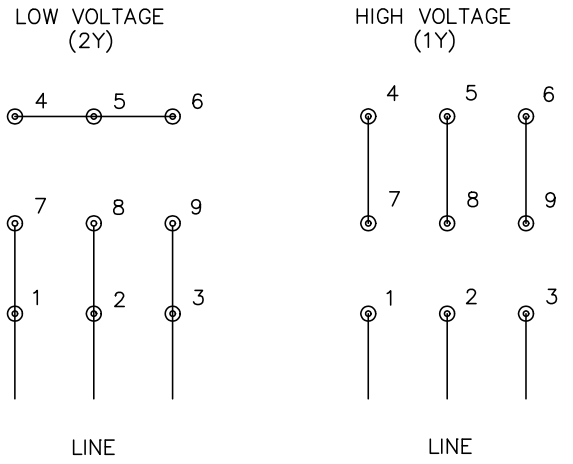

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS