

Standard wire:

L/live wire:Black\Brown;

N/null wire:White\Blue;

Ground wire:Green\Yellow-green.

Warning/Avertissement:

MIN 90°C SUPPLY CONDUCTORS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE
INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND
OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

LES FILS D'ALIMENTATION 90 °C MIN

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT,
PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT
AINSI QUE LES RISQUES INHÉRENTS.

LED Wall Pack Light Instruction

Application:

Available in industrial lighting, landscape lighting, courtyard, building, hotel,
building exterior, etc.

Caution:


- 1.Can not use the electric generator to test the LED lamp.
- 2.Please abide by related country, regional and local law and regulations when install this fixture.
- 3.Please don't install the fixture when raining to lower the risk of electric shock and avoid the failure.

Note:


1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.

Installation I:


1. Turn off the power




2. Loosen the 4 screws




3. Remove the 1/2 end cap




4. Peel off the yellow sticker and paste it on the round area of the bottom plate




5. Fix the bottom plate on the round plate




6. Make wiring connection and make sure the good protection

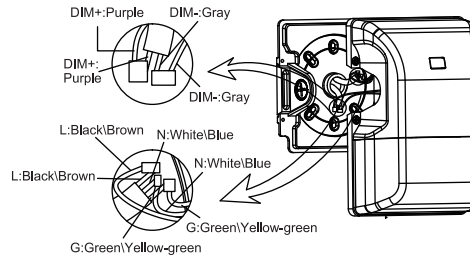


7. Fix the fixture by 4 screws




8. Make sure good wiring and screws fastening, then turn on the power




5. Remove one of the 1/2 end cap and get through wire

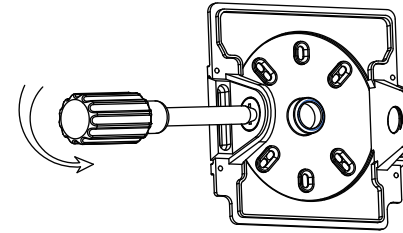


6. Make wiring connection and make sure the good protection

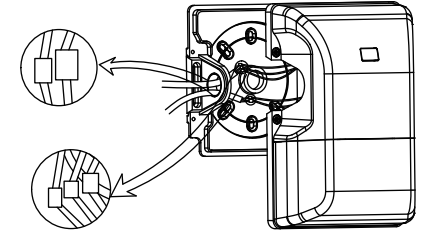

7. Return on the fixture to the bottom plate and tighten it with screws




8. Turn on the power after make sure good wiring and insulation




Note: if the lamp is designed with CCT adjustable function, After the product base is fixture, choose the requested Power Percentage by dip switching.

Installation II:


1. Turn off the power





2. Loosen the 4 screws



3. Paste the black sponge pad on the bottom plate



4. Screw the bottom plate on the wall

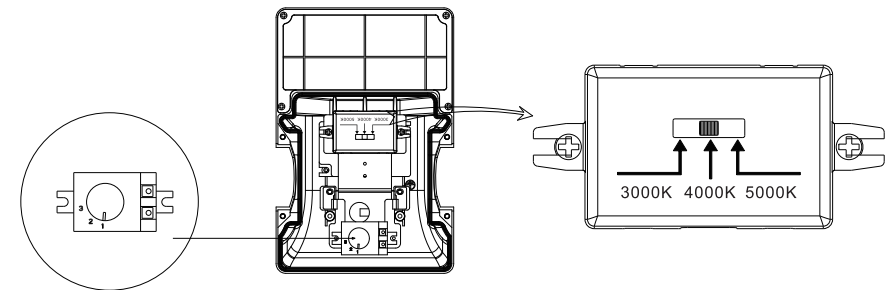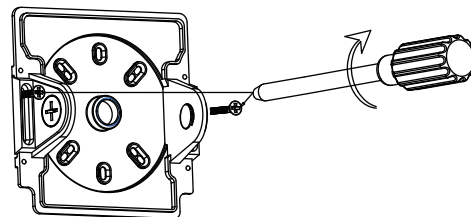

Gear	Power Percentage
1	25%
2	Anyvaluefrom25%-100%
3	100%