


DATASHEET - RM1000

OVERVIEW

The RM1000 mixer is designed to mix epoxy and other resins automatically with no cleanup. A container (not included) is placed in the counter-rotating chuck which secures the container.

INSTALLATION

- Plug in the 12VDC power adapter into the barrel jack in the rear to provide power.

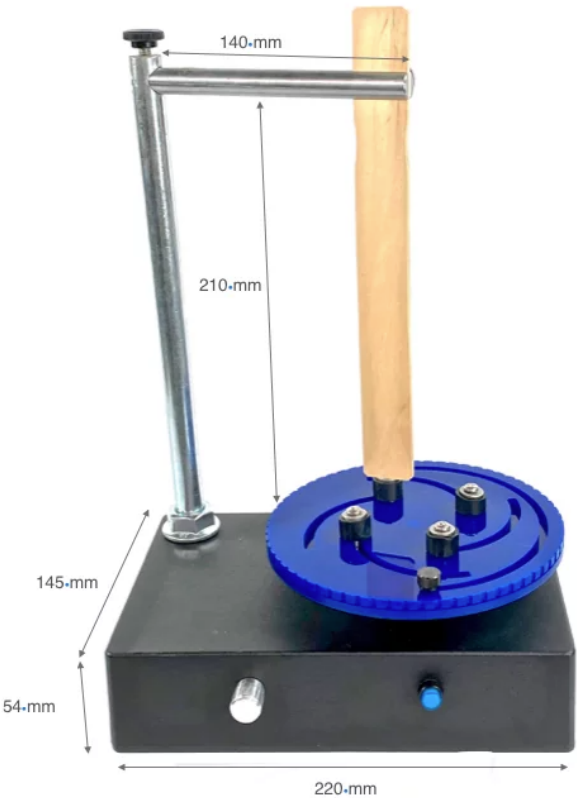

SPECIFICATIONS

PHYSICAL	
Material	Aluminum, powder coated
Dimensions	220 x 145 x 54 mm
Disc material	Acrylic (6 mm thickness)
Posts	Zinc plated steel
Ingress	IP45
Wood paddles	9" tall x 3.6 mm [0.162"] thick
ELECTRICAL	
Motor RPM	66
Motor Torque	3Kg.cm 0.3N.m)1:360
Motor Lock rotor amps	1.25A
Output power	4.2w MAX (DC24.0V)
Voltage	12VDC
Voltage convertor	12VDC, 2A max.