Customer information packet

XM18342T-5

32M 4P XPFC HOR 182T T'STATS INVERTER
Class - CLI GP D; CLII GP F,G
Division - Division I

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 4:55:42 PM

Specifications

Enclosure	XPFC
Frame	182T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA EEV
	UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1.3
Current @ Voltage	3.300 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.3 a
Insulation Class	F

Part Detail

Revision	F
Type	AC
Mech. spec.	36R726
Base	
Status	PRD/A
Elec. spec.	36WGS582
Layout	36LYR726
Eff. date	06-18-2026
CD Diagram	CD0006
Poles	04
Leads	3#16
Proprietary	False
Created date	12-19-2018

Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X3632M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.93 IN
Power Factor	75
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP0887XPSLEV											
NO.				**CC**	010A						
S/N				**TEMP CODE**	T3C						
SPEC.	36R726S582G1			**INV.TYPE**	PWM						
CAT.NO.	XM18342T-5			**C HP FR**	60	**C HP TO**	90				
HP	3			**CT HZ FROM**	1.3			**CT HZ TO**	60		
VOLTS	575			**VT HZ FROM**	1.3			**VT HZ TO**	60		
AMPS	3.3			**MAG CUR**	1.9						
RPM	1760			**MX RPM**	2700						
HZ	60	**PH**	3	**CL**	F	**NOM.EFF.**	89.5				
SER.F.	1.00	**DES**	B	**SL HZ**	1.3	**WK2**	0.3				
FRAME	182T	**RATING**	40C AMB-CONT								
	55C AMB AT 1.00 SF SINEWAVE										
	NEMA MG-1 PART 5, IP54				1.15 SF SINEWAVE						


AC Induction Motor Performance Data
Record # 73921
Typical performance - not guaranteed values


Winding: 36WGS582-R023	**Type:** 3632M	**Enclosure:** XPFC

Nameplate Data				**575 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			3	**Full Load Torque**	8.89 LB-FT
Volts			575	**Start Configuration**	direct on line
Full Load Amps			3.3	**Breakdown Torque**	33.8 LB-FT
R.P.M.			1760	**Pull-up Torque**	19.5 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	23 LB-FT
NEMA Design Code	B	**KVA Code**	K	**Starting Current**	25.9 A
Service Factor (S.F.)			1	**No-load Current**	1.9 A
NEMA Nom. Eff.	89.5	**Power Factor**	75	**Line-line Res. @ 25ºC**	5.97 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	41°C
				Locked-rotor Power Factor	42.5
				Rotor inertia	0.298 LB-FT2

Load Characteristics 575 V, 60 Hz, 3 HP


% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	34	55	68	75	79	82
Efficiency	77.1	85.5	87.9	88.3	87.9	86.8
Speed	1791	1782	1772	1762	1750	1737
Line amperes	2.04	2.36	2.8	3.37	4	4.7

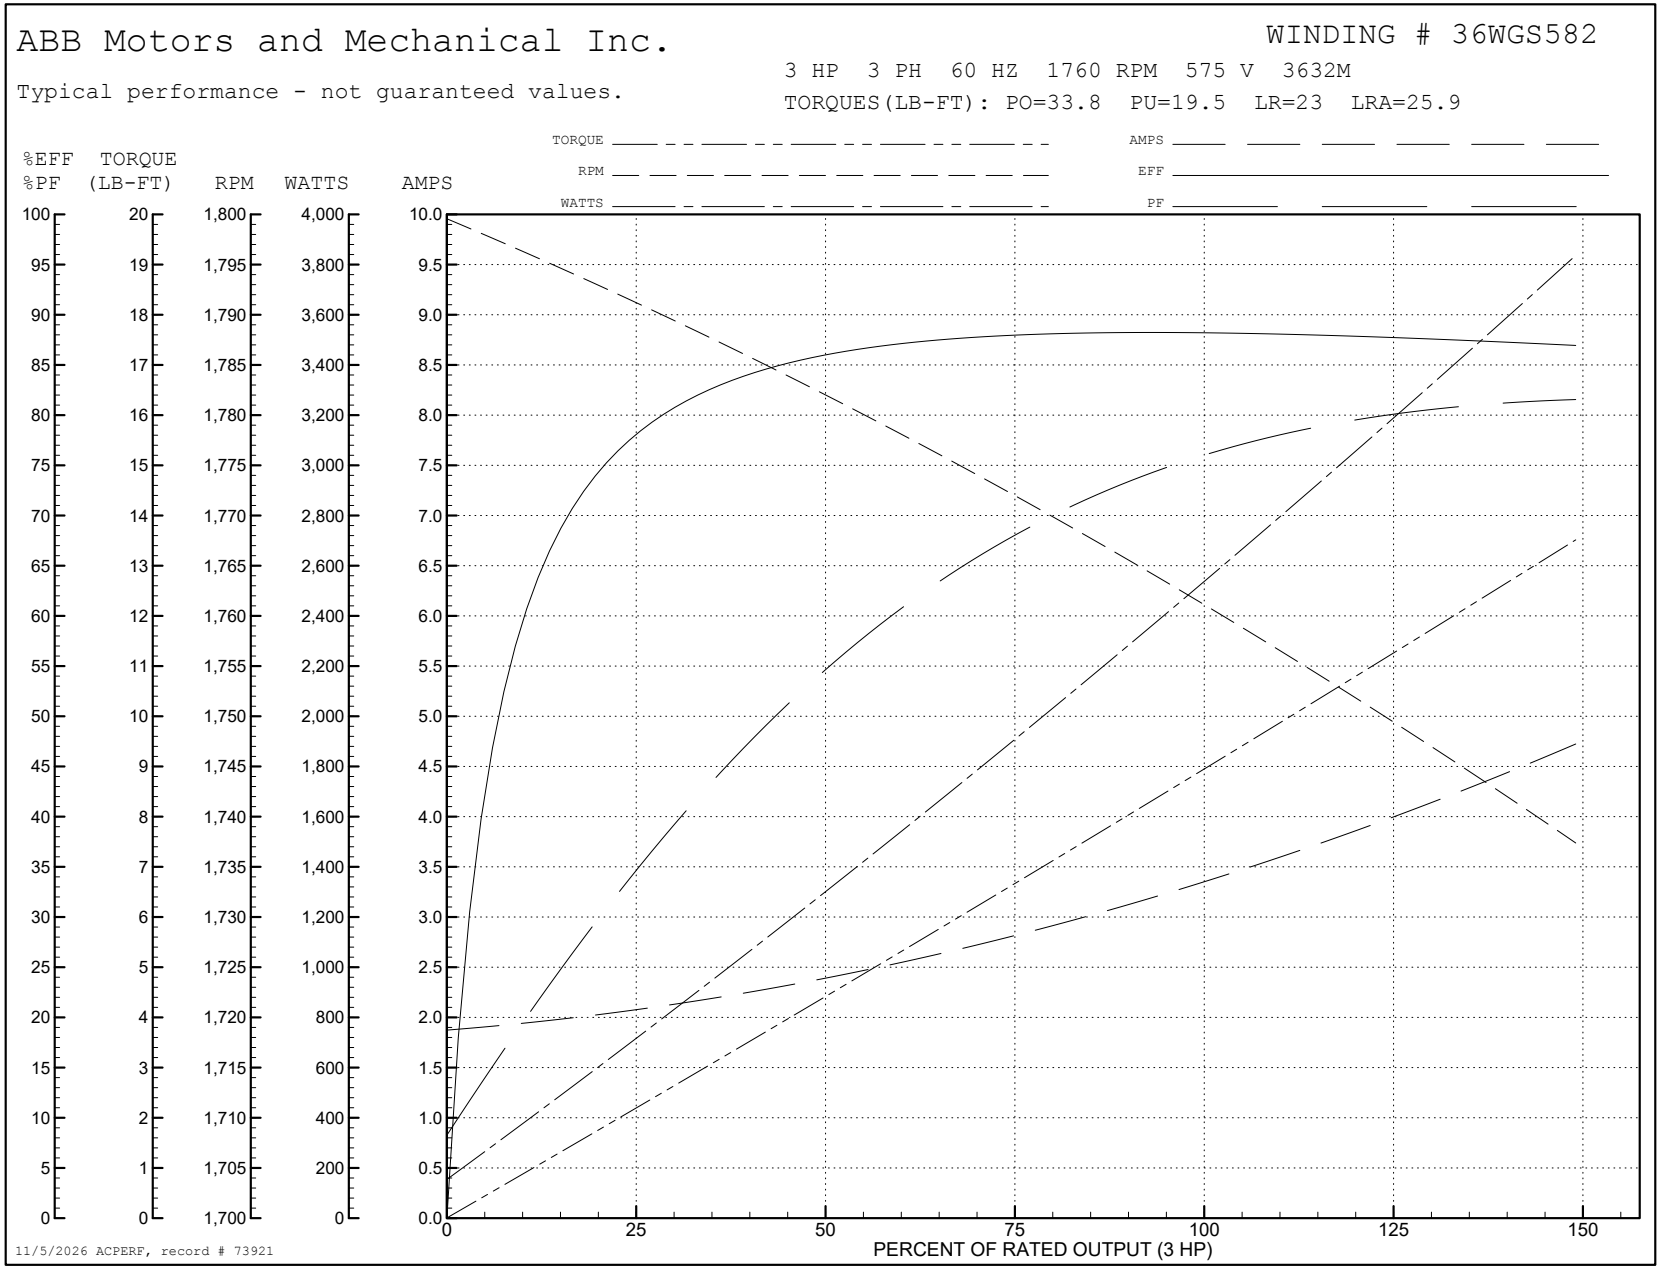

ABB Motors and Mechanical Inc.
WINDING # 36WGS582
Typical performance - not guaranteed values.
3 HP 3 PH 60 HZ 1760 RPM 575 V 3632M
TORQUES(LB-FT): PO=33.8 PU=19.5 LR=23 LRA=25.9
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF
%PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (3 HP)
11/5/2026 ACPERF, record # 73921

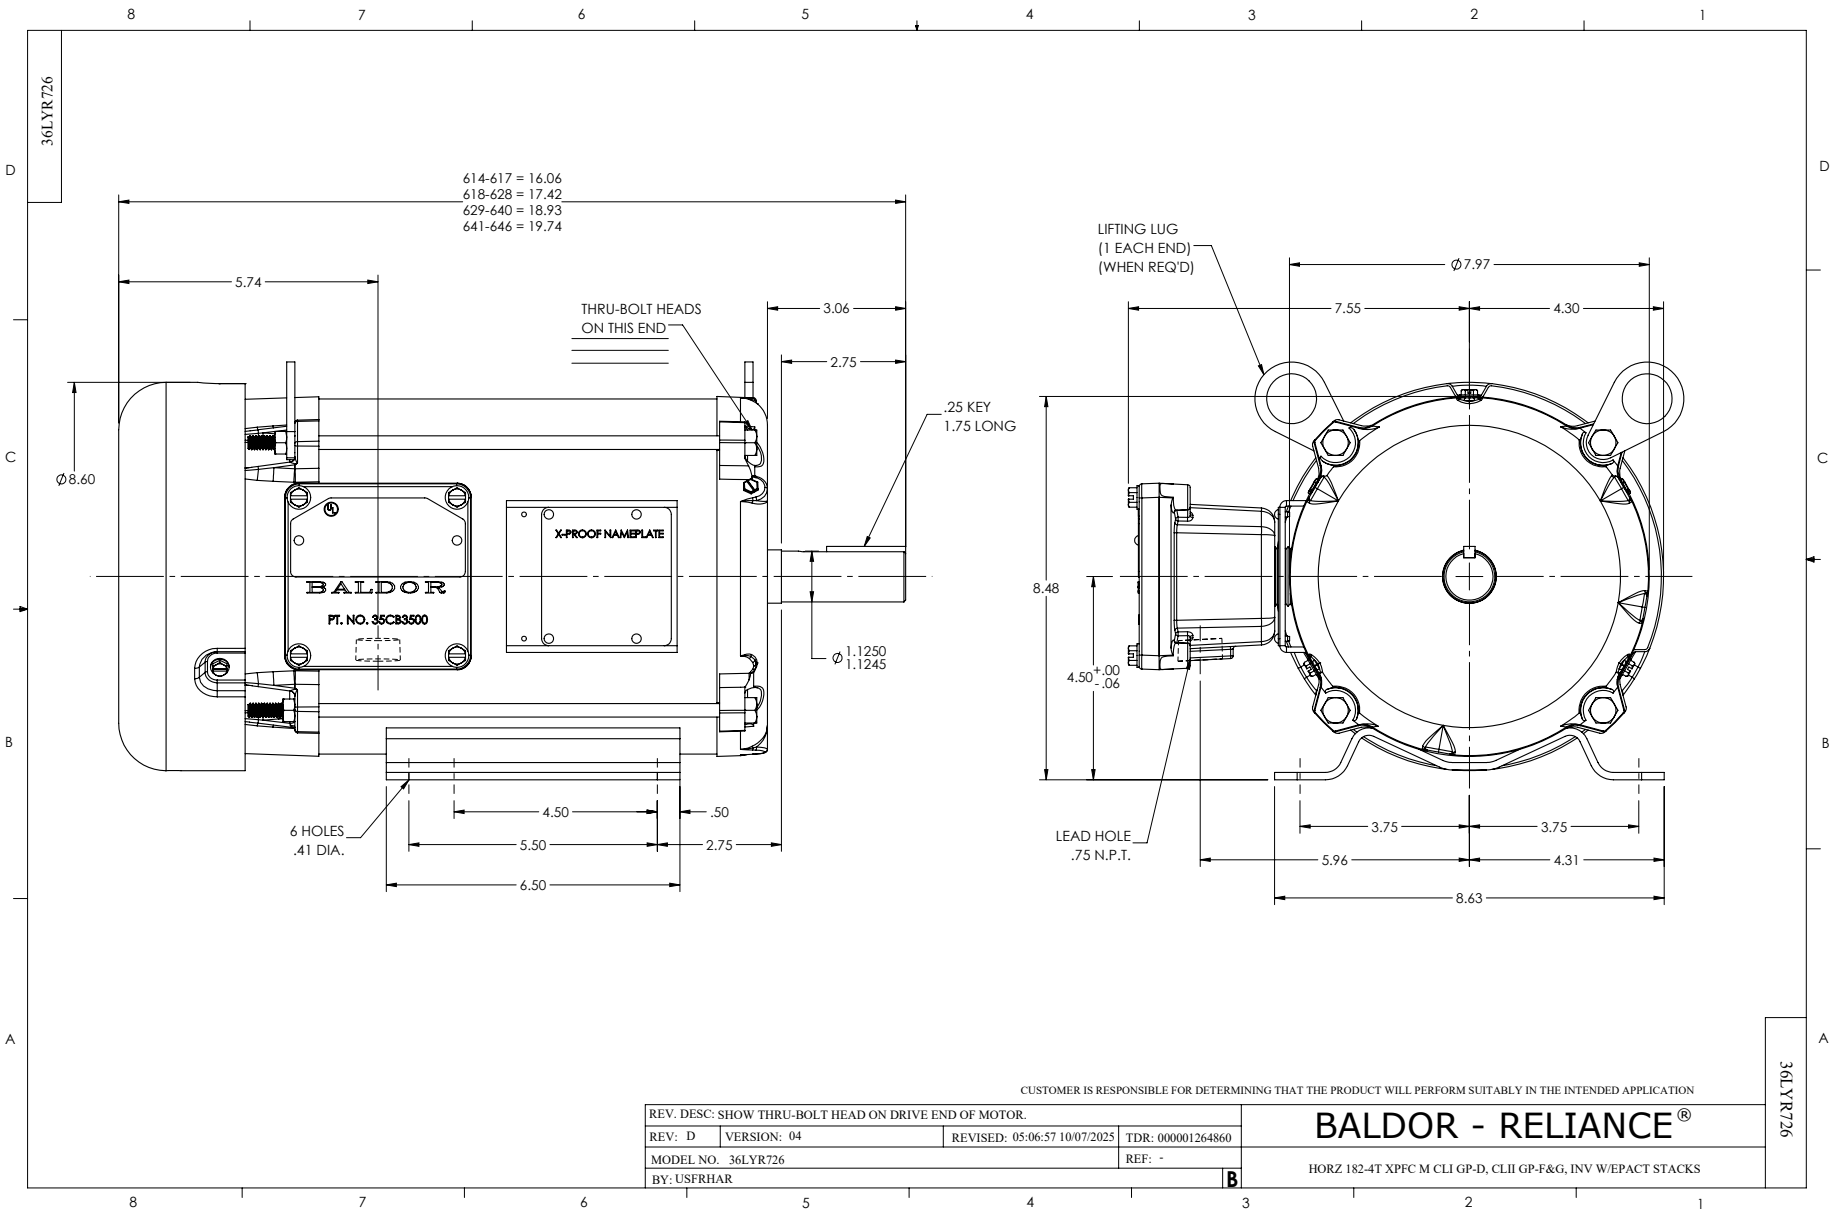
36LYR726
614-617 = 16.06
618-628 = 17.42
629-640 = 18.93
641-646 = 19.74
5.74
THRU-BOLT HEADS
ON THIS END
3.06
2.75
.25 KEY
1.75 LONG
Ø8.60
BALDOR
PT. NO. 35CB3500
X-PROOF NAMEPLATE
Ø1.1250
1.1245
6 HOLES
.41 DIA.
4.50
.50
5.50
2.75
6.50
LIFTING LUG
(1 EACH END)
(WHEN REQ'D)
Ø7.97
7.55
4.30
8.48
4.50 +.00 -.06
LEAD HOLE
.75 N.P.T.
3.75
3.75
5.96
4.31
8.63
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: SHOW THRU-BOLT HEAD ON DRIVE END OF MOTOR.
REV: D
VERSION: 04
REVISED: 05:06:57 10/07/2025
TDR: 000001264860
MODEL NO. 36LYR726
REF: -
BY: USFRHAR
B
BALDOR - RELIANCE®
HORZ 182-4T XPFC M CLI GP-D, CLII GP-F&G, INV W/EPACT STACKS
36LYR726


CD0006

TYPICAL WYE–CONNECTED MOTOR

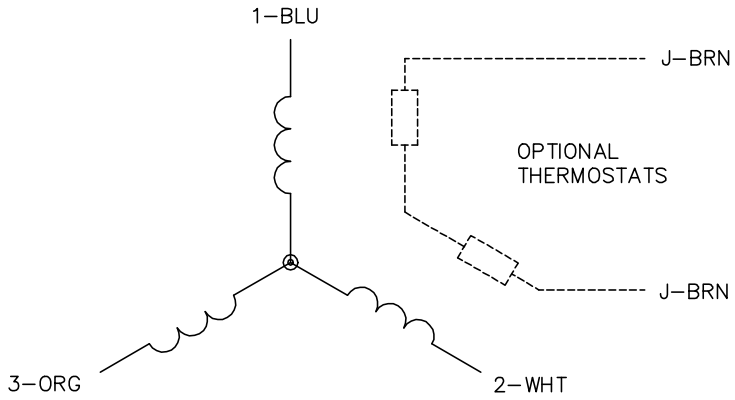



TYPICAL DELTA–CONNECTED MOTOR

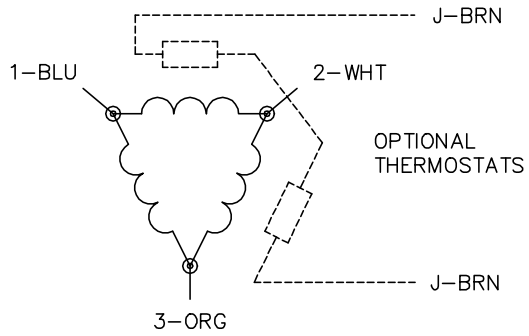

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIR0
MTL: –		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1