ABB BALDOR RELIANCE

Customer information packet

M3534-5

.33HP, 1725RPM, 3PH, 60HZ, 56, 3413M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 9:00:48 AM

Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.640 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	68.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	0.6 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L

Part Detail

Revision	Y
Type	AC
Mech. spec.	34A061
Base	
Status	PRD/A
Elec. spec.	34WG0901
Layout	34LYA061
Eff. date	12-30-2024
CD Diagram	CD0006
Poles	04
Leads	3#18
Proprietary	False
Created date	01-01-0001

Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3413M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.35 IN
Power Factor	57
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M3534-5								
SPEC.	34A61-901								
HP	.33								
VOLTS	575								
AMP	.64								
RPM	1725								
FRAME	56	**HZ**	60			**PH**	3		
SER.F.	1.35	**CODE**	L	**DES**	B	**CLASS**	B		
NEMA-NOM-EFF	68	**PF**	57						
RATING	40C AMB-CONT								
CC									
DE	6203	**ODE**	6203						
ENCL	TEFC	**SN**							
	SFA .7								

Accessories

Part number	Description	Multiplier
34-171	C FACE KIT	A8

AC Induction Motor Performance Data
Record # 94834
Typical performance - not guaranteed values

Winding: 34WG0901-R019	**Type:** 3413M	**Enclosure:** XPFC

Nameplate Data				**575 V, 60 Hz: Single Voltage Motor**	
Rated Output (HP)			.33	**Full Load Torque**	0.9904 LB-FT
Volts			575	**Start Configuration**	direct on line
Full Load Amps			.64	**Breakdown Torque**	4.9 LB-FT
R.P.M.			1745	**Pull-up Torque**	3.35 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	3.5 LB-FT
NEMA Design Code	B	**KVA Code**	M	**Starting Current**	3.6 A
Service Factor (S.F.)			1.15	**No-load Current**	0.5921 A
NEMA Nom. Eff.	67	**Power Factor**	57	**Line-line Res. @ 25ºC**	78 Ω
Rating - Duty				**Temp. Rise @ Rated Load**	47°C
S.F. Amps				**Temp. Rise @ S.F. Load**	50°C
				Locked-rotor Power Factor	69.8
				Rotor inertia	0.031 lb-ft²

Load Characteristics 575 V, 60 Hz, 0.33 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	25.8953	35.9552	45.283	53.4828	57.8665	60.5621	56
Efficiency	40.0473	56.1344	64.3514	68.8858	70.6093	71.4645	69.9
Speed	1785.321	1774.521	1763.091	1751.121	1743.561	1738.34	1747
Line amperes	0.5981	0.6132	0.6377	0.6712	0.6958	0.714	0.686


ABB Motors and Mechanical Inc.

WINDING # 34WG0901


0.33 HP 3 PH 60 HZ 1745 RPM 575 V 3413M

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=4.9 PU=3.35 LR=3.5 LRA=3.6

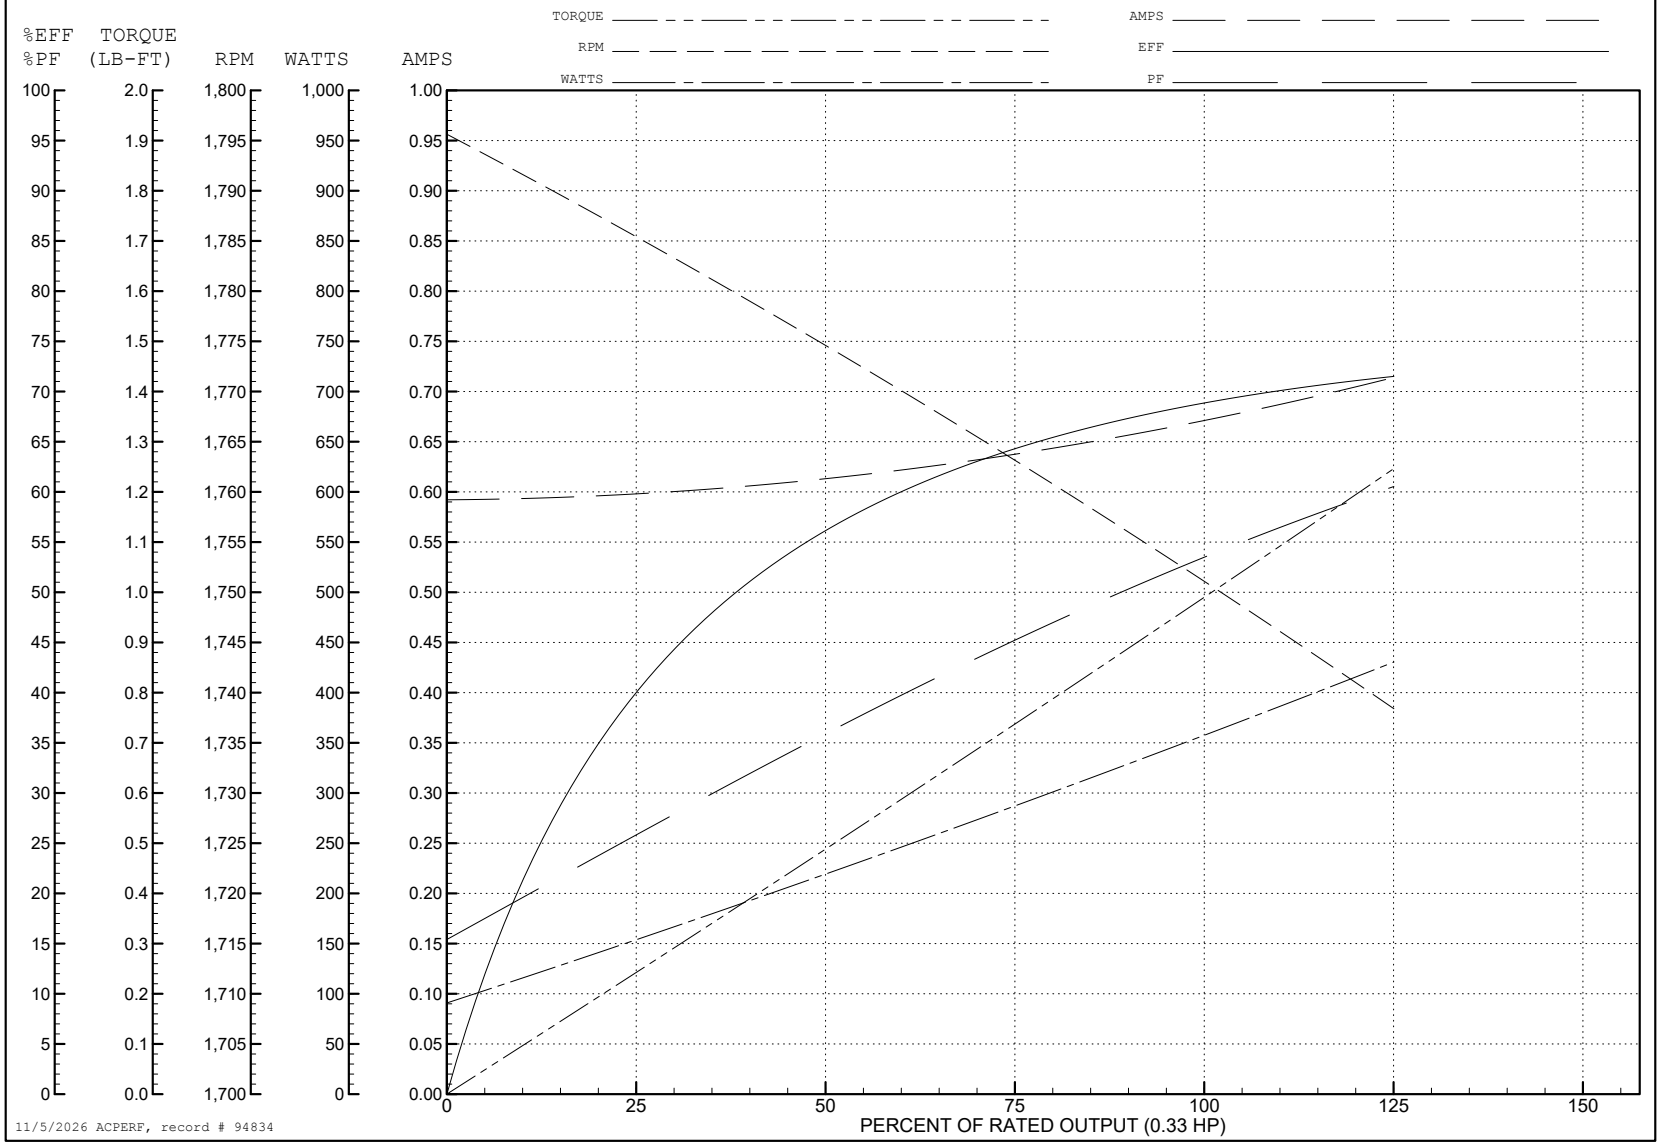

34LYA061

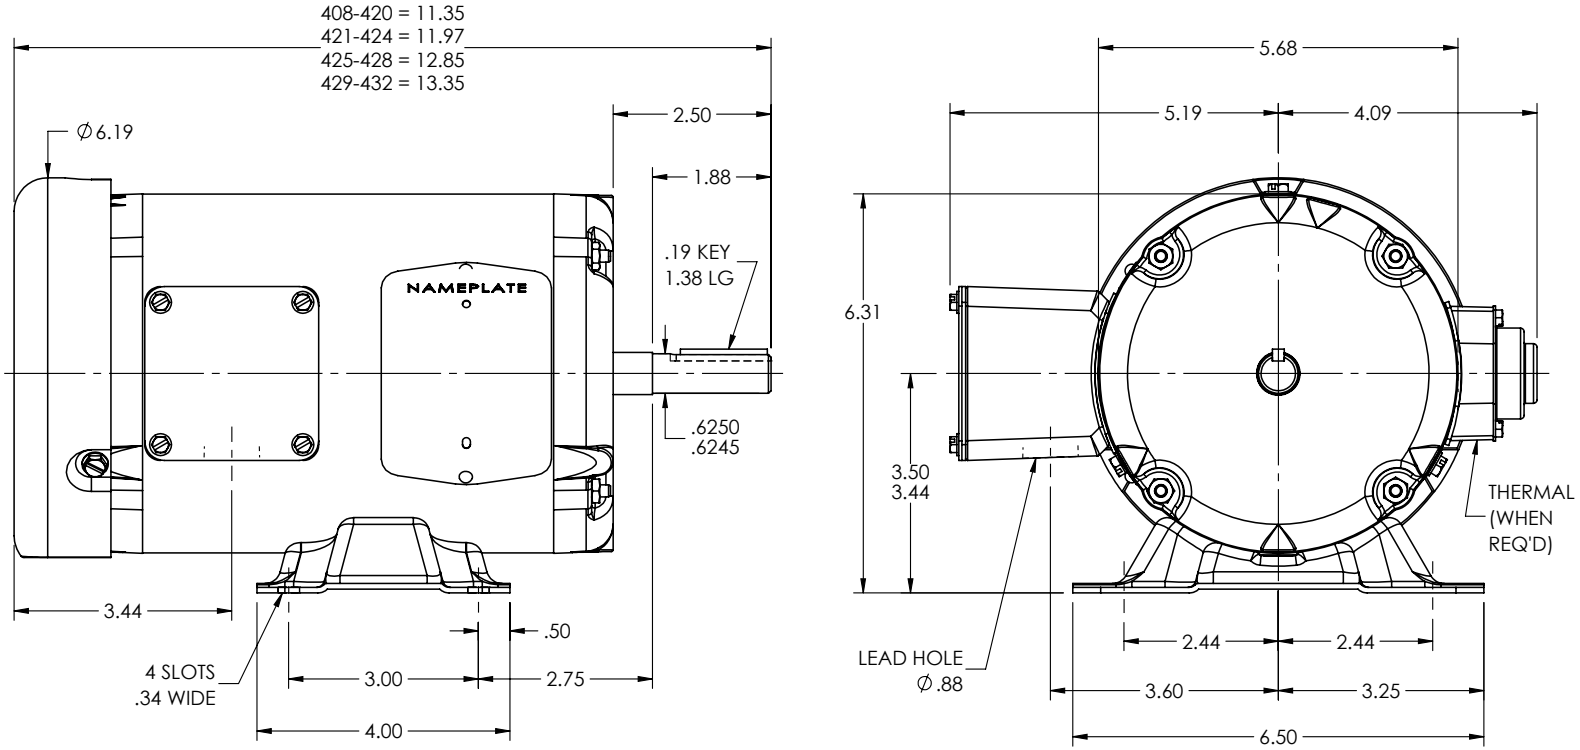

34LYA061

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION

REV. DESC: CLEAN UP DIMENSIONING			
REV: N	VERSION: 06	REVISED: 02:32:44 11/26/2024	TDR: 000001245356
34LYA061	MODEL NO. 34LYA061		REF: -
	BY: ENJEFD0		


BALDOR - RELIANCE®


STD HORZ 34M NEMA 56 TEFC

34LYA061


CD0006

TYPICAL WYE–CONNECTED MOTOR

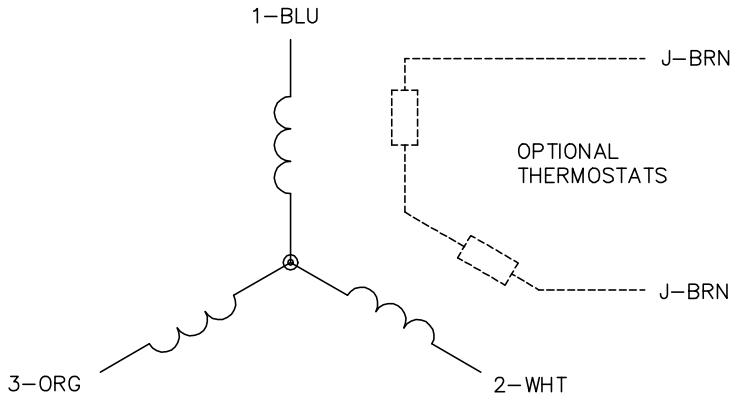



TYPICAL DELTA–CONNECTED MOTOR

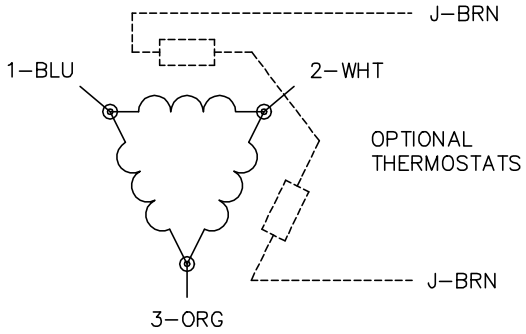

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007			BALDOR - RELIANCE®
REV. LTR: E	VERSION: 01	TDR: 000001099922	
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIR0	3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED
MTL: –			SH 1 of 1