ABB BALDOR RELIANCE

Customer information packet

XM36562T

50HP, 1185RPM, 3PH, 60HZ, 365T, A3668M, TEFC, F
Class - CLI GP D; CLII GP F,G
Division - Division I

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 1:14:18 PM

Specifications

Enclosure	TEFC
Frame	365T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	50.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	CSA
	UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	6-60
Current @ Voltage	124.000 A @ 230.0 V
	132.000 A @ 208.0 V
	62.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	62.0 a
Insulation Class	F
Inverter Code	Inverter Ready

Part Detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG4262
Layout	611742-987
Eff. date	01-22-2026
CD Diagram	416820-002
Poles	06
Leads	3#4,6#6
Proprietary	False
Created date	10-03-2022

KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Max Speed	1800 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A3668M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	33.48 IN
Power Factor	81
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.374 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1185 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Nameplate

NP4017L											
SPEC NO.	A36-8074-4262		**CAT.NO.**	XM36562T					**FRAME SIZE**	365T	
HP	50	**VOLTS**	230/460	**PHASE**	3	**DESIGN**	B	**TYPE**	P		
RPM	1185	**AMPS**	124/62	**HZ**	60	**AMB**	40	**SF**	1.15		
DRIVE END BEARING	65BC03J30X		**DUTY**	CONT		**INSUL CLASS**	F				
OPP D.E. BEARING	65BC03J30X		**ENCL**	TEFC	**CODE**	G					
SINE WAVE SF	1.15	**WK2**	18.71	**MAG CUR**	44/22		**MAX RPM**	1800			
CT HZ	6-60	**VT HZ**	0-60	**CHP HZ**	60-90		**NOM.EFF.**	94.1			
	IP54										
SER.NO.				**MOTOR WEIGHT**	965						

000613006PC			
CLASS I GROUP	D X X	**NO.**	
CLASS II GROUP	F G X		
OPERATING TEMP CODE	T3C		

NP2496L
POLYREX EM

S/O	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	365HP	50	P	3/60	1185	230/460

AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
124/61.9	CONT	40/F	1.15	B	G	TEFC

E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)
-	418141089AE	---	---	.0290/.116

PERFORMANCE

LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY
NO LOAD	0	23.9	1200	5.00	0
1/4	12.5	28.4	1197	45.8	90.1
2/4	25.0	37.2	1194	67.2	93.6
3/4	37.5	48.7	1191	76.4	94.3
4/4	50.0	61.9	1188	80.3	94.2
5/4	62.5	76.1	1185	82.0	93.7

SPEED TORQUE


	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES
LOCKED ROTOR	0	165	365	375
PULL UP	540	147	325	335
BREAKDOWN	1135	253	559	200
FULL LOAD	1188	100	221	61.9

AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

TYPICAL DATA
NEMA NOM. EFF. 94.1 PCT

ABB	DRAWN BY: C.B.ATANGANE CHECKED BY: J. P. TSAO APPROVED BY: W. L. SMITH DATE: 11/12/25	AC MOTOR PERFORMANCE DATA	A36WG4262-R001 DATE ISSUED 11/12/25

FRAME 365HP	RPM 1185	S.F. 1.15	ROTOR 418141089AE
HP 50	VOLTS 230/460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
TYPE P	AMPS 124/61.9	CODE LETTER G	TEST DATE ---
PHASE / HERTZ 3/60	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25°C .0290/.116
	AMB °C / INSUL 40/F	E/S -	OHMS (BETWEEN LINES)

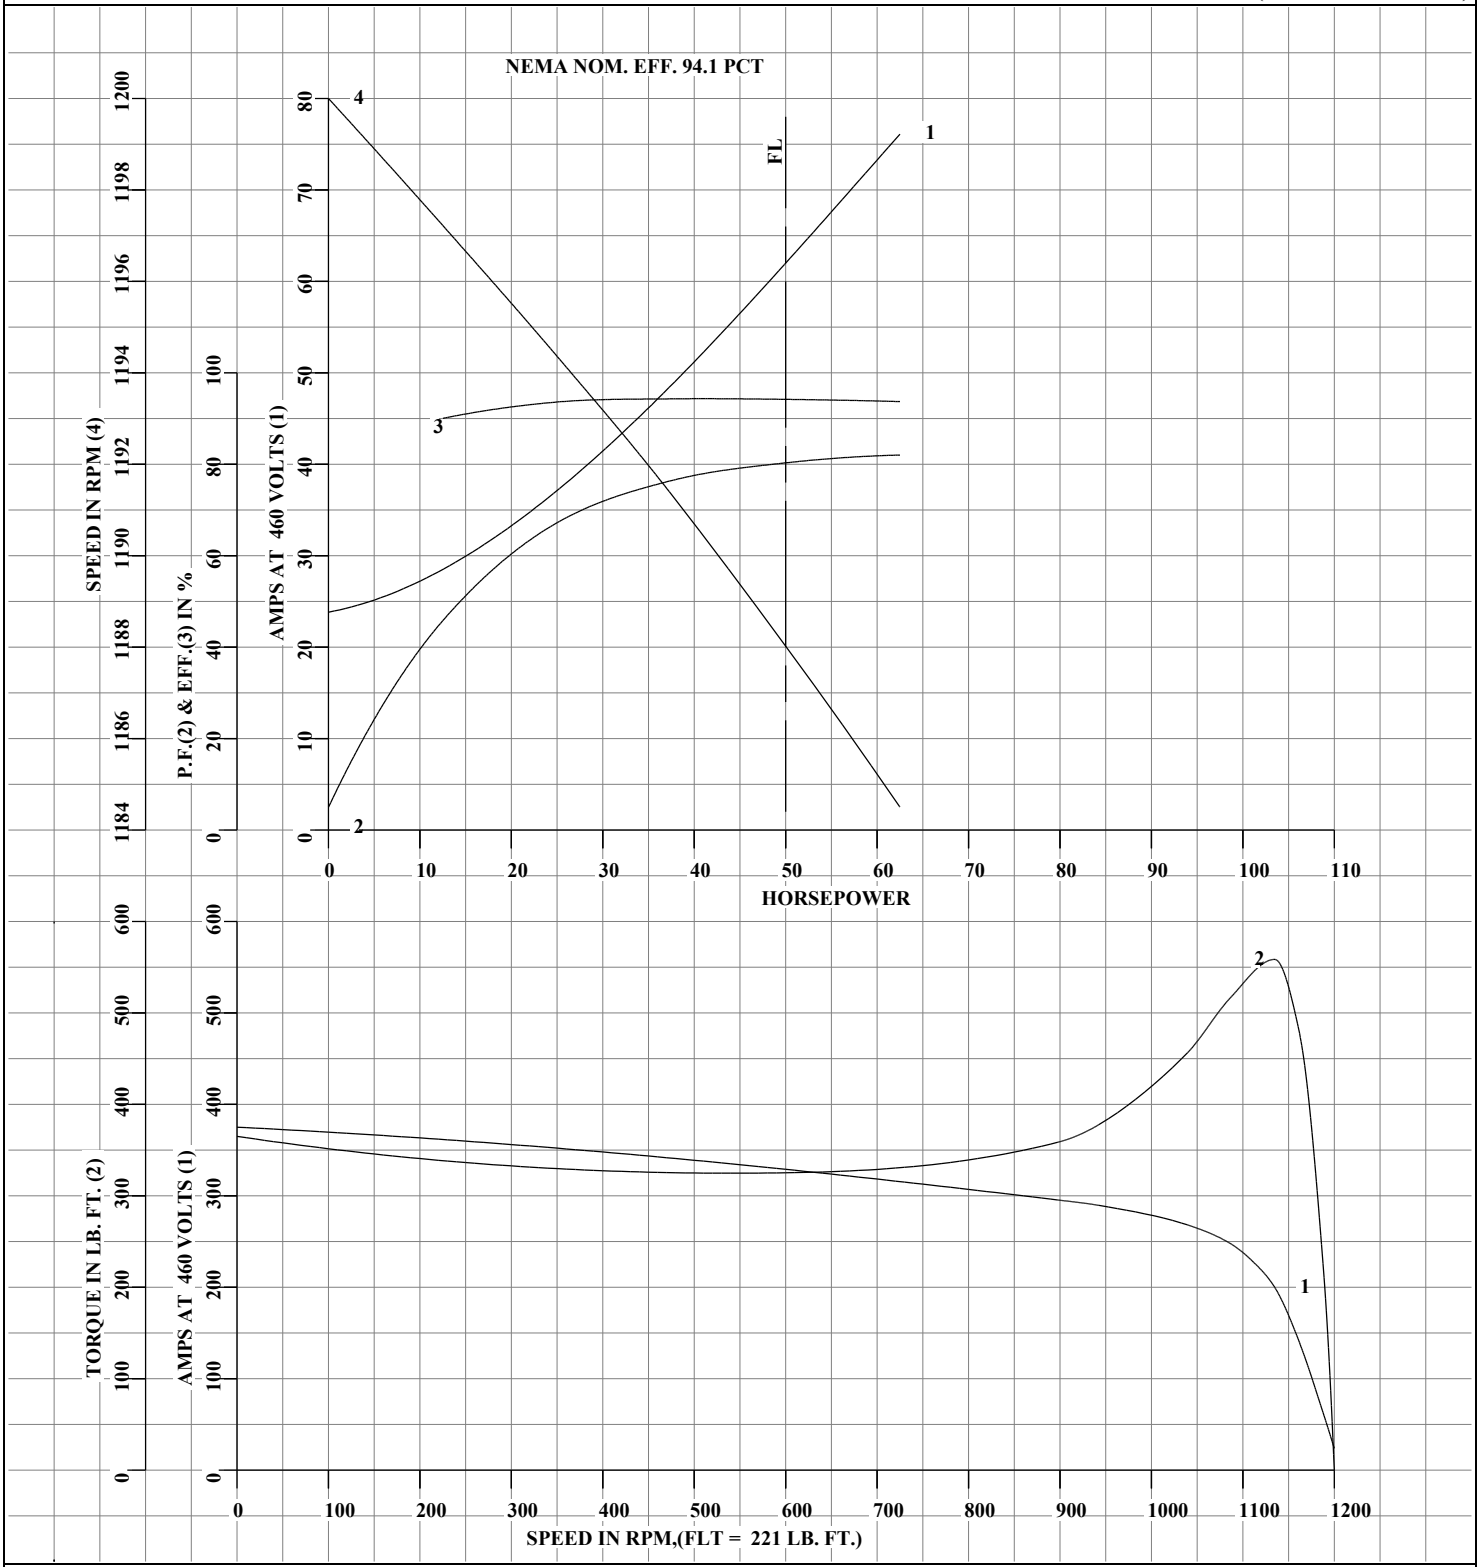

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

ABB	DRAWN BY: C.B.ATANGANE CHECKED BY: J. P. TSAO APPROVED BY: W. L. SMITH DATE: 11/12/25	AC MOTOR PERFORMANCE DATA	A36WG4262-R001 ISSUE DATE 11/12/25

611742-987

ENCLOSURE: TOTALLY ENCLOSED
UNDERWRITER MOTOR


DUTY MASTER ALTERNATING CURRENT MOTORS
SQUIRREL-CAGE INDUCTION


MOUNTING: FOOTLESS, F-1


E364T/E365T


COOLING: FAN COOLED

TACONITE SEALS

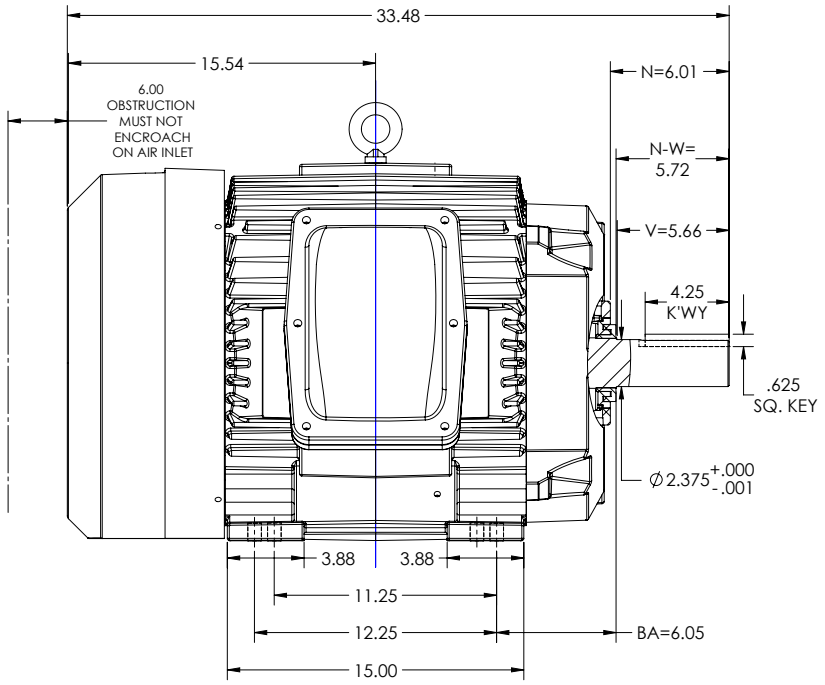

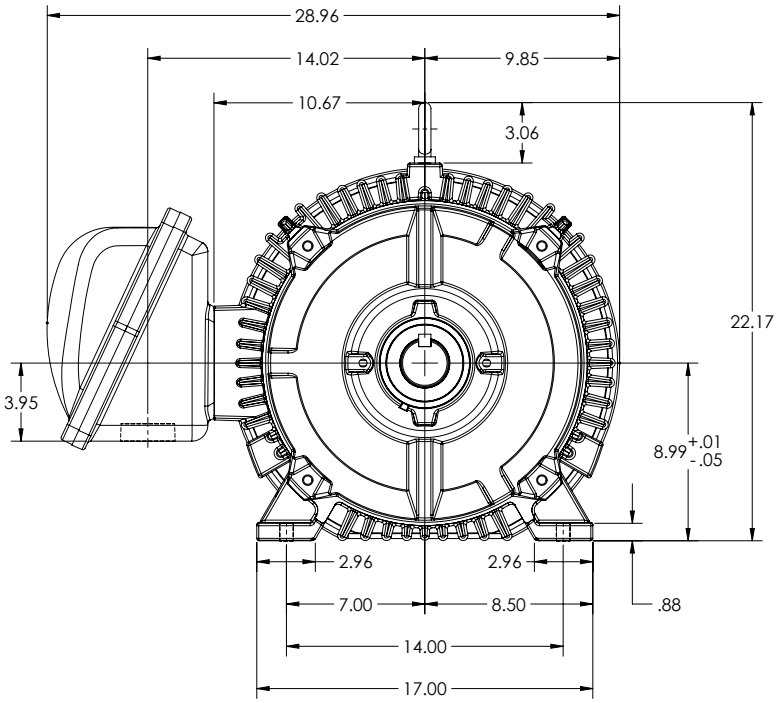

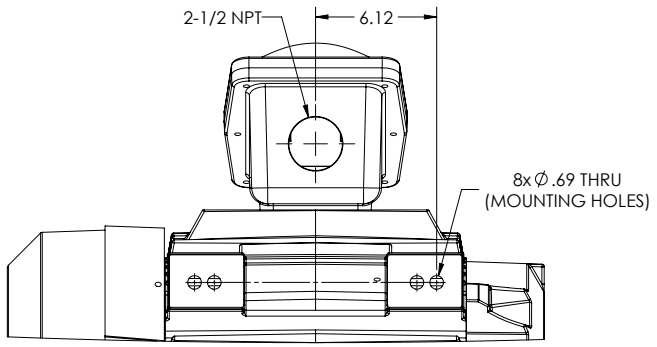

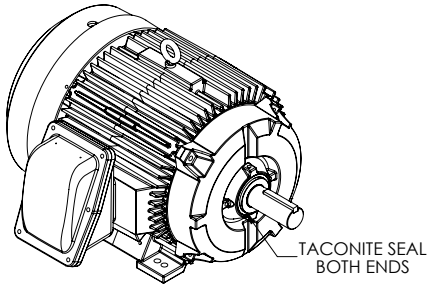

DIMENSIONS ARE IN INCHES.
WEIGHT (LBS) 965, MAY VARY 15% DEPENDING ON THE RATING.
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER
1 OF 1

611742-987


MAX PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF STANDARD SHAFT EXTENSION IS .003" T.I.R.

REV. DESC: NEW DRAWING			
REV: -	VERSION: 00	REVISED: 01:42:40 07/12/2016	TDR: 000000985571
MODEL NO. 611742-987			
BY: USJEDIL			C

BALDOR


E365/4T FCXP FT F1 CI/BOX/DIV. I/CL. I/GRP.D/CL.2/GRP.E,F&G


611742-987

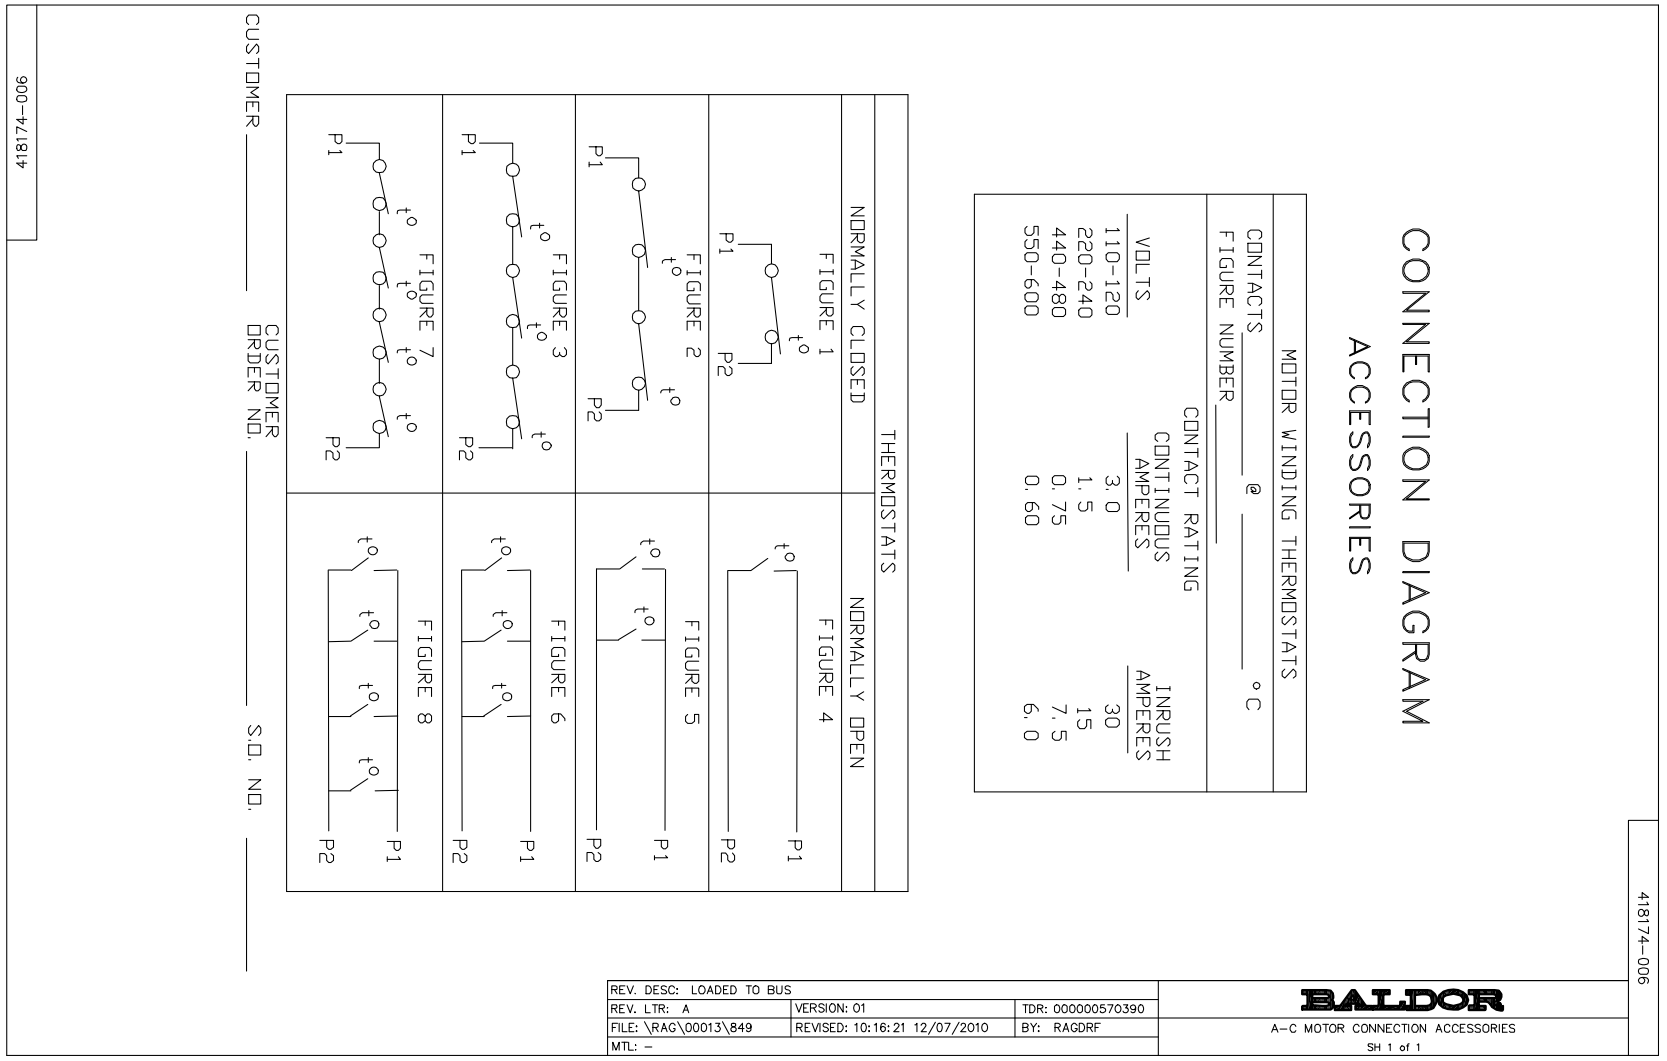
CONNECTION DIAGRAM
ACCESSORIES
418174-006
MOTOR WINDING THERMOSTATS
CONTACTS _____ @ _____ °C
FIGURE NUMBER _____
CONTACT RATING
VOLTS
CONTINUOUS AMPERES
INRUSH AMPERES
110-120 3.0 30
220-240 1.5 15
440-480 0.75 7.5
550-600 0.60 6.0
THERMOSTATS
NORMALLY CLOSED
NORMALLY OPEN
FIGURE 1
FIGURE 2
FIGURE 3
FIGURE 4
FIGURE 5
FIGURE 6
FIGURE 7
FIGURE 8
P1
P2
CUSTOMER _____
CUSTOMER ORDER NO. _____
S.O. NO. _____
418174-006
REV. DESC: LOADED TO BUS
REV. LTR: A
VERSION: 01
TDR: 000000570390
FILE: \RAG\00013\849
REVISED: 10:16:21 12/07/2010
BY: RAGDRF
MTL: -
BALDOR
A-C MOTOR CONNECTION ACCESSORIES
SH 1 of 1

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

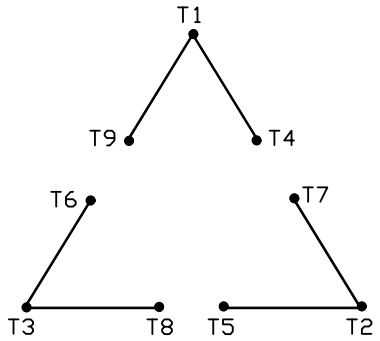

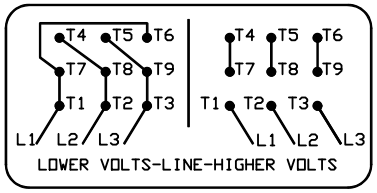

(N. P. 1575-B)

416820-002

REV. DESC: ADJUST TEXT DARKNESS		
REV. LTR: B	VERSION: 02	TDR: 000001285318
FILE: \RAG\00022\453	REVISED: 09:36:26 09/24/2026	BY: USJOSUL
MTL: –		

ABB

CONN DIAG – STANDARD 9 LEAD, DELTA-CONNECTED

SH1 of 1