



Catalog symbol MEQ 0.1-30 A, 500 Vac or less

| Amp ratings | | | | | |
|-------------|-------|------|------|----|--|
| 0.1 | 0.6 | 2.25 | 5.6 | 15 | |
| 0.125 | 0.8 | 2.5 | 6 | 20 | |
| 0.15 | 1 | 3 | 6.25 | 25 | |
| 0.2 | 1.125 | 3.2 | 7 | 30 | |
| 0.25 | 1.25 | 3.5 | 8 | — | |
| 0.3 | 1.5 | 4 | 9 | — | |
| 0.4 | 1.6 | 4.5 | 10 | — | |
| 0.5 | 2 | 5 | 12 | — | |

Specifications

- Time-delay 13/32" x 1-1/2" fuse

Ratings

- Volts 500 Vac
- Amps 0.1-30 A
- Interrupting rating 10 kA RMS Sym.

Agency information

- UL Listed, File E162443, Guide File JDYX
- CSA Certified, LR700489

Benefits

- Compact dimensions.
- Fiber tube construction.
- Time-delay allows harmless inductive surges to pass without needless fuse opening.

Applications

- Supplemental protection of transformers, solenoids, and other high inrush circuits.
- For motor applications, refer to EDCC.

| Cross reference | | |
|-----------------|--------|------------|
| Edison | Mersen | Littelfuse |
| MEQ | ATQ | FLQ |



Catalog symbol MEN 0.1-30 A, 250 Vac or less

| Amp ratings | | | | | |
|-------------|-------|------|------|----|--|
| 0.1 | 0.8 | 2 | 4.5 | 10 | |
| 0.15 | 1 | 2.25 | 5 | 12 | |
| 0.2 | 1.125 | 2.5 | 5.6 | 15 | |
| 0.25 | 1.25 | 2.8 | 6 | 20 | |
| 0.3 | 1.4 | 3 | 6.25 | 25 | |
| 0.4 | 1.5 | 3.2 | 7 | 30 | |
| 0.5 | 1.6 | 3.5 | 8 | — | |
| 0.6 | 1.8 | 4 | 9 | — | |

Specifications

- Time-delay 13/32" x 1-1/2" fuse

Ratings

- Volts 250 Vac
- Amps 0.5-30 A
- Interrupting rating 10 kA RMS Sym. @ 125 Vac

Agency information

- UL Listed, File E162443 ,Guide JDYX (12-30 A)
- CSA Certified, LR700489

Benefits

- Compact dimensions.
- Fiber tube construction.
- Dual-element construction allows harmless inductive surges to pass without opening.

Applications

- Supplemental protection of small motors, transformers, solenoids, and other high inrush power electronic circuits.

| Cross reference | | |
|-----------------|--------|------------|
| Edison | Mersen | Littelfuse |
| MEN | TRM | FLM |



Catalog symbol MID 0.1-6 A (250 Vac), 6.25-15 A (125 Vac), 20-30 A (32 Vac)

| Amp ratings | | | | | |
|-------------|-------|------|------|----|--|
| 0.1 | 1 | 2.25 | 5.6 | 15 | |
| 0.15 | 1.125 | 2.5 | 6 | 20 | |
| 0.2 | 1.25 | 2.8 | 6.25 | 25 | |
| 0.3 | 1.4 | 3 | 7 | 30 | |
| 0.4 | 1.5 | 3.2 | 8 | — | |
| 0.5 | 1.6 | 3.5 | 9 | — | |
| 0.6 | 1.8 | 4 | 10 | — | |
| 0.8 | 2 | 5 | 12 | — | |

Specifications

- Pin indicating, time-delay 13/32" x 1-1/2" fuse, 12-30 A are dual-tube constructions

Ratings

- Volts
 - 250 Vac (0.1-0.8 A)
 - 125 Vac (1-15 A)
 - 32 Vac (20-30 A)
- Amps 0.1-30 A
- Interrupting ratings
 - 10 kA @ 125 Vac (1/10-15 A)
 - 1000 A @ 32 Vac (20-30 A)
 - 35 A @ 250 Vac (1/10-8/10 A)

Agency information

- UL Listed, File E162443, Guide JDYX (1-15 A)
- CSA Certified, LR700489

Benefits

- Compact dimensions.
- Silver-plated pin indicates when fuse is opened. Provides positive electrical signal activation.


Applications

- Supplemental protection for high inrush power electronic circuits.


| Cross reference | | |
|-----------------|--------|------------|
| Edison | Mersen | Littelfuse |
| MID | GFN | FLA |

Time-current curves — average melt

MEQ

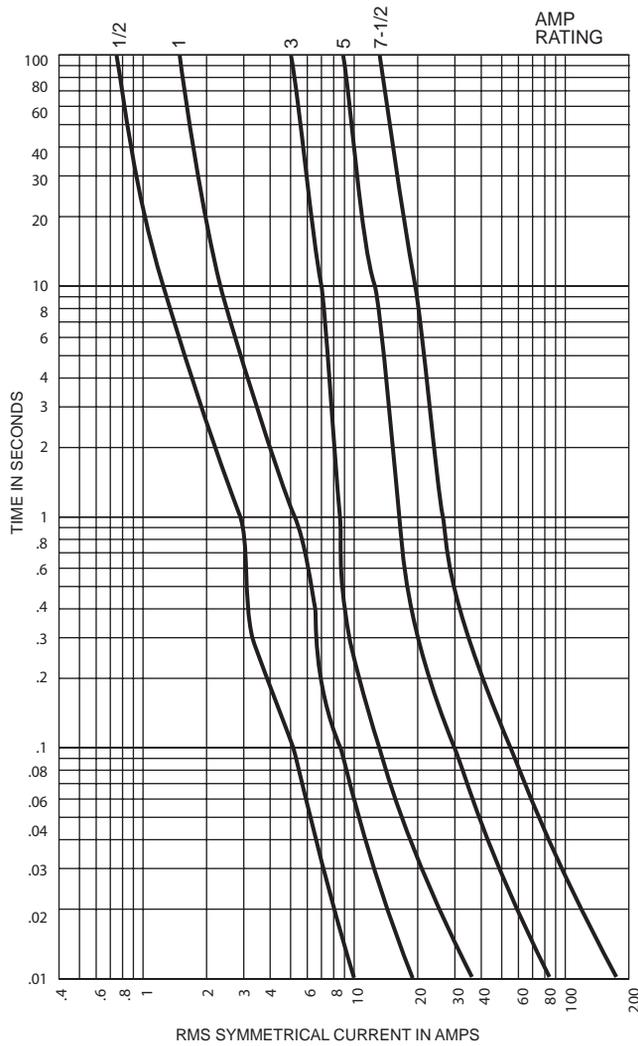

MEN

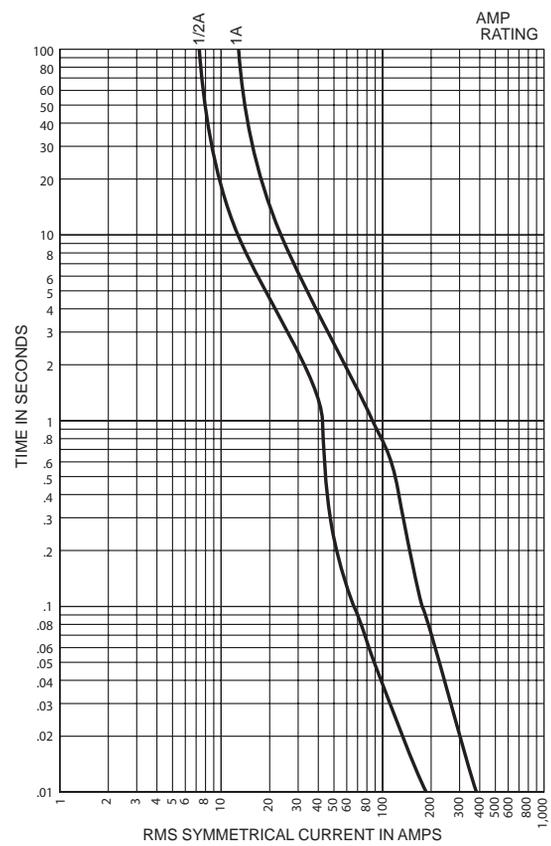

MID

