


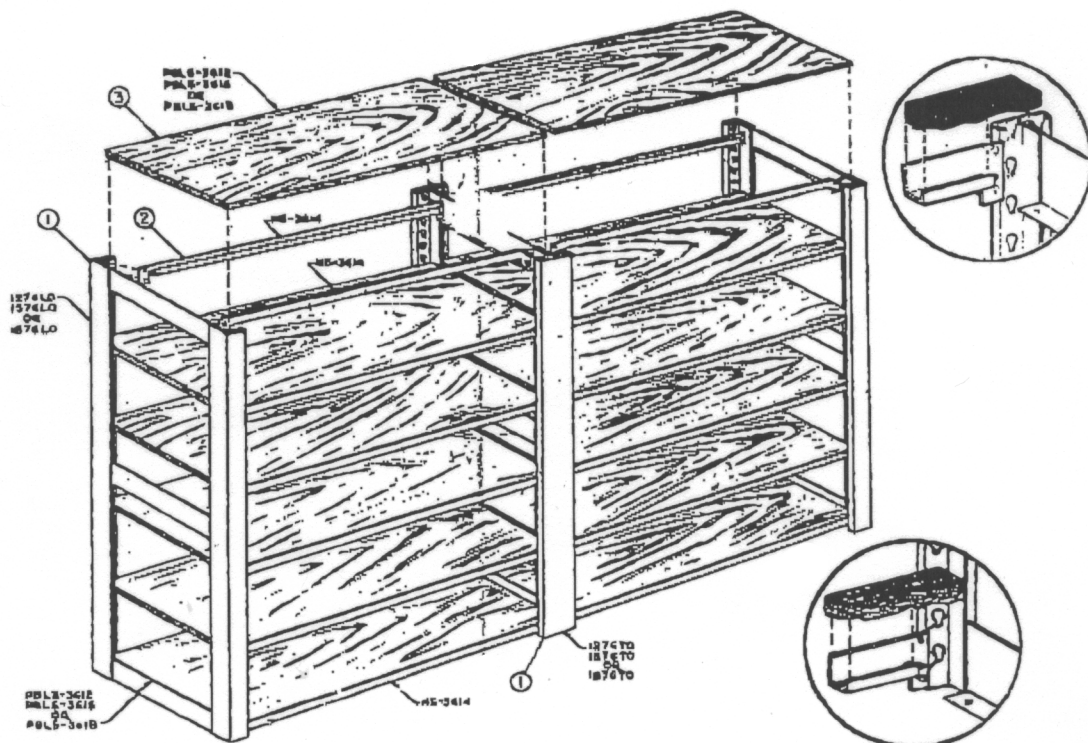

REGAL SHELVING

Assembly Instructions

- (1) Position two uprights (Ref. No. 1) approximately 36 apart. Use two "L" uprights for single units or one "L" and one "T" upright for multiple units. Temporarily place one shelf support (Ref. No. 2) at approximately eye level to properly space uprights.
- (2) Place a shelf support (Ref. No. 2) at rear of unit in bottom two keyslots with tabs turned downward (see enlarged view). Place a second shelf support at bottom front of unit. Place a shelf (Ref. No. 3) over supports.
- (3) Continue assembly by placing supports and shelves as described in step 2. Recommended space between shelves is fifteen inches (eight open slots between supports).
- (4) Top shelf (Ref. No. 3) should be installed flush with upright top.
- (5) Add extra section by using keyslots on common "T" uprights. Follow same assembly procedure as described above.

tennsco

P.O. BOX 604 • Dalton, Tennessee 37003

REGAL SHELVING PACKING LIST

Item No.	Description	Part No.	STARTER UNITS 5 Openings			ADD-ON UNITS 5 Openings		
			REL-1236S 36w x 12d x 76h Qty.	REL-1536S 36w x 15d x 76h Qty.	REL-1836S 36w x 18d x 76h Qty.	REL-1236A 36w x 12d x 76h Qty.	REL-1536A 36w x 15d x 76h Qty.	REL-1836A 36w x 18d x 76h Qty.
1	Upright	1276LO	2	-	-	-	-	-
		1276TO	-	-	-	1	-	-
		1576LO	-	2	-	-	-	-
		1576TO	-	-	-	-	1	-
		1876LO	-	-	2	-	-	-
		1876TO	-	-	-	-	-	1
2	Shelf Support	HS-3614	12	12	12	12	12	12
3	Shelf	PRLS-3612	6	-	-	6	-	-
		PRLS-3615	-	6	-	-	6	-
		PRLS-3618	-	-	6	-	-	6