


**UPS INTERFACE MODULE**

**PSMN2C2RB10**

2.75" Track Mount Power Control Center, with 10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input. (Status Contacts)

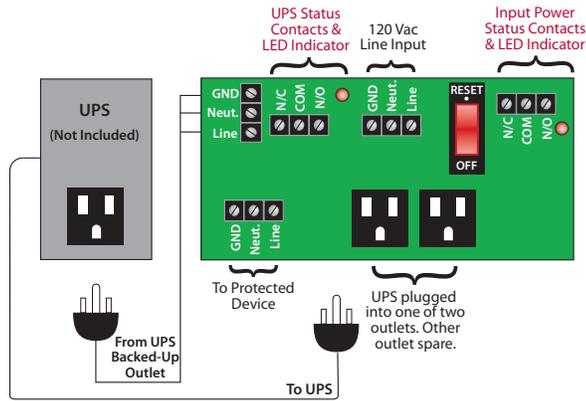

**BUY SEPARATELY AND PLACE IN AN ENCLOSURE OF YOUR CHOICE**

**SPECIFICATIONS**

**Operating Temperature:** -30 to 140° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Main Breaker ON/OFF:** Switch / Breaker (10 Amp)  
**Dimensions:** 2.750" x 6.655" x 1.750"  
**Track Mount:** 2.750" x 6.000"  
 MT212-6N Mounting Track Included  
**Approvals:** UL Listed, UL916, C-UL, CE, RoHS

**Line Input Status Contacts and UPS Output Status Contacts Rated:**  
 10 Amp @ 277 Vac General Use  
 10 Amp @ 30 Vdc N/O  
 7 Amp @ 30 Vdc N/C  
 1/2 HP @ 125 Vac  
 1/4 HP @ 277 Vac  
 100 VA @ 120 Vac Ballast N/C  
 C300 Pilot Duty  
 16.8 VA @ 24 Vac Pilot Duty

**Notes:**  
 • Circuit breaker for short-circuit protection.  
 • 14/3 Line Cord included (3').  
 • Use with UPS devices rated 1000 VA or less.  
 • UPS is not included.

**Input Power Status Contacts and LED Indicator**  
 The input power status contacts and LED indicate the presence of normal power. When normal power is present, the relay is energized, and the LED is on. When normal power is lost, the relay is de-energized, and the LED is off.

**UPS Status Contacts and LED Indicator**  
 The UPS status contacts and LED indicate power from the UPS. When normal power is present, the relay is energized, and the LED is on. When normal power is lost, the relay will be energized as long as the UPS can sustain it (until the UPS battery is depleted), and the LED is on.