



## **BG-UHD-KVM21A**


**2X1 KVM Switcher with USB2.0 Ports for Peripherals and 3.5mm Jacks for Audio Support**

BG-UHD-KVM21A is a 4K HDMI USB 2.0 KVM switch. With support for resolutions up to 4K@60Hz, it allows users to control two computers and share USB peripherals from a single workstation. Perfect for offices, software programmers, and technical support desks, users can easily switch between multiple operating systems without leaving their seat.

The rear panel of the BG-UHD-KVM21A is equipped with two PC connections, each including one USB 2.0 type-B host port and one HDMI 1.4 input. There is also one HDMI 1.4 output for connection to a monitor.

### **FEATURES**

- Supports resolutions up to 4K@60Hz
- Remotely control 2 computers from a single screen
- HDMI 1.4 & HDCP compliant
- Conveniently share 2 x USB 2.0 peripherals
- Stereo audio de-embedding via 3.5mm jack
- Connect a microphone for videoconferencing
- Share an HDTV or display, USB keyboard & mouse, and microphone between 2 USB/HDMI computers and devices
- Supports PC's UXGA 1920x1200 resolutions
- Video bandwidth: up to 3Gbps
- Supports Dolby True HD and DTS HD Master Audio formats
- Switch between devices via front push button or hotkey

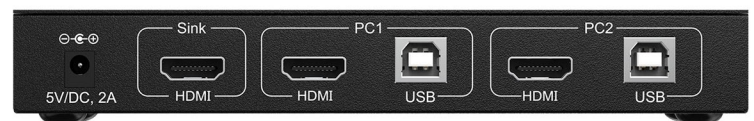

# Specifications

Supports resolutions: Up to 4K@60Hz

Input Ports: 2 HDMI, 2 USB 2.0 Host, 3 USB 2.0 Peripheral, 1 analog audio

Output Ports: 1 HDMI, 1 Analog Audio

Control: Panel Buttons

Power Supply: AC 100 - 240V 50/60Hz

Weight: 9.1oz [258g]

Dimensions: 6.15"(W) x 2.7"(D) x 1"(H); 156mm (W) x 69mm (D) x 25mm (H)

Housing: Metal Enclosure



## Industry-Leading Warranty & Support

BZBGEAR Pro AV products and Cameras come with a three-year warranty. An extended two-year warranty is available for our Cameras upon registration for a total of five years.

We pride ourselves in our Customer Service and seven-days-a-week Tech Support.

