


AMP SMA

TE Internal #: 1054881-1 TE Internal Description: 2084 1900 02 View on TE.com >



Connectors > RF Coax Connectors > RF Adapters > In-Series Adapters

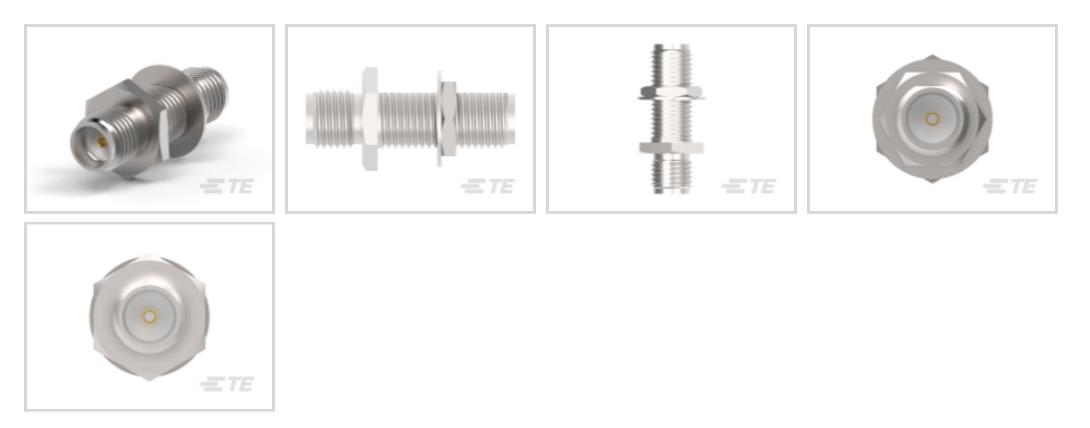

RF Interface: SMA

Body Orientation: Straight

RF Connector Center Contact Material: Beryllium Copper

RF Connector Center Contact Plating Material: Gold over Copper

Impedance: 50Ω

Features

Product Type Features

| Grounding Options | None |
|--|------------------|
| RF Interface | SMA |
| Connector System | Cable-to-Cable |
| Sealable | No |
| Connector & Contact Terminates To | Wire & Cable |
| Configuration Features | |
| Number of Positions | 1 |
| Electrical Characteristics | |
| Impedance | 50 Ω |
| Body Features | |
| Body Plating Finish | Passivated |
| Body Material | Stainless Steel |
| Contact Features | |
| RF Connector Center Contact Material | Beryllium Copper |
| RF Connector Center Contact Plating Material | Gold over Copper |



Mechanical Attachment

| Panel Attachment Style | Front Mount, Rear Mount | |
|-----------------------------|----------------------------|--|
| Panel Mount Feature Type | Bulkhead | |
| Connector Mounting Type | Panel Mount | |
| Housing Features | | |
| Body Orientation | Straight | |
| Dimensions | | |
| Product Length | 22.2 mm[.874 in] | |
| Usage Conditions | | |
| Insulation Option | Uninsulated | |
| Operating Temperature Range | -65 – 165 °C[-85 – 329 °F] | |
| Operation/Application | | |
| Operating Frequency | 18 GHz | |
| Circuit Application | Power & Signal | |
| Packaging Features | | |
| Packaging Method | Package | |

Other

| Die | lectric | Mate | eria |
|-----|---------|--------|------|
| | | IVICIC | 110 |

TFE Fluorocarbon

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant with Exemptions | |
|---|---|--|
| EU ELV Directive 2000/53/EC | Compliant with Exemptions | |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold | |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (.6% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. | |
| Halogen Content | Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free | |



Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | AMP SMA



| | | 0 | |
|------------------------------------|------------------------|--------------------------|---------------------------|
| Rack & Panel Ferrules & Inserts(1) | RF Cable Assemblies(2) | RF Connector Hardware(2) | RF Connector Launchers(8) |

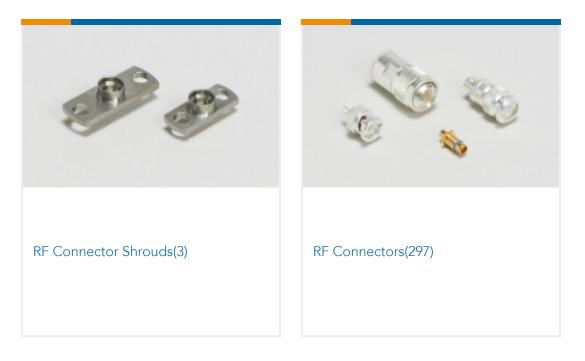

Documents

Product Drawings 2084 1900 02

C For support call+1 800 522 6752

1054881-1

2084 1900 02



English 2084 1900 02 English CAD Files 3D PDF 3D Customer View Model ENG_CVM_CVM_1054881-1_A.2d_dxf.zip English Customer View Model ENG_CVM_CVM_1054881-1_A.3d_igs.zip English Customer View Model ENG_CVM_CVM_1054881-1_A.3d_stp.zip English By downloading the CAD file I accept and agree to the Terms and Conditions of use **Product Specifications Product Specification**

English

Product Specification

English