ABB BALDOR RELIANCE

Customer information packet

M3555T

2HP, 3450RPM, 3PH, 60HZ, 145T, 3526M, TEFC, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 11:59:06 AM

Specifications

Enclosure	TEFC
Frame	145T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
	230.0 V @ 60 HZ
	208.0 V @ 60 HZ
Agency Approvals	CSA
	UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.600 A @ 208.0 V
	5.200 A @ 230.0 V
	2.600 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	84.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	H
Type	AC
Mech. spec.	35T638
Base	
Status	NLA/A
Elec. spec.	35WGT962
Layout	35LYT638
Eff. date	12-15-2008
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	06-22-2007

Heater Indicator	No Heater
High Voltage Full Load Amps	2.6 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3526M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	13.31 IN
Power Factor	88
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M3555T								
SPEC.	35T638T962H1								
HP	2								
VOLTS	208-230/460								
AMP	5.6-5.2/2.6								
RPM	3450								
FRAME	145T	**HZ**	60			**PH**	3		
SER.F.	1.15	**CODE**	L	**DES**	B	**CLASS**	B		
NEMA-NOM-EFF	84	**PF**	88						
RATING	40C AMB-CONT								
CC	010A								
DE	6205	**ODE**	6203						
ENCL	TEFC	**SN**							

Accessories

Part number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data
Record # 9718
Typical performance - not guaranteed values

Winding: 35WGT962-R001	**Type:** 3526M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			2	**Full Load Torque**	3 LB-FT
Volts			208-230/460	**Start Configuration**	direct on line
Full Load Amps			5.6-5.2/2.6	**Breakdown Torque**	12.4 LB-FT
R.P.M.			3450	**Pull-up Torque**	7.6 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	11 LB-FT
NEMA Design Code	B	**KVA Code**	L	**Starting Current**	24.3 A
Service Factor (S.F.)			1.15	**No-load Current**	1.1 A
NEMA Nom. Eff.	84	**Power Factor**	88	**Line-line Res. @ 25ºC**	7.86 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	47°C
S.F. Amps				**Temp. Rise @ S.F. Load**	55°C
				Locked-rotor Power Factor	54
				Rotor inertia	0.0712 LB-FT2

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	50	73	80	85	89	89	87
Efficiency	72.7	81.2	83.8	84.2	83.7	82.6	83.9
Speed	3563	3537	3507	3475	3440	3402	3454
Line amperes	1.3	1.6	2.1	2.6	3.1	3.7	2.9


ABB Motors and Mechanical Inc.

WINDING # 35WGT962

2 HP 3 PH 60 HZ 3450 RPM 460 V 3526M

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=12.4 PU=7.6 LR=11 LRA=24.3

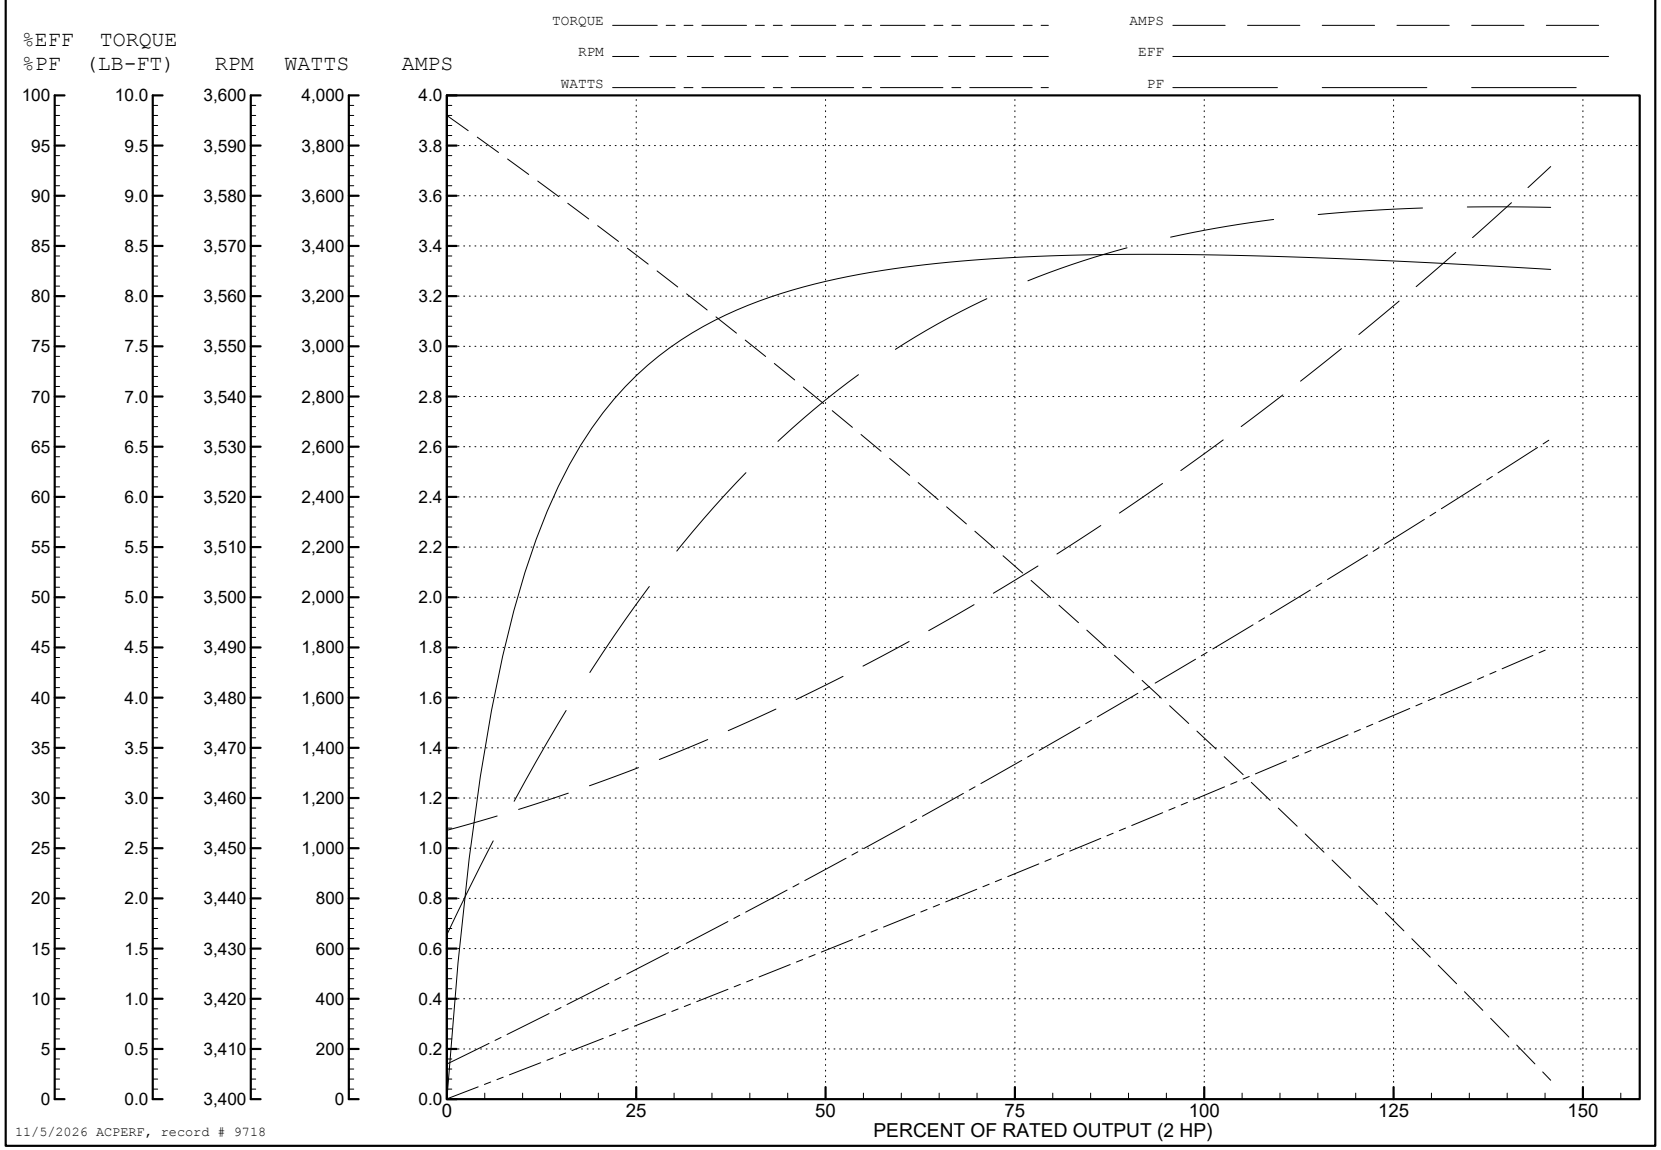

AC Induction Motor Performance Data
Record # 20594
Typical performance - not guaranteed values

Winding: 35WGT962-R008	**Type:** 3526M	**Enclosure:** TEFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			2	**Full Load Torque**	3 LB-FT
Volts			208-230/460	**Start Configuration**	direct on line
Full Load Amps			5.6-5.2/2.6	**Breakdown Torque**	12.4 LB-FT
R.P.M.			3450	**Pull-up Torque**	7.6 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	11 LB-FT
NEMA Design Code	B	**KVA Code**	L	**Starting Current**	24.3 A
Service Factor (S.F.)			1.15	**No-load Current**	1.1 A
NEMA Nom. Eff.	84	**Power Factor**	88	**Line-line Res. @ 25ºC**	7.86 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	47°C
S.F. Amps				**Temp. Rise @ S.F. Load**	55°C
				Locked-rotor Power Factor	54
				Rotor inertia	0.0712 LB-FT2

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	50	73	80	85	89	89	87
Efficiency	72.7	81.2	83.8	84.2	83.7	82.6	83.9
Speed	3563	3537	3507	3475	3440	3402	3454
Line amperes	1.3	1.6	2.1	2.6	3.1	3.7	2.9


ABB Motors and Mechanical Inc.


WINDING # 35WGT962

2 HP 3 PH 60 HZ 3450 RPM 460 V 3526M


Typical performance - not guaranteed values.


TORQUES(LB-FT): PO=12.4 PU=7.6 LR=11 LRA=24.3

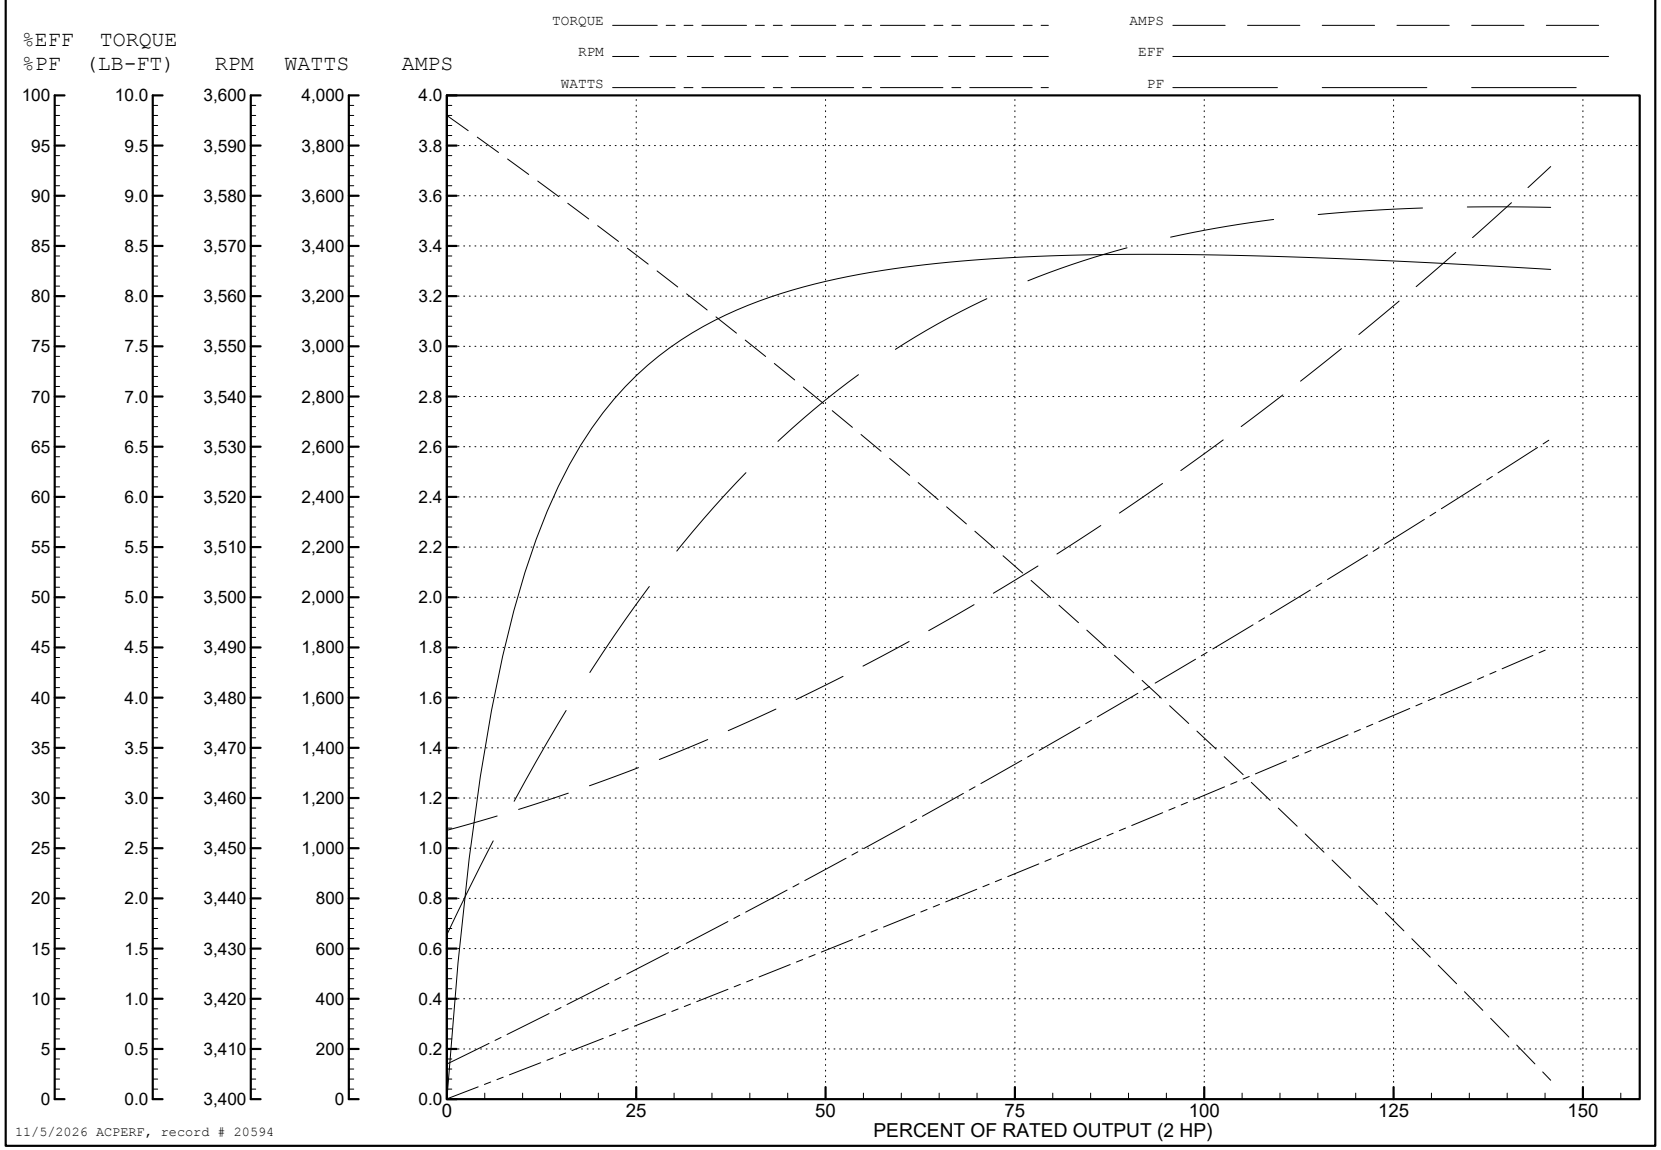

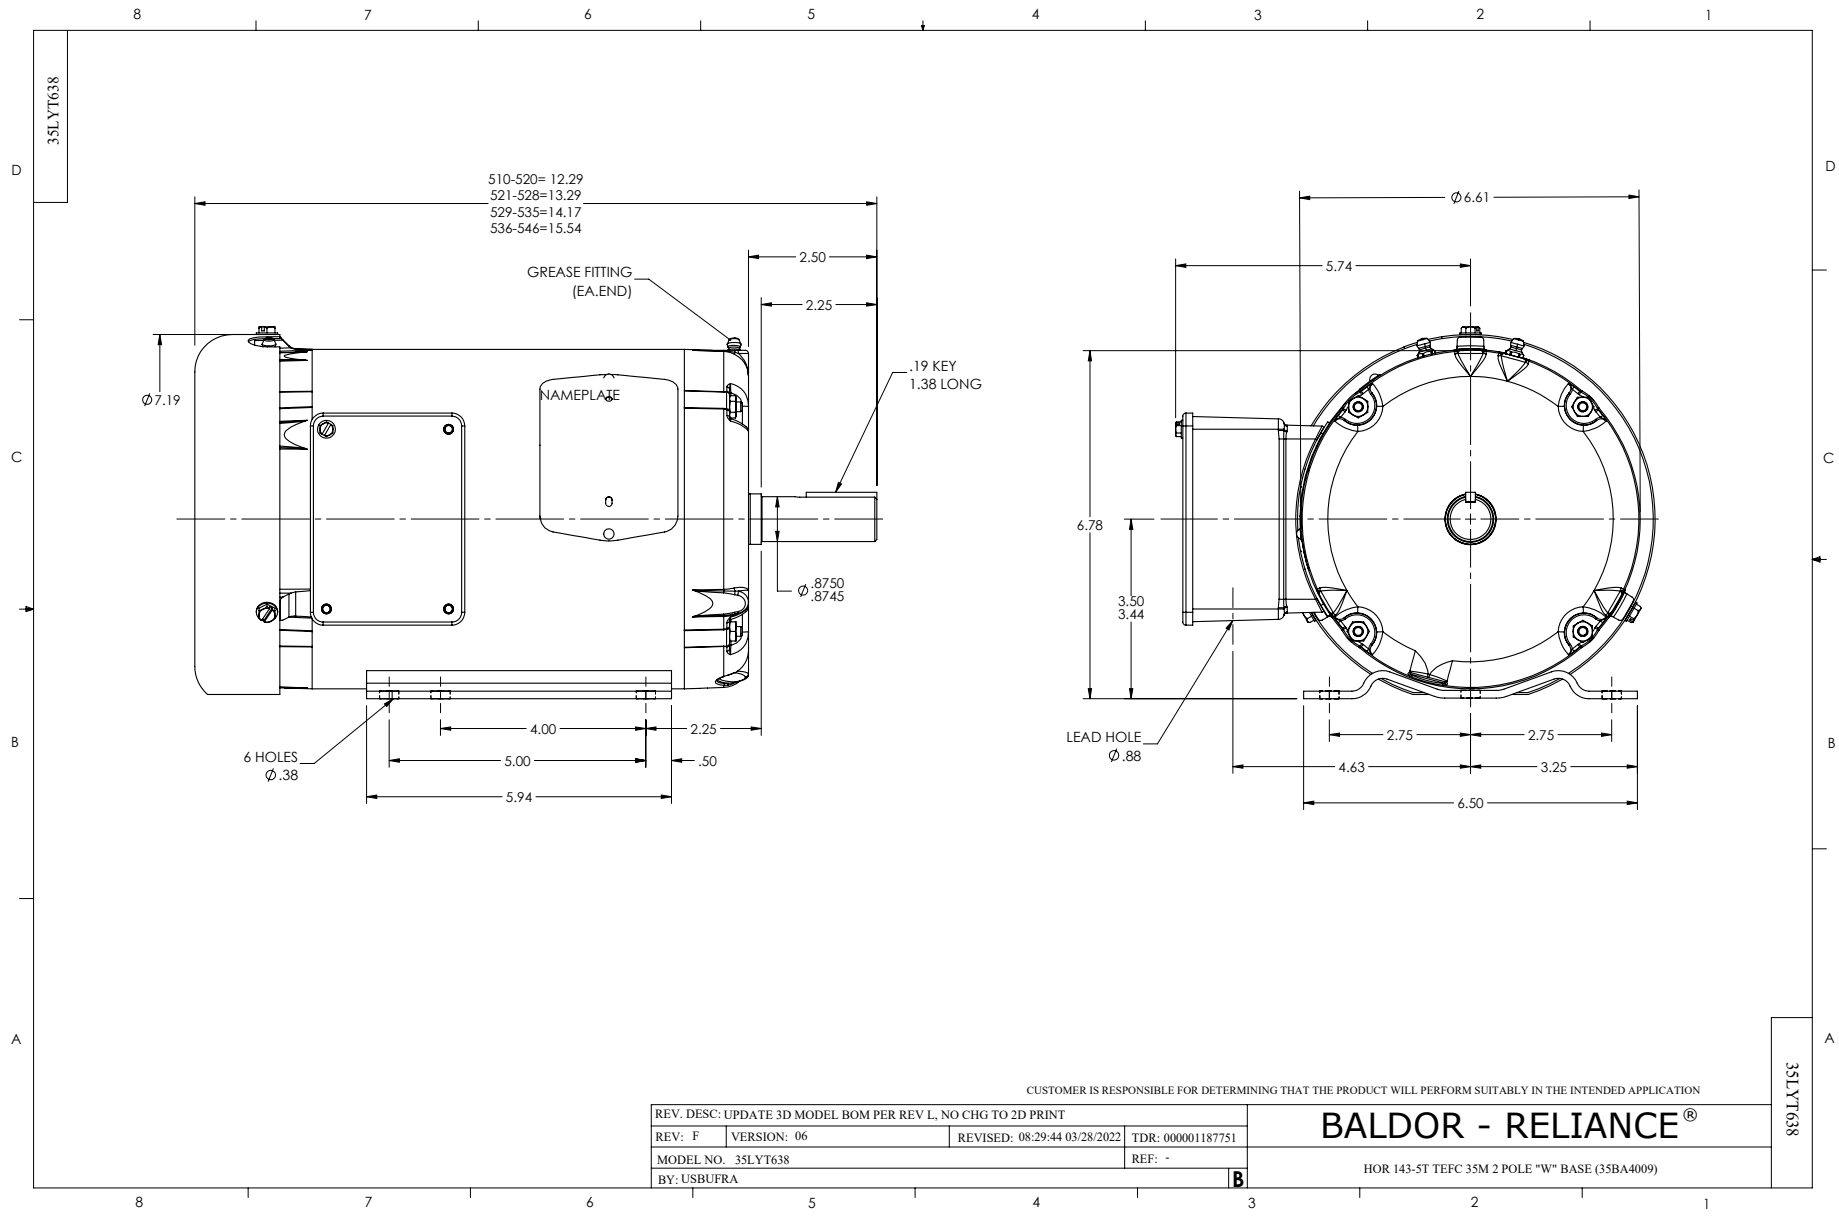
35LYT638
510-520= 12.29
521-528=13.29
529-535=14.17
536-546=15.54
2.50
2.25
GREASE FITTING
(EA.END)
.19 KEY
1.38 LONG
Ø7.19
NAMEPLATE
Ø .8750
Ø .8745
4.00
2.25
6 HOLES
Ø .38
5.00
.50
5.94
Ø6.61
5.74
6.78
3.50
3.44
LEAD HOLE
Ø .88
2.75
2.75
4.63
3.25
6.50
CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION
REV. DESC: UPDATE 3D MODEL BOM PER REV L, NO CHG TO 2D PRINT
REV: F
VERSION: 06
REVISED: 08:29:44 03/28/2022
TDR: 000001187751
MODEL NO. 35LYT638
REF: -
BY: USBUFRA
B
BALDOR - RELIANCE®
HOR 143-5T TEFC 35M 2 POLE "W" BASE (35BA4009)
35LYT638

CD0005

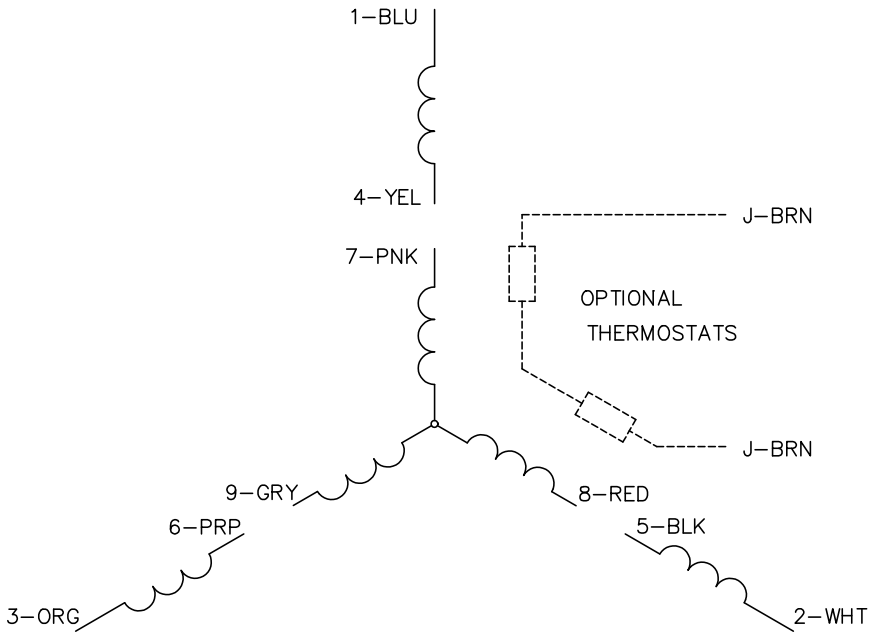

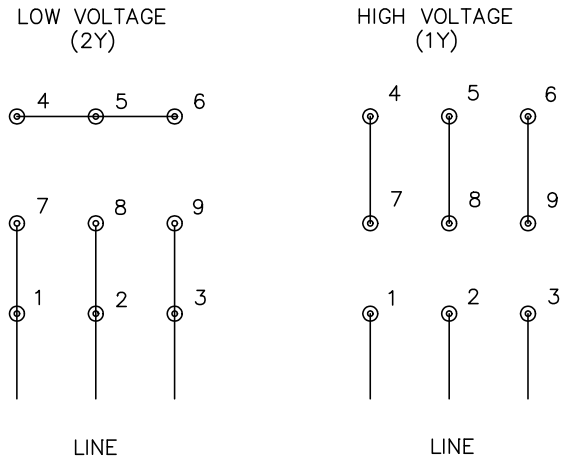

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS