ABB BALDOR RELIANCE

Customer information packet

M3457

.33HP, 3450RPM, 3PH, 60HZ, 48, 3410M, TENV, F1
Class - None
Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
11/5/2026 4:30:58 PM

Specifications

Enclosure	TENV
Frame	48
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.700 A @ 460.0 V
	1.400 A @ 230.0 V
	1.600 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	72.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	0.7 a

Part Detail

Revision	R
Type	AC
Mech. spec.	34A075
Base	
Status	PRD/A
Elec. spec.	34WGY170
Layout	34LYA075
Eff. date	06-19-2025
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	01-01-0001

Insulation Class	B
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	P
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3410M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	9.62 IN
Power Factor	64
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.35
Shaft Diameter	0.500 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M3457								
SPEC.	34A075Y170								
HP	.33								
VOLTS	230/460								
AMP	1.4/.7								
RPM	3450								
FRAME	48	**HZ**	60			**PH**	3		
SER.F.	1.35	**CODE**	P	**DES**	B	**CLASS**	B		
NEMA-NOM-EFF	72	**PF**	64						
RATING	40C AMB-CONT								
CC									
DE	6203	**ODE**	6203						
ENCL	TENV	**SN**							
	SFA 1.5/.75								

Accessories

Part number	Description	Multiplier
34-3900T	C-FACE KIT	A8


AC Induction Motor Performance Data
Record # 28270
Preliminary Data Sheet

Winding: 34WGY170-R001	**Type:** 3410M	**Enclosure:** TENV


Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			.33	**Full Load Torque**	0.5 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			1.4/.7	**Breakdown Torque**	3.4 LB-FT
R.P.M.			3450	**Pull-up Torque**	2.4 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	2.6 LB-FT
NEMA Design Code	B	**KVA Code**	P	**Starting Current**	5.8 A
Service Factor (S.F.)			1.35	**No-load Current**	0.56 A
NEMA Nom. Eff.	72	**Power Factor**	64	**Line-line Res. @ 25ºC**	31.7 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	57°C
S.F. Amps			1.5/.75	**Temp. Rise @ S.F. Load**	66°C

Load Characteristics 460 V, 60 Hz, 0.33 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**	**S.F.**
Power Factor	32	42	55	63	73	77	75
Efficiency	43.7	62	68.3	72.8	74.4	75.8	75
Speed	3569	3544	3526	3497	3477	3444	3464
Line amperes	0.57	0.6	0.63	0.68	0.71	0.79	0.742

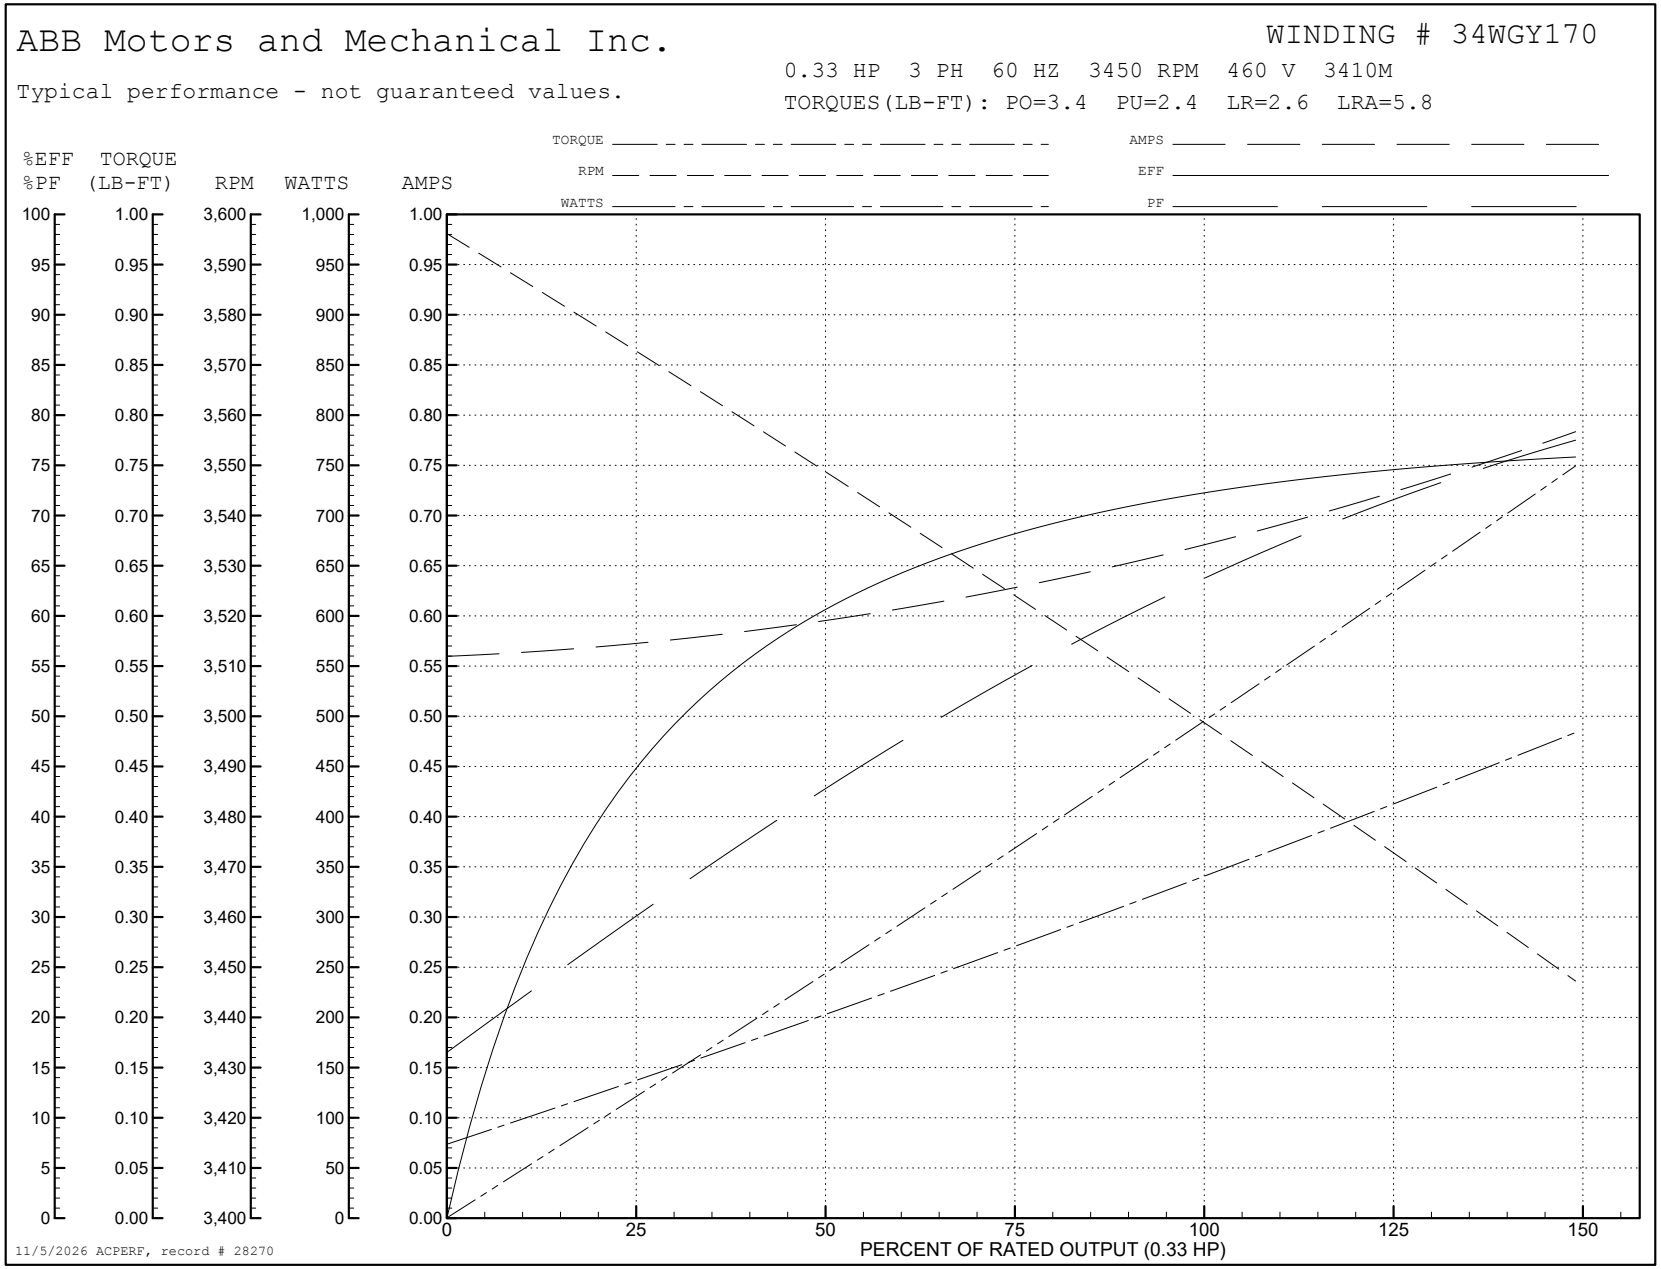
ABB Motors and Mechanical Inc.
WINDING # 34WGY170
0.33 HP 3 PH 60 HZ 3450 RPM 460 V 3410M
Typical performance - not guaranteed values.
TORQUES(LB-FT): PO=3.4 PU=2.4 LR=2.6 LRA=5.8
TORQUE
RPM
WATTS
AMPS
EFF
PF
%EFF %PF
TORQUE (LB-FT)
RPM
WATTS
AMPS
PERCENT OF RATED OUTPUT (0.33 HP)
11/5/2026 ACPERF, record # 28270

34LYA075

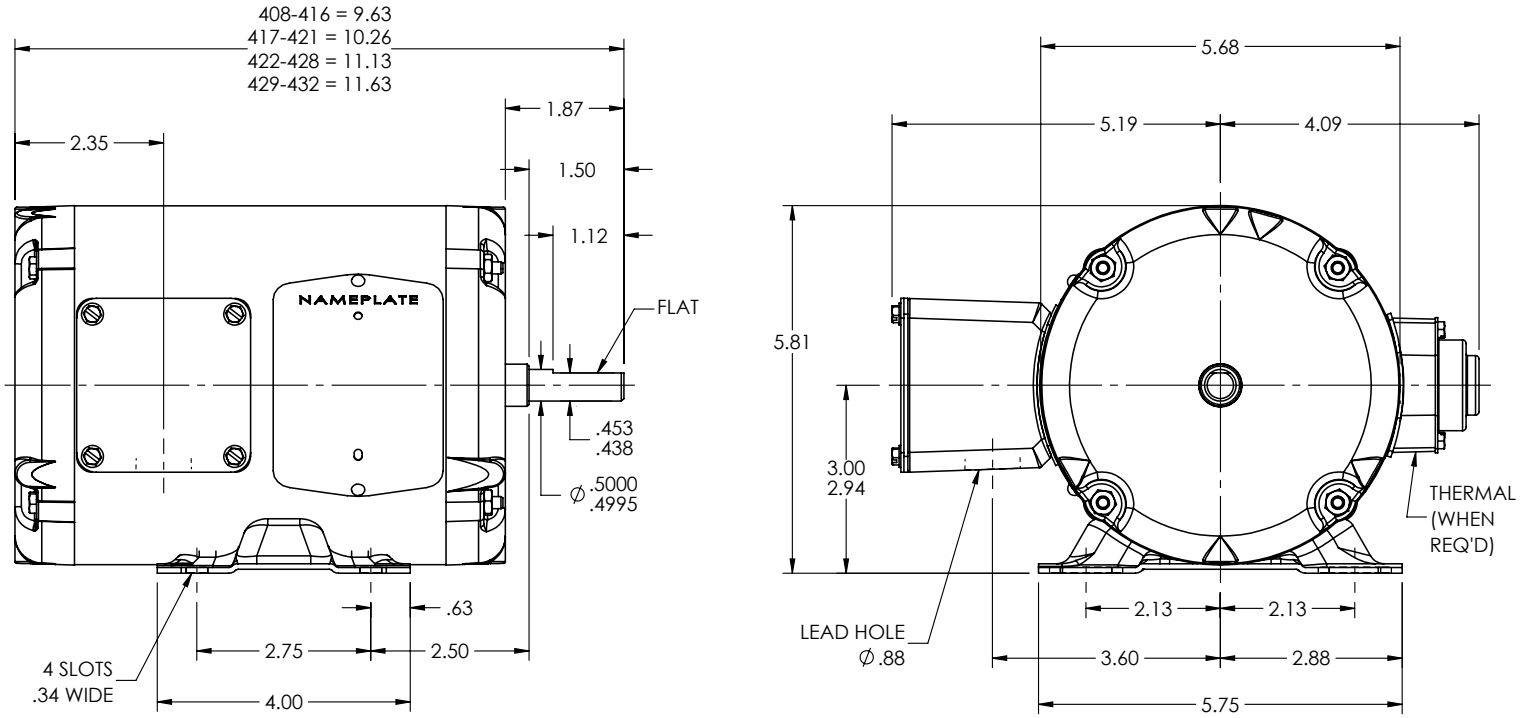

34LYA075


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT THE PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION


REV. DESC: UPDATE DIMENSION GRAPHICS			
REV: F	VERSION: 04	REVISED: 03:24:03 11/26/2024	TDR: 000001245356
34LYA075	MODEL NO. 34LYA075		REF: -
	BY: ENJEFD0		

BALDOR - RELIANCE®

STD HORZ MODEL 34M NEMA 48 TENV

CD0005

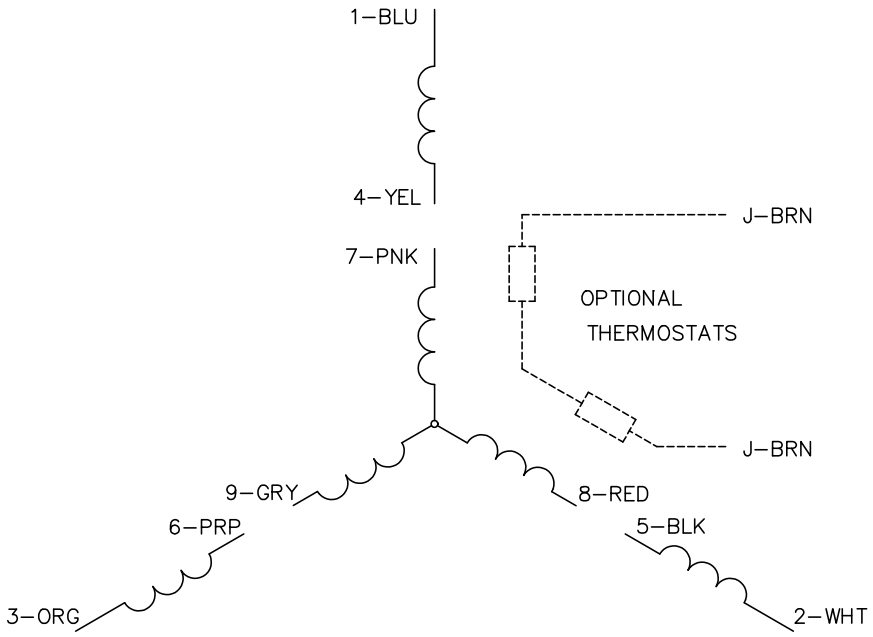

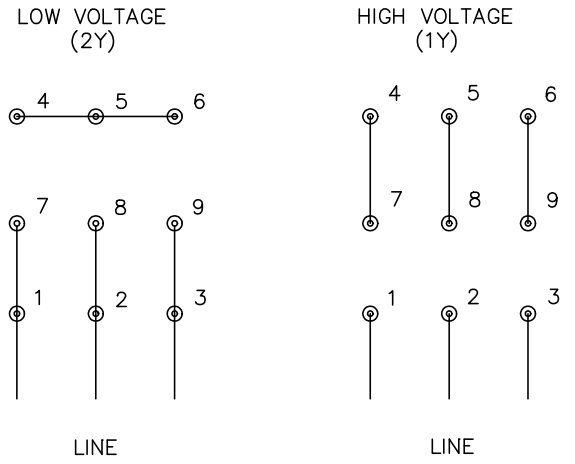

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS