
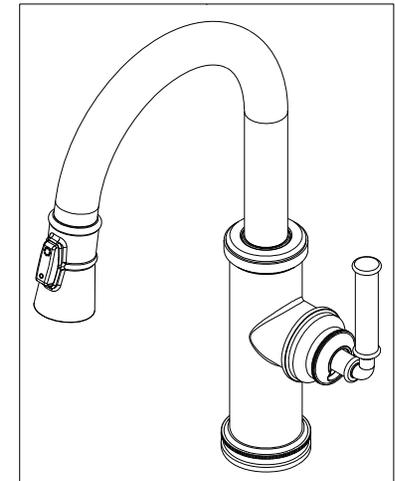


NOTES:

1. TO INSPECT ASSEMBLY, FOLLOW FIRST ARTICLE AND IN PROCESS INSPECTION SHEET.
2. PUT THESE ITEMS IN SEPARATE PLASTIC BAGS.
3. TORQUE TO 8 +/-0.5 LB-FT.
4. APPLY THIN COAT OF SILICON GREASE FOR ALL O-RINGS BEFORE INSTALLATION.
5. APPLY LOCTITE 242, IF SCREW DOES NOT HAVE NYLON PATCH.
6. APPLY LOCTITE 680.
7. PULL OUT HOSE AND APPLY SILICON GREASE, BETWEEN HOUSE AND SPOUT, 10" FROM OUTLET TO HOSE.
8. TORQUE SWIVEL NUT TO 19 +/-2 LB-IN.
9. TORQUE TO 10 +/-2 LB-FT.
10. TORQUE TO 7 +/-2 LB-IN.
11. PARTIALLY THREAD MOUNTING KIT ONTO SHANK.
12. DO NOT DOCK SPRAY HEAD TO SPOUT WHEN PACKAGING.

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	3-743	PREP FAUCET BASE ASM	ASSEMBLY	1
2	13670	COLLAR	PART	1
3	12837	HANDLE HUB	PART	1
4	11874	HANDLE ADAPTER SCREW	PART	1
5	20-315	HANDLE LEVER ASM	ASSEMBLY	1
6	20-153	BASE RING ASM	ASSEMBLY	1
7	3-571	SPRAY HEAD, TAFT	ASSEMBLY	1

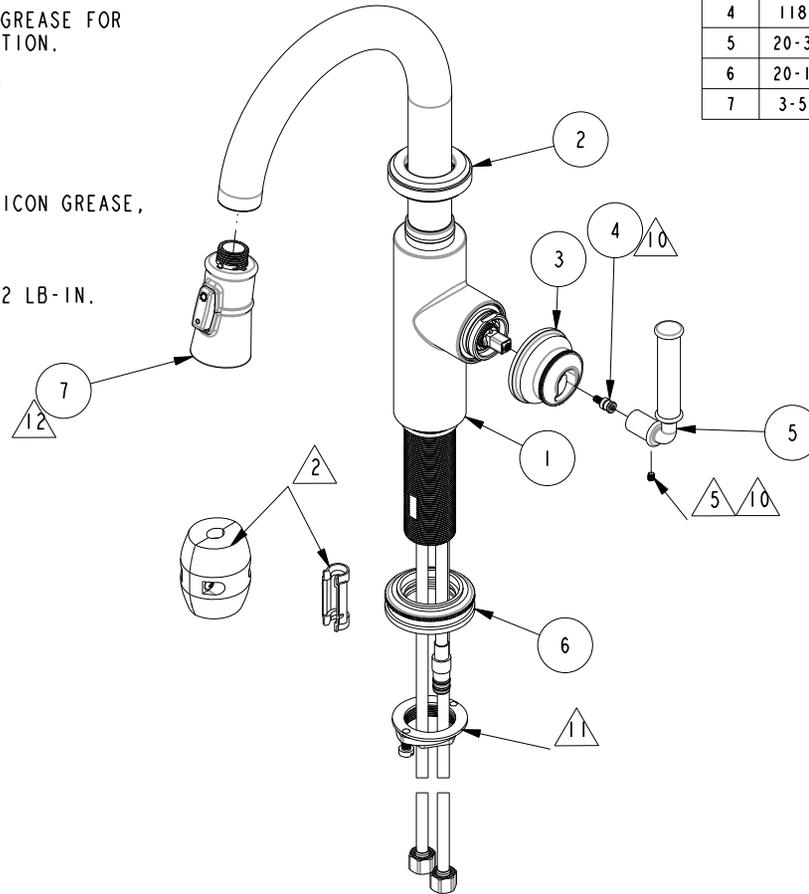

-	J	EN-4213D	08/09/21	C.G.
-	H	EN-4300s	07/01/21	R.S.
-	G	EN-4118o	11/11/20	G.B.
-	F	EN-4167	06/08/20	JMR
-	E	EN-4066	01/10/20	C.G.
-	D	EN-3931B	09/16/19	V.V.
-	C	EN-3413h	04/26/18	JM
-	B	EN-3413c	01/10/18	JM
-	A	EN-3034L	09/08/17	J.A
-	-	EN-2980	02/17/16	H.LE
ZONE	REV	DESCRIPTION	DATE	APPROVED

COPYRIGHT 2005 BRASSTECH, INC. THESE DRAWINGS AND THE DESIGNS DEPICTED HEREIN ARE THE PROPRIETARY PROPERTY OF BRASSTECH. ANY USE OR REPRODUCTION IS SUBJECT TO THE EXPRESS APPROVAL OF BRASSTECH. UNAUTHORIZED USE IS STRICTLY PROHIBITED. ALL RIGHTS RESERVED.

TESTING	-	-	-
ASSEMBLY	-	-	-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #	-	REMOVE ALL BURRS AND SHARP EDGES	

UNITS ARE: INCHES [MM]
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
±1/16" .X ±.1 [2.5] ±1°
.XX ±.06 [1.5]

(X.XXX) DENOTES CRITICAL DIMS.
ALL THREADS ARE CRITICAL

DRAWN	JINSON	07/01/21
CHECKED	R.S.	07/01/21
APPROVED	R.S.	07/01/21

BRASSTECH 2001 CARNEGIE AVE.
INCORPORATED SANTA ANA, CA 92705
(949) 417-5207

PERP/BAR PULL-DOWN FAUCET

DWG NO. **2940-5223** REV **J**

SCALE .200 REF. - SHEET 1 OF 2

