




Connectors > Automotive Connectors > Seals & Cavity Plugs

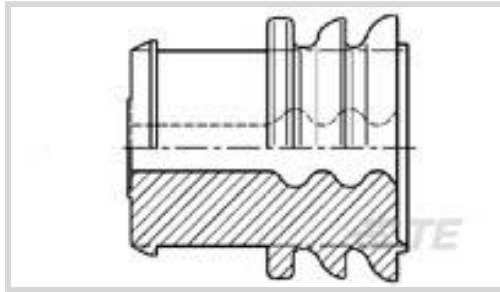

Connector Seal Type: **Single Wire Seal (SWS)**

Cavity Diameter: **7.2 mm [.283 in]**

Accepts Cable Insulation Diameter Range: **1.4 – 2.1 mm [.055 – .083 in]**

Seal Material: **Silicone**

Resistance to Hydrocarbons: **Poor**

Features

Product Type Features

Connector Seal Type	Single Wire Seal (SWS)
---------------------	------------------------

Body Features

Seal Material	Silicone
Primary Product Color	Blue

Dimensions

Cavity Diameter	7.2 mm[.283 in]
Accepts Cable Insulation Diameter Range	1.4 – 2.1 mm[.055 – .083 in]

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C [149 °F][158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]

Industry Standards

UL Flammability Rating	None
------------------------	------

Other

Resistance to Hydrocarbons	Poor
Shore A Hardness	50



Contains Lubricant	Yes
--------------------	-----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 4-1579007-3
EXTRACTION TOOL KIT










TE Part # 1-1579007-6
EXTRACTION TOOL

TE Part # CAT-T4827-T273
TIMER, RECEPTACLE AND TAB

TE Part # CAT-T4827-CH8172
TIMER, CONNECTOR HOUSING



Also in the Series | Timer Connector System

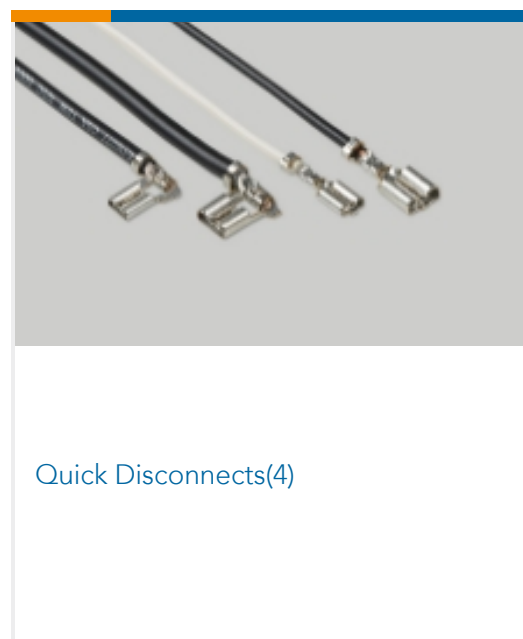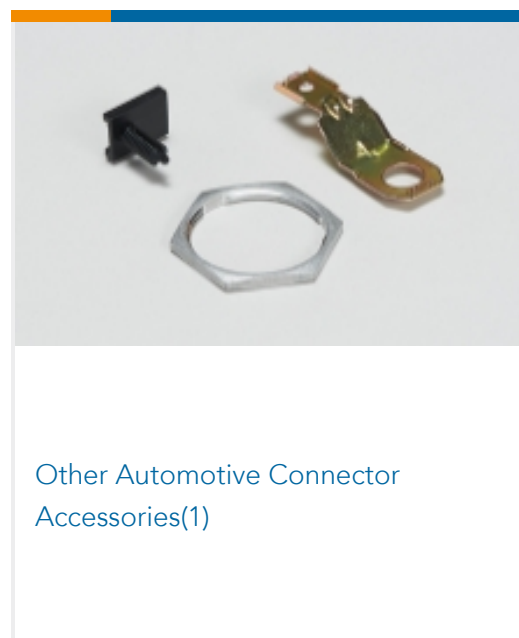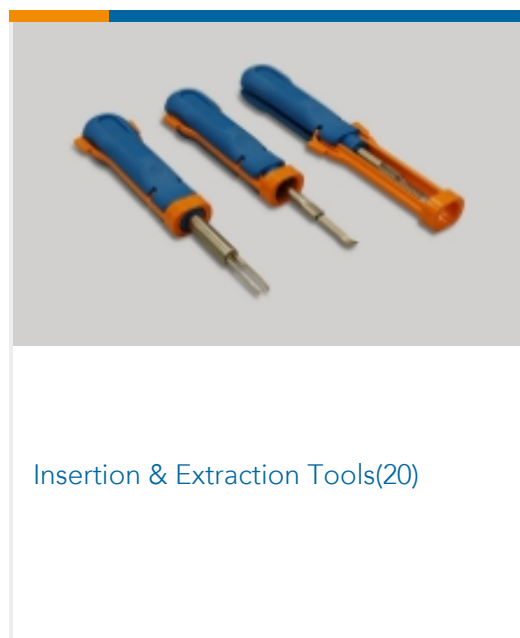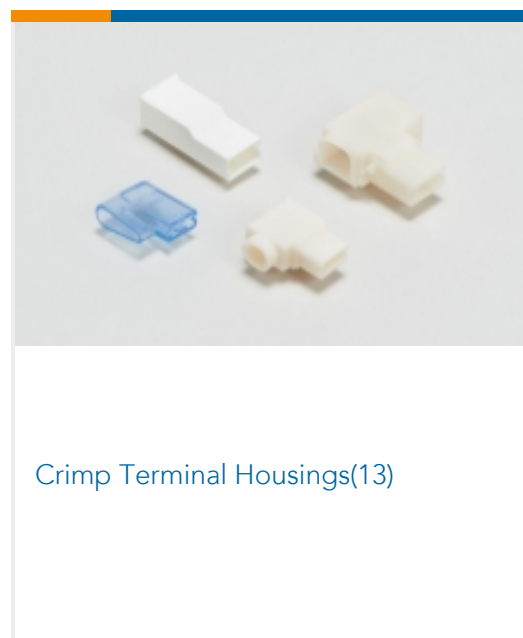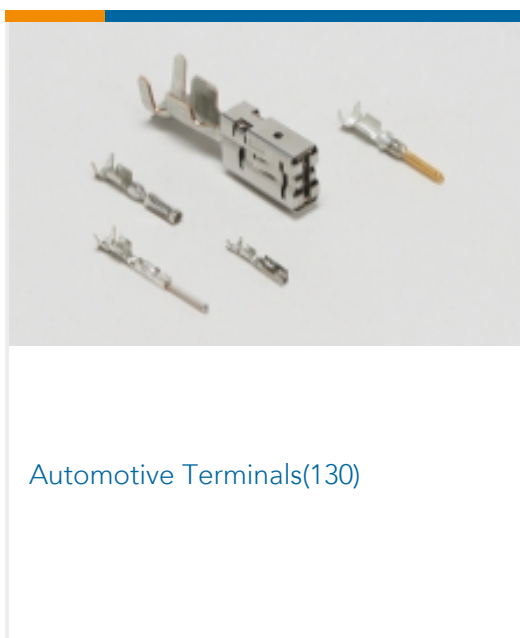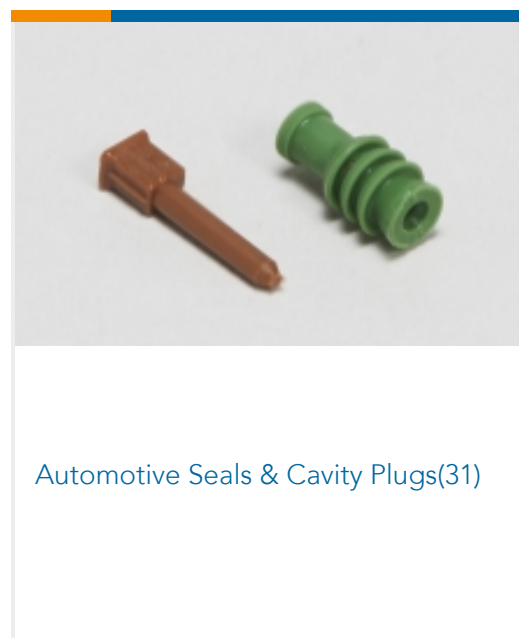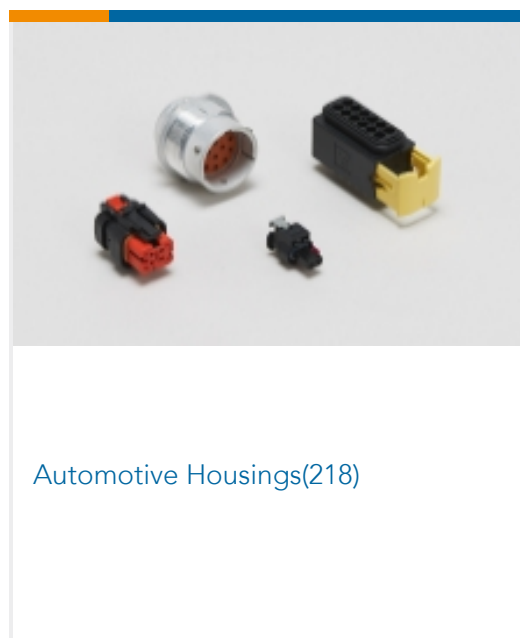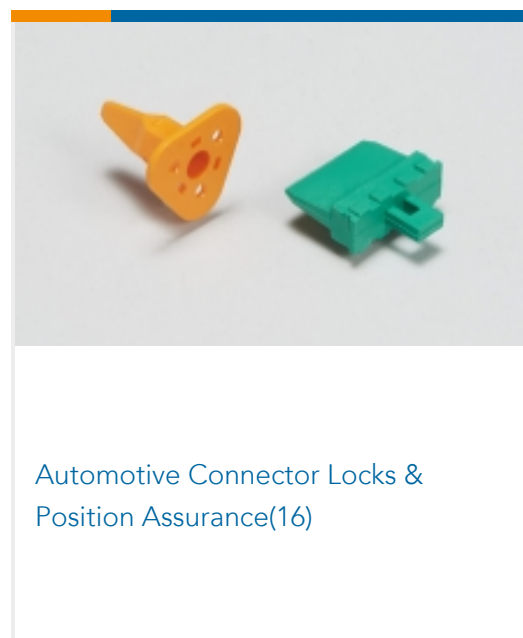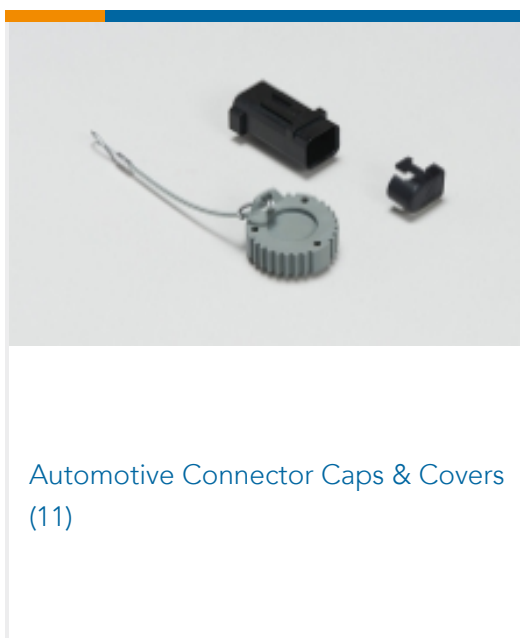

Documents



Product Drawings

EINZELDRAHTDICHTUNG

English

CAD Files

Customer View Model

ENG_CVM_963243-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_963243-1_B.3d_stp.zip

English

Customer View Model

ENG_CVM_963243-1_B.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

CAVITY PLUG (HYB 38P ISL PLUG)

English

Product Specification

English

5 Position Std Power Timer Splash Proof Female Connector

English

DIESEL GLOW PLUG 1POSITION HOUSING

Japanese

Product Specification

Japanese